




WallyPacholka / AstroPics.com

© Wally Pacholka. Milky Way over Monument Valley. Used by Permission.

# Astrometry goes back over 5000 years!

Credit: Heritage Malta

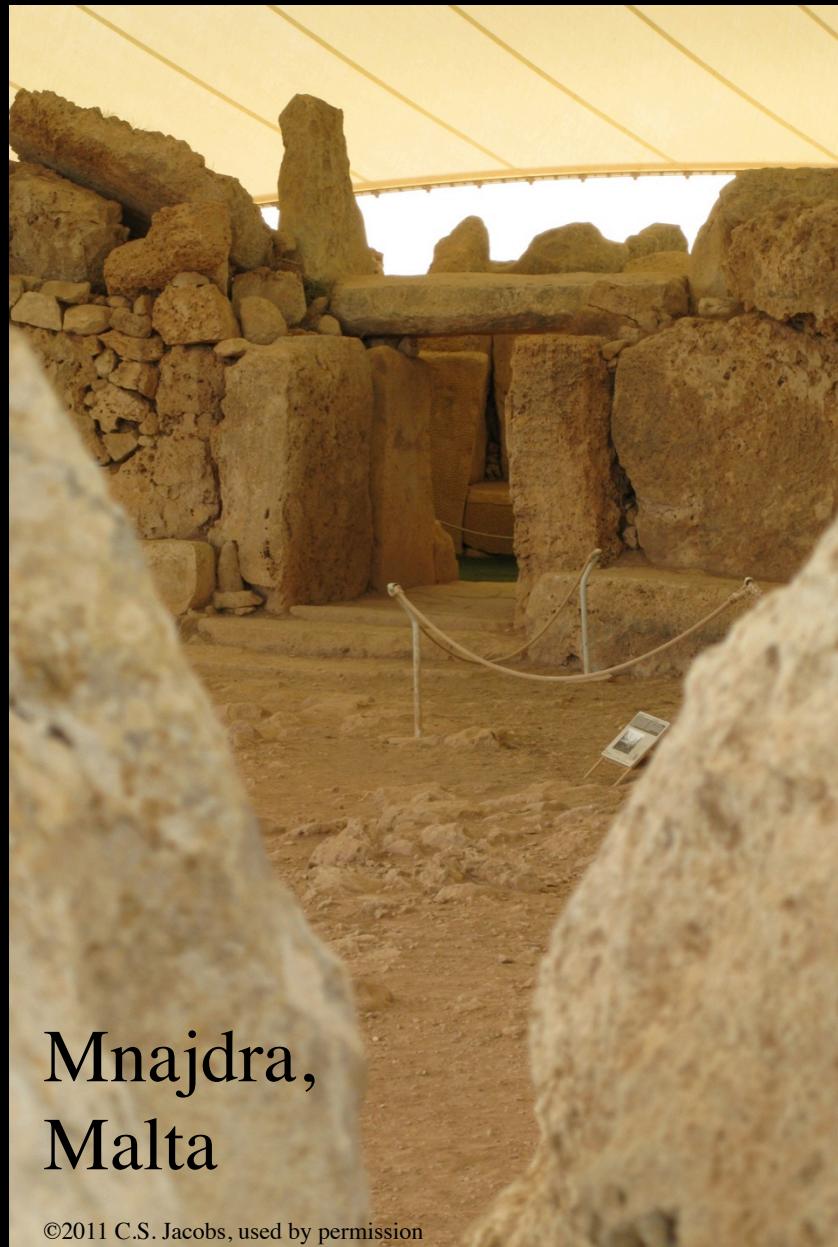


Mnajdra,  
Malta

©2011 C.S. Jacobs, used by permission


Island of Malta  
Ggantija ~3500 B.C.  
Mnajdra ~3200 B.C.




Mnajdra solar alignments

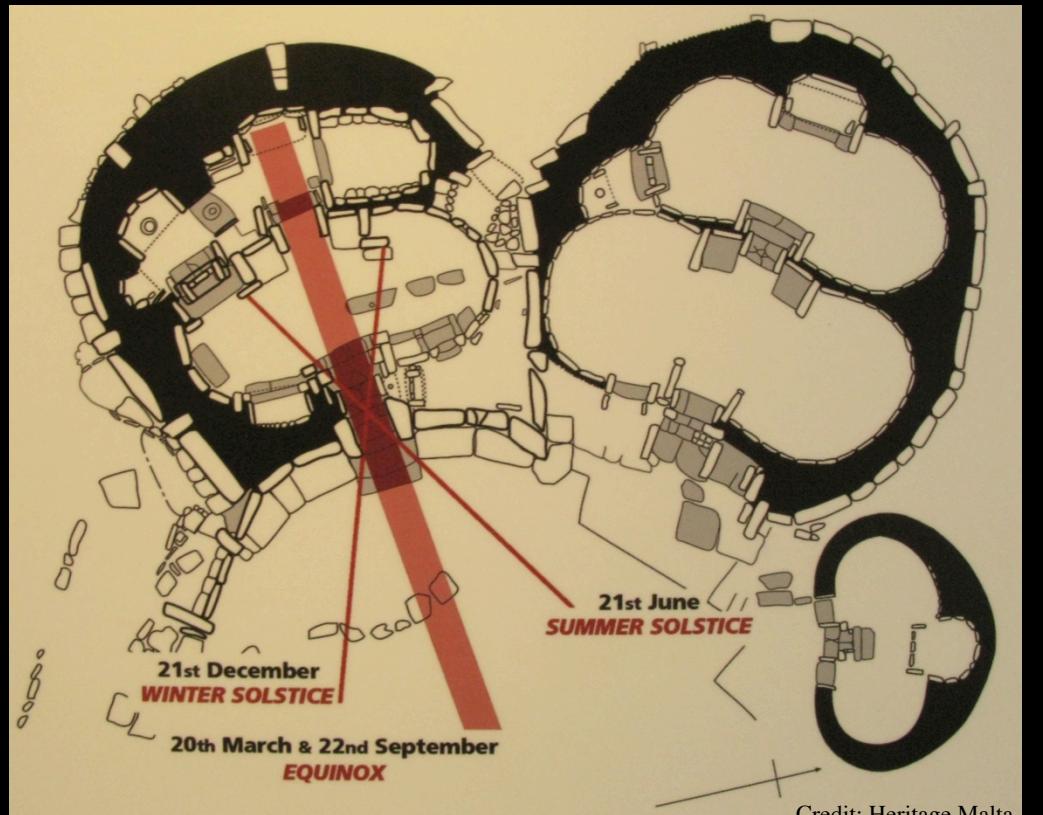

Credit: Heritage Malta

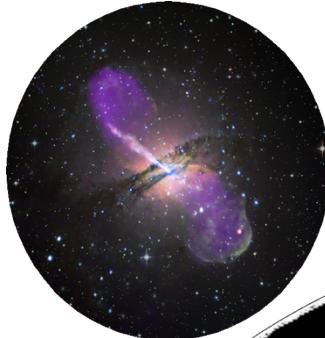

# Celestial Reference Frames

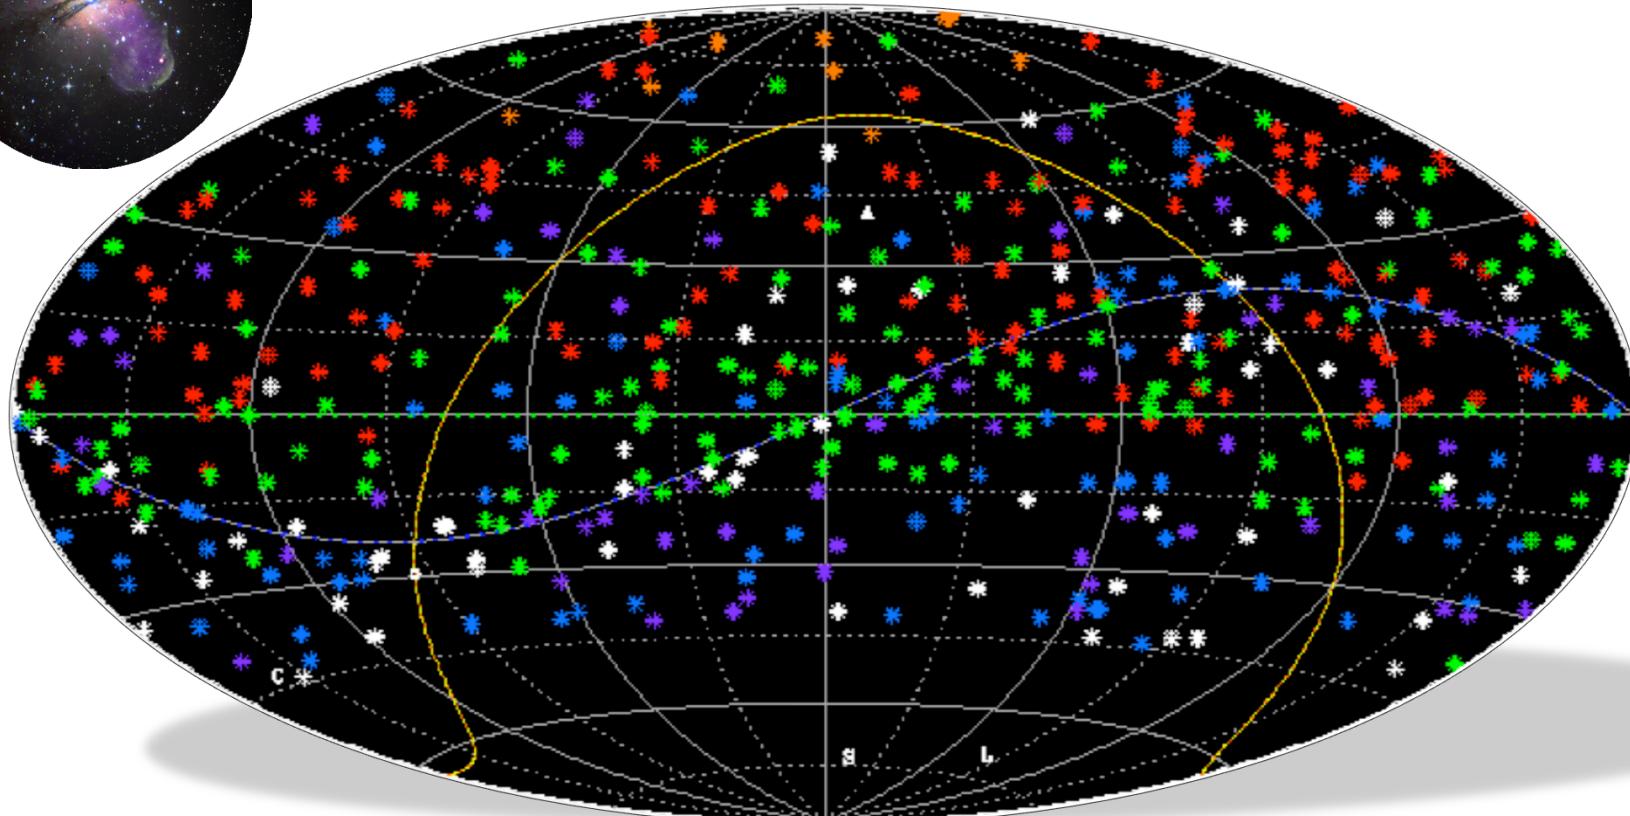

Christopher S. Jacobs

Jet Propulsion Laboratory, California Institute of Technology

5 March 2013



# Outline



## I. Concepts and Background:

- A. What is a Reference frame? Concepts, uses, desired properties
- B. Networks: The instruments used to build the frame
  - ad hoc, VLBA, EVN, Global, DSN, LBA, AuScope, etc.
- C. Brief history of Astrometry: The ‘fixed’ stars aren’t so fixed.
  - 1. Precession, proper motion, nutation, parallax
  - 2. Invention of radio astronomy. VLBI’s pursuit of (sub)milli-arsecond accuracy.

## II. Celestial Frames built using VLBI

- A. Surveys: Single dish, connected array: JVAs, AT20G, and VLBI: VCS, LCS
- B. ICRF-1, ICRF-2: The IAU moves to from optical (stars) to radio (quasars)
- C. Higher frequency radio frames: K&Q (24 & 43GHz), X/Ka (32 GHz)

## III. The Path to the Future:

- A. Error Budgets: a tool for allocating resources for improvement
- B. Case study: Path to Improved X/Ka (8.4/32 GHz) Frame
- C. ICRF-3: the next standard radio frame
- D. Gaia: an optical frame with high accuracy, billion sources



# I. A. Concepts for Celestial Frames

JPL

## 1. Questions:

Why do we need reference frames? Celestial Frames?  
Time, positions, velocities

## 2. The Celestial Frames

Terrestrial:	Azimuth,	Elevation
Equatorial plane:	Right Ascension	& Declination
Ecliptic Plane:	Ecliptic Longitude	& Latitude
Galactic Plane:	Galactic Longitude	& Latitude

## 3. Inertial Frames

- No rotation
- No acceleration
- Quasi-inertial



## I. A.1 Why a Celestial Frame?

JPL

Questions:

Why do we need reference frames? Celestial Frames?

To measure Time, positions, and velocities

Time: The rotation of the earth

Positions & velocities:

Angular positions and distances of  
Quasars, galaxies, stars, planets, spacecraft



## I. A.2 The Celestial Sphere

JPL

Preferred Frame changes with scale and application


- **Local terrestrial:** Elevation, Azimuth  
Local gravity or normal to horizon gives preferred direction  
Useful for antenna pointing
- **Equatorial plane:** Right Ascension & Declination  
Earth's spin gives preferred direction
- **Ecliptic Plane:** Ecliptic longitude & latitude  
plane of solar system, planetary orbits  
useful for studying the solar system and  
inter-planetary navigation
- **Galactic Plane:** Galactic Longitude & latitude  
plane of Milky Way galaxy  
Useful for pulsars, masers, rotation curves...
- **Even larger structure:** local group of galaxies, Virgo cluster, ...



## I. A.2 Local Horizon: Azimuth, Elevation

JPL

- Local terrestrial: **Elevation, Azimuth**  
Local gravity or normal to horizon gives preferred direction  
Useful for antenna pointing

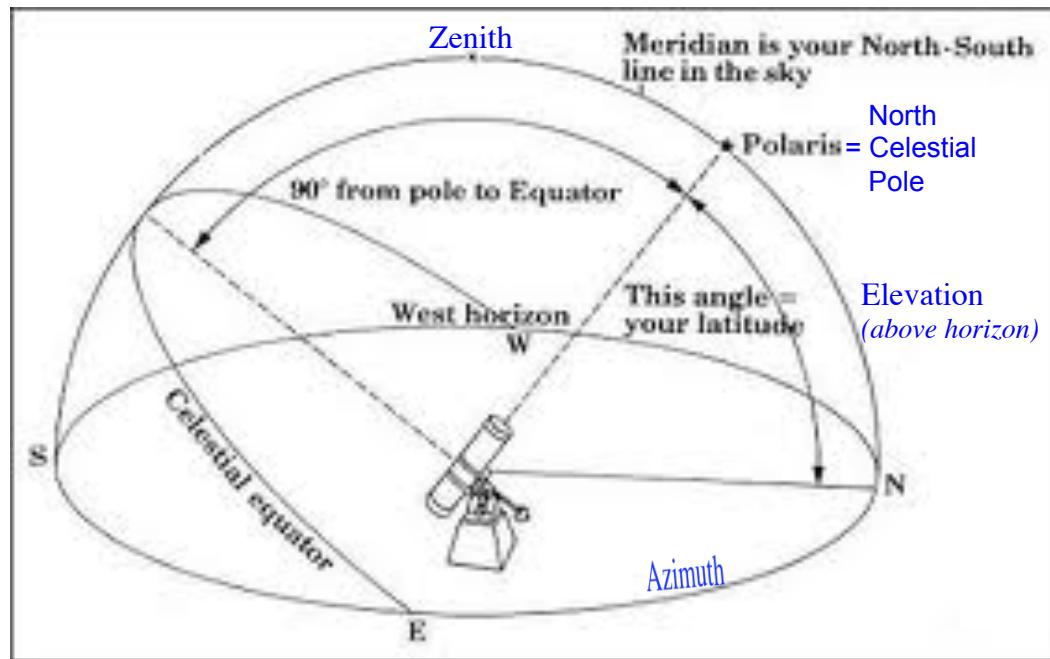

## I. A.2 The Celestial Sphere

### Equatorial System:


Earth's spin axis gives preferred direction, the celestial pole

### Coordinates on the sky:

Right Ascension ("longitude")  
Declination ("latitude")

### Ecliptic Plane:

Ecliptic Longitude &  
Ecliptic Latitude  
plane of solar system  
useful for studying the  
solar system and  
inter-planetary navigation

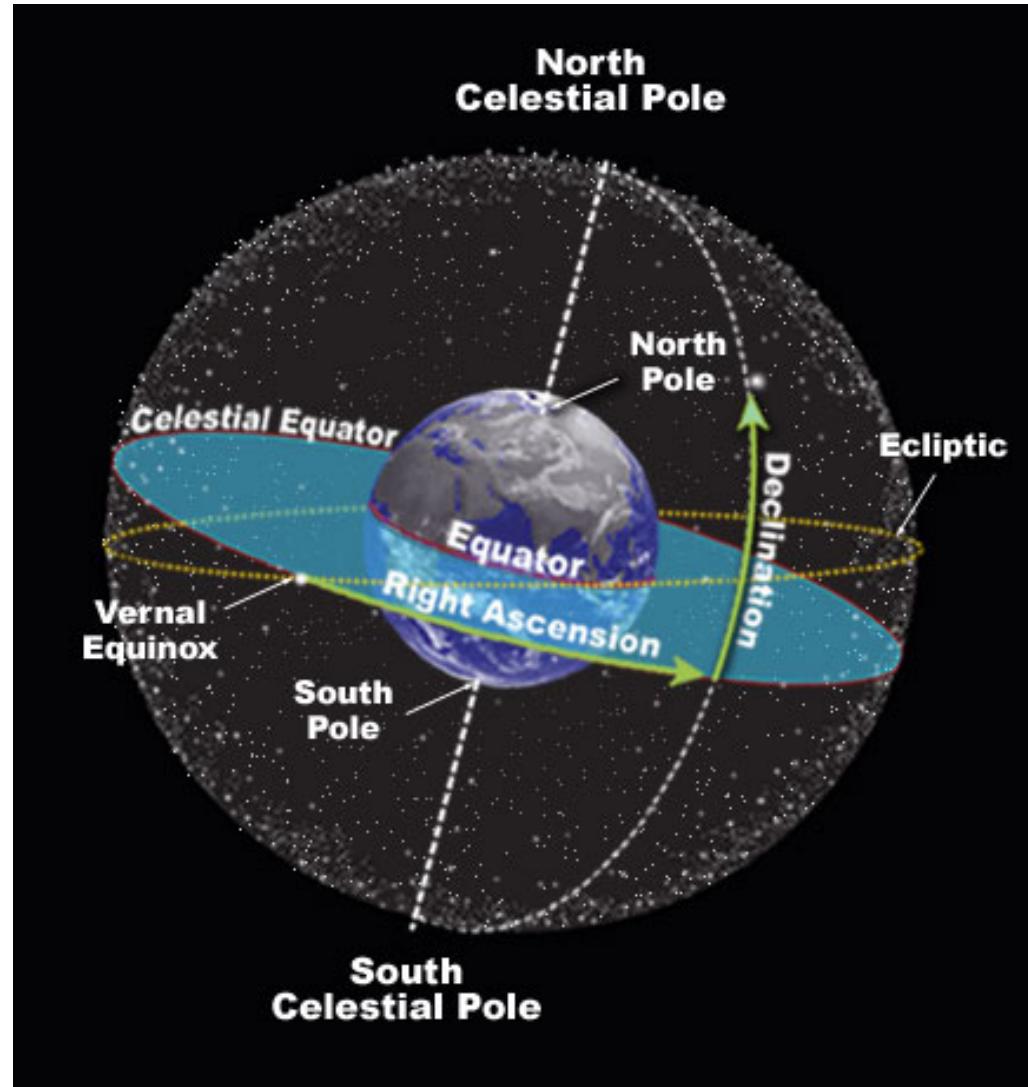



Credit: <http://www.daviddarling.info/encyclopedia/C/celsphere.html>



## I. A.2 The Celestial Sphere


JPL

- Galactic Plane: Galactic Longitude,  $l$ , & Galactic latitude,  $b$   
Useful for pulsars,  
masers, rotation curves...

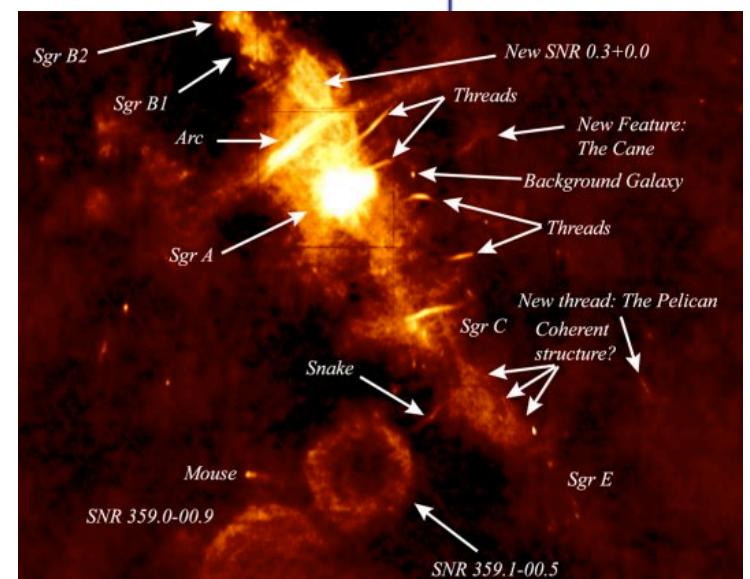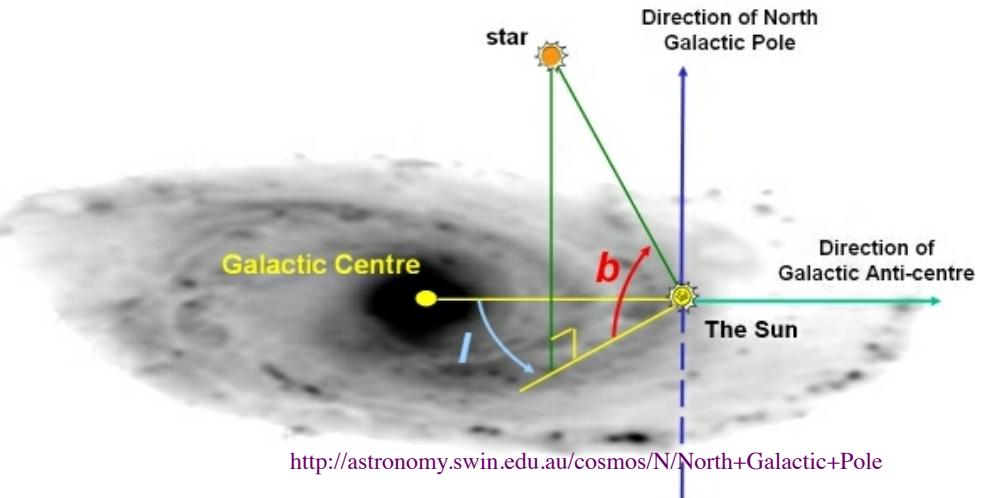


## I. A.2 The Celestial Sphere

- How far before we get to the quasars? Even larger structures: local group of galaxies, Virgo cluster, Virgo super cluster...

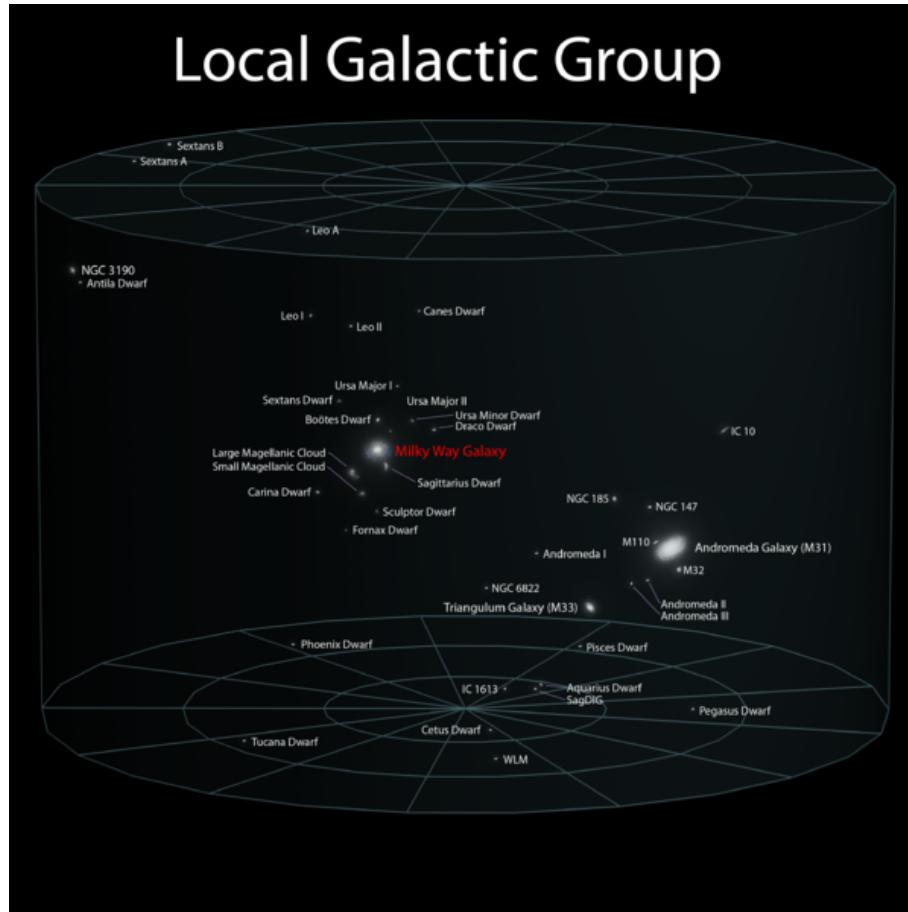


~3 Million light years

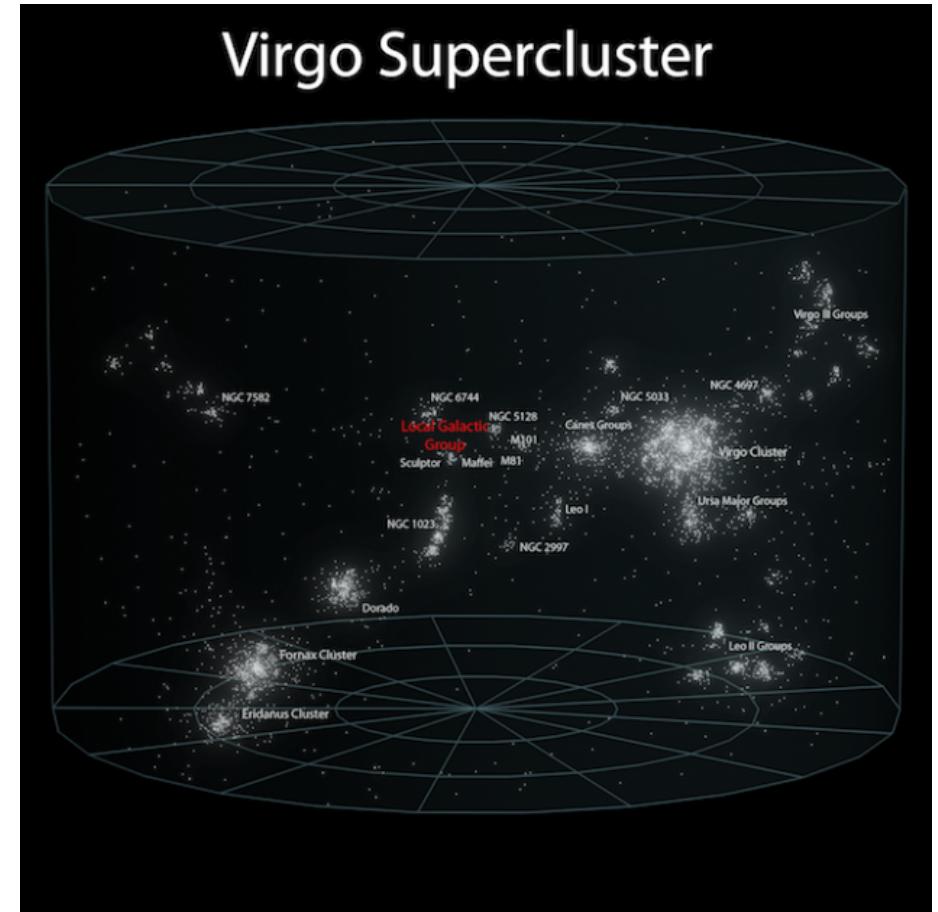

~100 Million light years



# Quasars ~ Gigaparsec; Virgo cluster distance (50 Mpc)

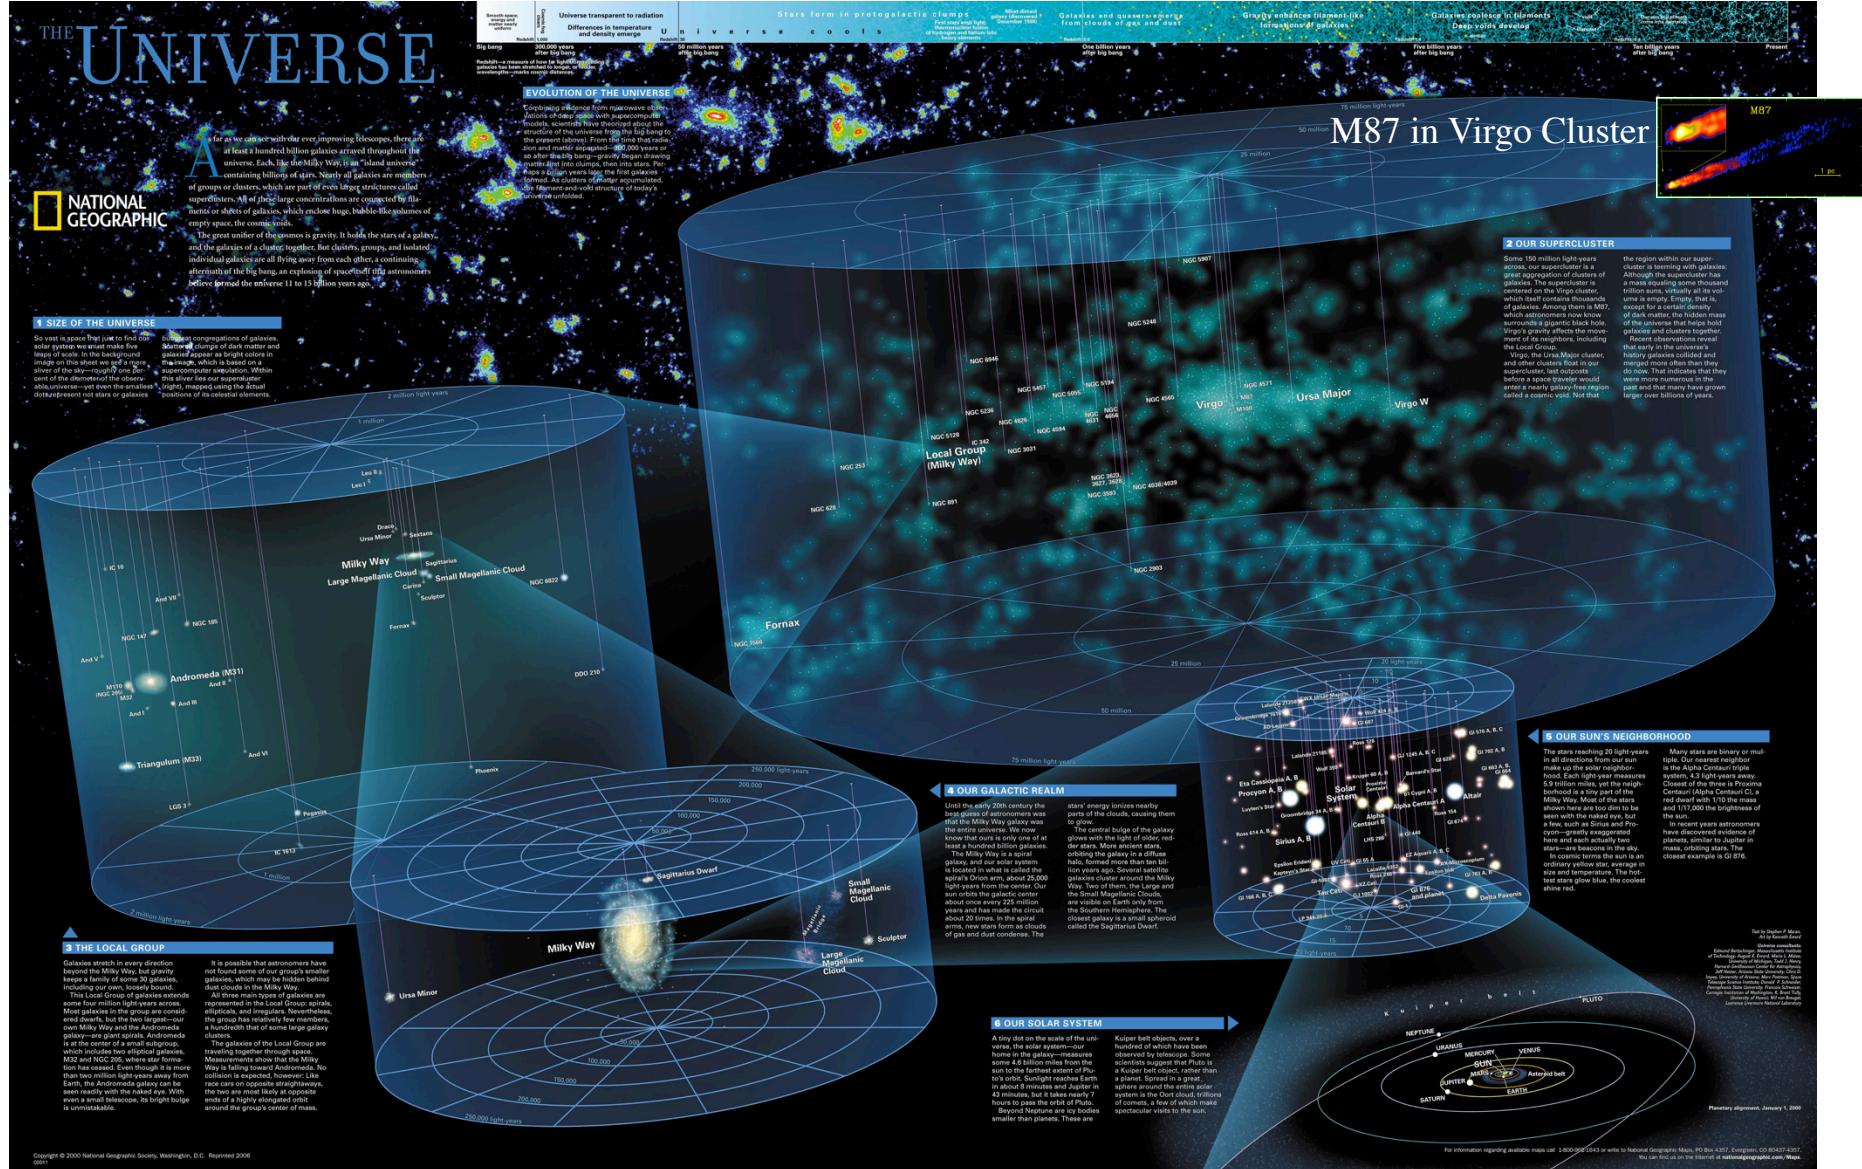

## I. A.3 Inertial Frames

- Why an Inertial Frame?

Make the calculations easy! Avoid Coriolis forces etc.

No rotation


No acceleration

- Quasi-inertial

In real systems we have some unmodeled accelerations

At present, VLBI doesn't yet model acceleration toward the Galactic center, but this is being studied

e.g. Titov et al <http://arxiv.org/pdf/1301.0364v1.pdf>

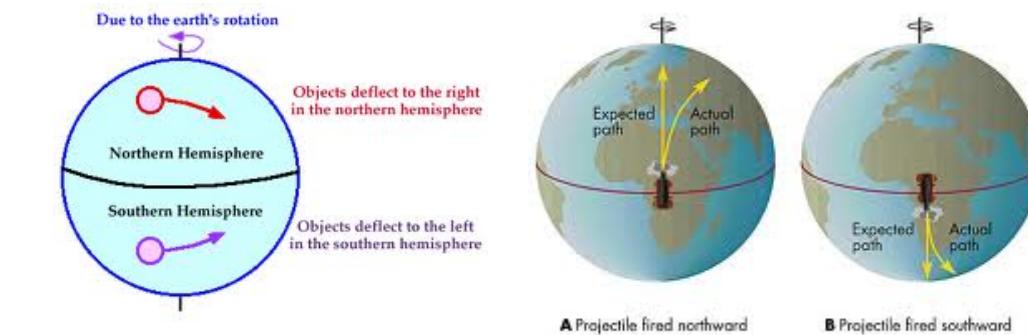


Univ. Illinois WW2010 Project  
[http://ww2010.atmos.uiuc.edu/\(Gh\)/guides/mtr/fw/crls.rxml](http://ww2010.atmos.uiuc.edu/(Gh)/guides/mtr/fw/crls.rxml)

- VLBI uses quasi-inertial frame with origin at the Solar System Barycenter (center of mass)



# How Does VLBI Work? It's Simple ;-)

JPL

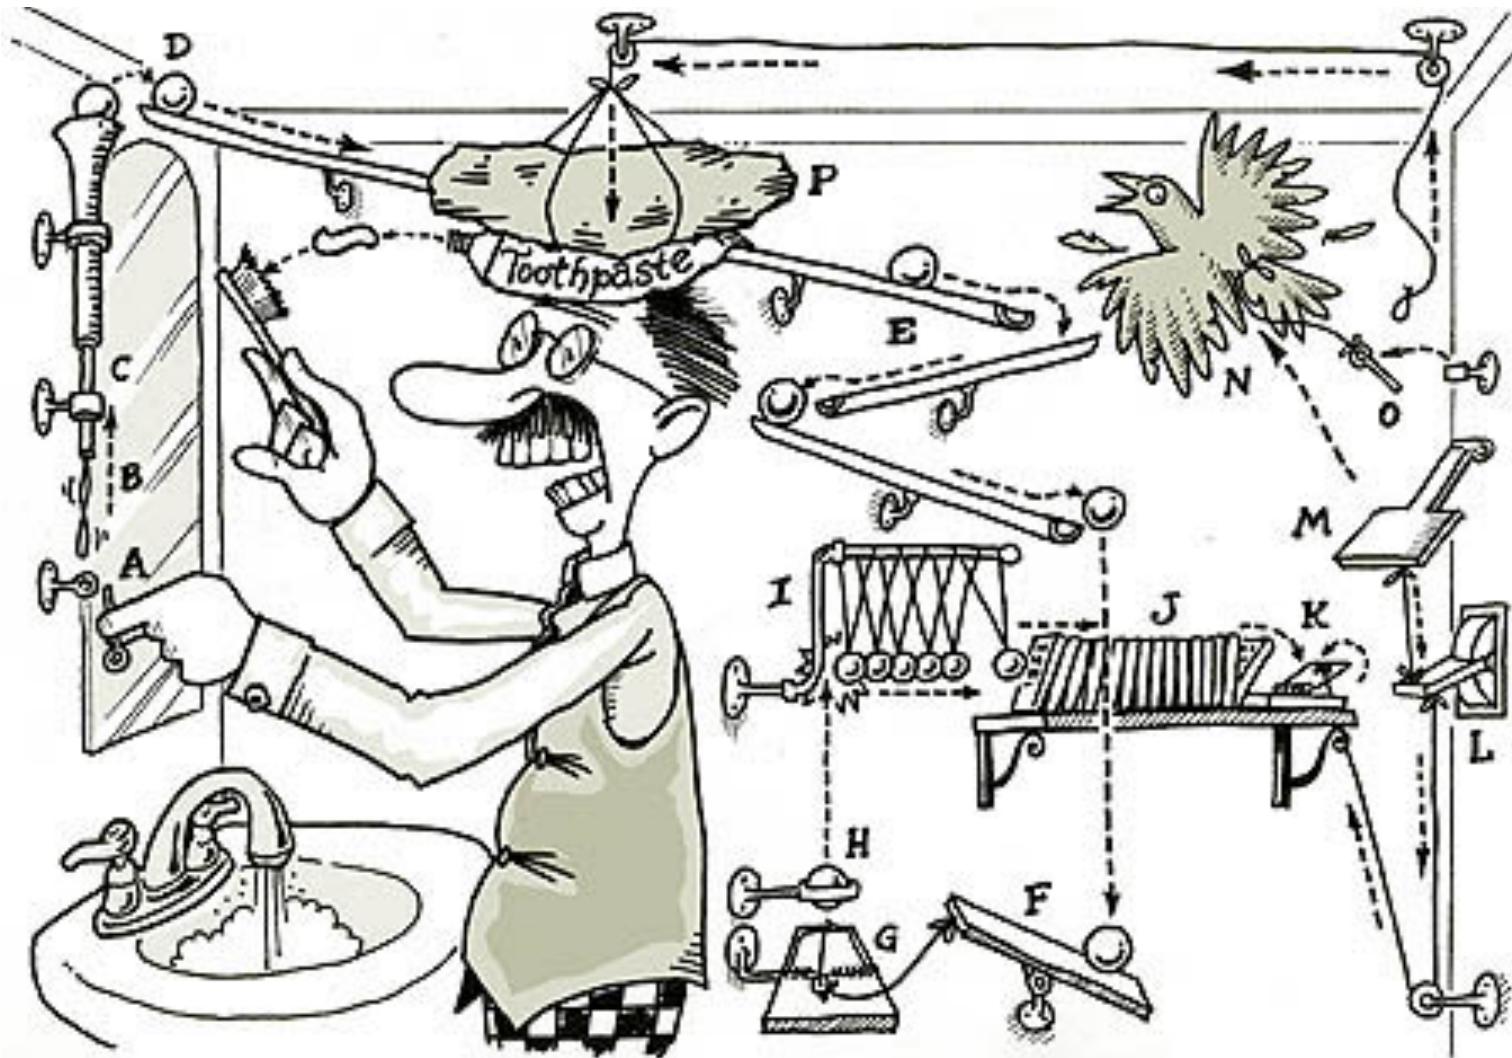

*Cartoon credit: Rube Goldberg*




# How Does VLBI Work?


*Combine signals  
from a  
Phased Array*

# Antennas are Mechanical Arrays

Single Large Dish  
is an “array” of  
panels aligned  
mechanically.  
Note side lobes.

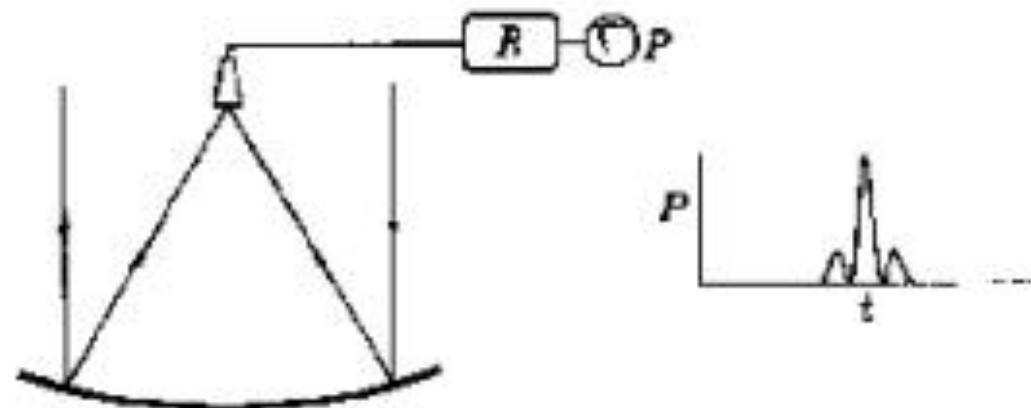


Imagine removing  
inner panels, then  
beam pattern changes,  
sidelobes rise, but  
center lobe still has  
high resolution  
 $\sim \text{wavelength} / D$

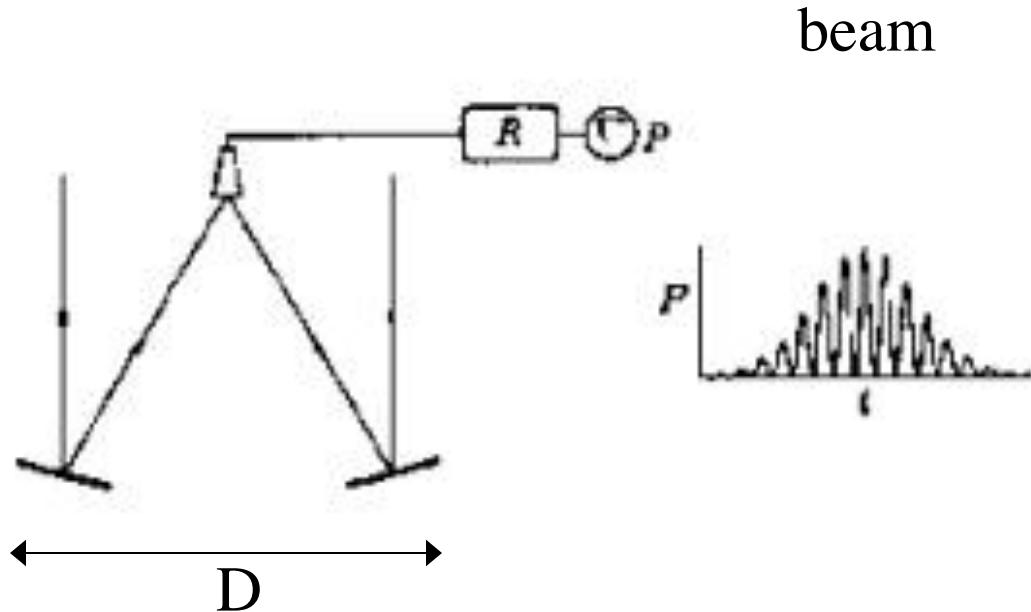

Two segments  
of antenna

b)

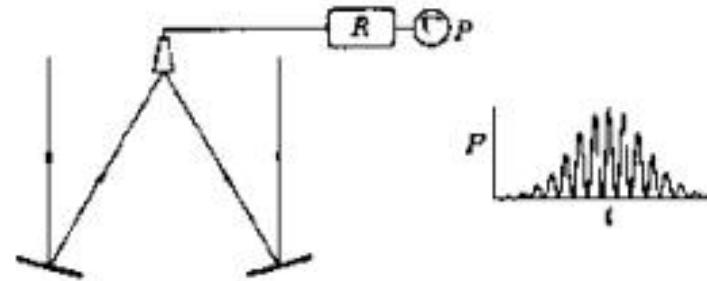


Two separate  
antennas with  
Electrical  
Connection

c)



Unconnected  
Antennas = VLBI  
Time tag data and  
combine signals later at correlator

d)

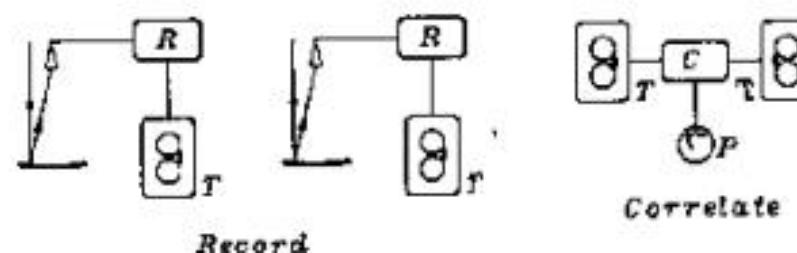


Same fringes  
as b).

Same fringes  
as b).

## Very Long Baseline Interferometry is a type of station differenced range

- Measures geometric delay by cross-correlating signal from two (2) stations

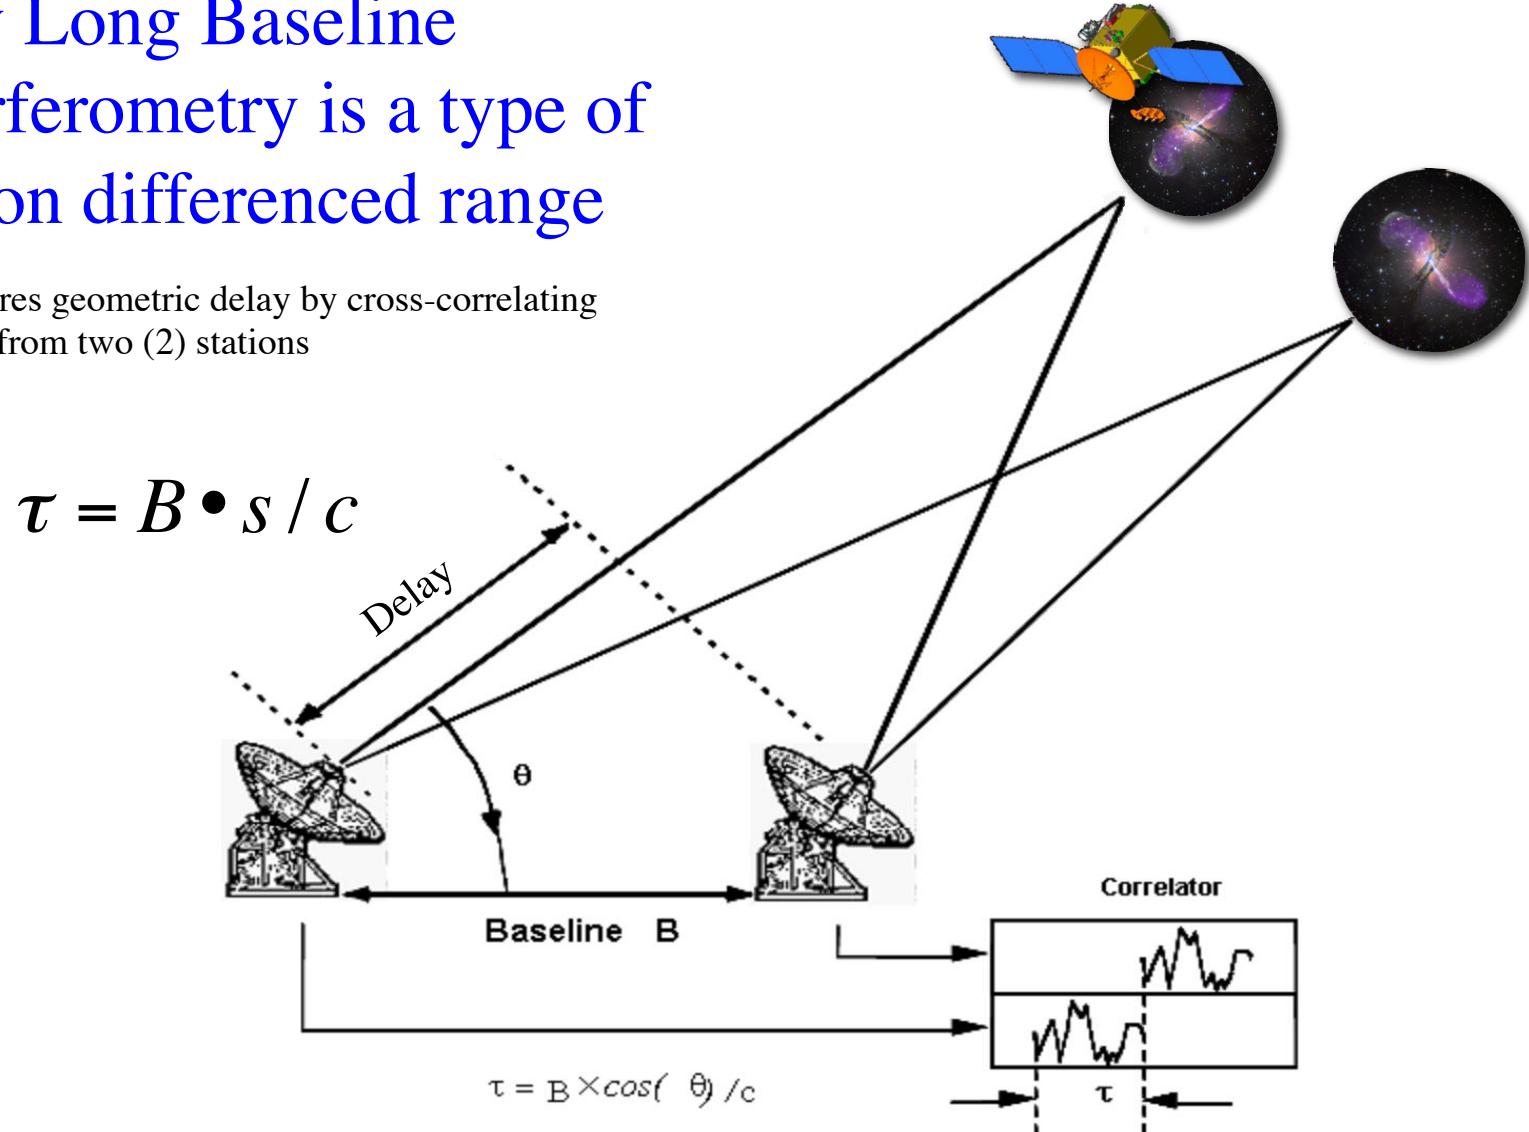



# Outline

JPL

## I. Concepts and Background:

- A. What is a Reference frame? Concepts, uses, desired properties
- B. Networks: The instruments used to build the frame  
ad hoc, VLBA, EVN, Global, DSN, LBA, AuScope, etc.**
- C. Brief history of Astrometry: The ‘fixed’ stars aren’t so fixed.
  - 1. Precession, proper motion, nutation, parallax
  - 2. Invention of radio astronomy. VLBI’s pursuit of (sub)milli-arsecond accuracy.

## II. Celestial Frames built using VLBI

- A. Surveys: Single dish, connected array: JVAs, AT20G, and VLBI: VCS, LCS
- B. ICRF-1, ICRF-2: The IAU moves to from optical (stars) to radio (quasars)
- C. Higher frequency radio frames: K&Q (24 & 43GHz), X/Ka (32 GHz)

## III. The Path to the Future:

- A. Error Budgets: a tool for allocating resources for improvement
- B. Case study: Path to Improved X/Ka (8.4/32 GHz) Frame
- C. ICRF-3: the next standard radio frame
- D. Gaia: an optical frame with high accuracy



## I.B. Observing Networks

JPL

### VLBA


S/X VCS catalog  
K, Q catalogs

25-meter dishes

10 stations

Baselines up to  
8000 km

No southern  
stations

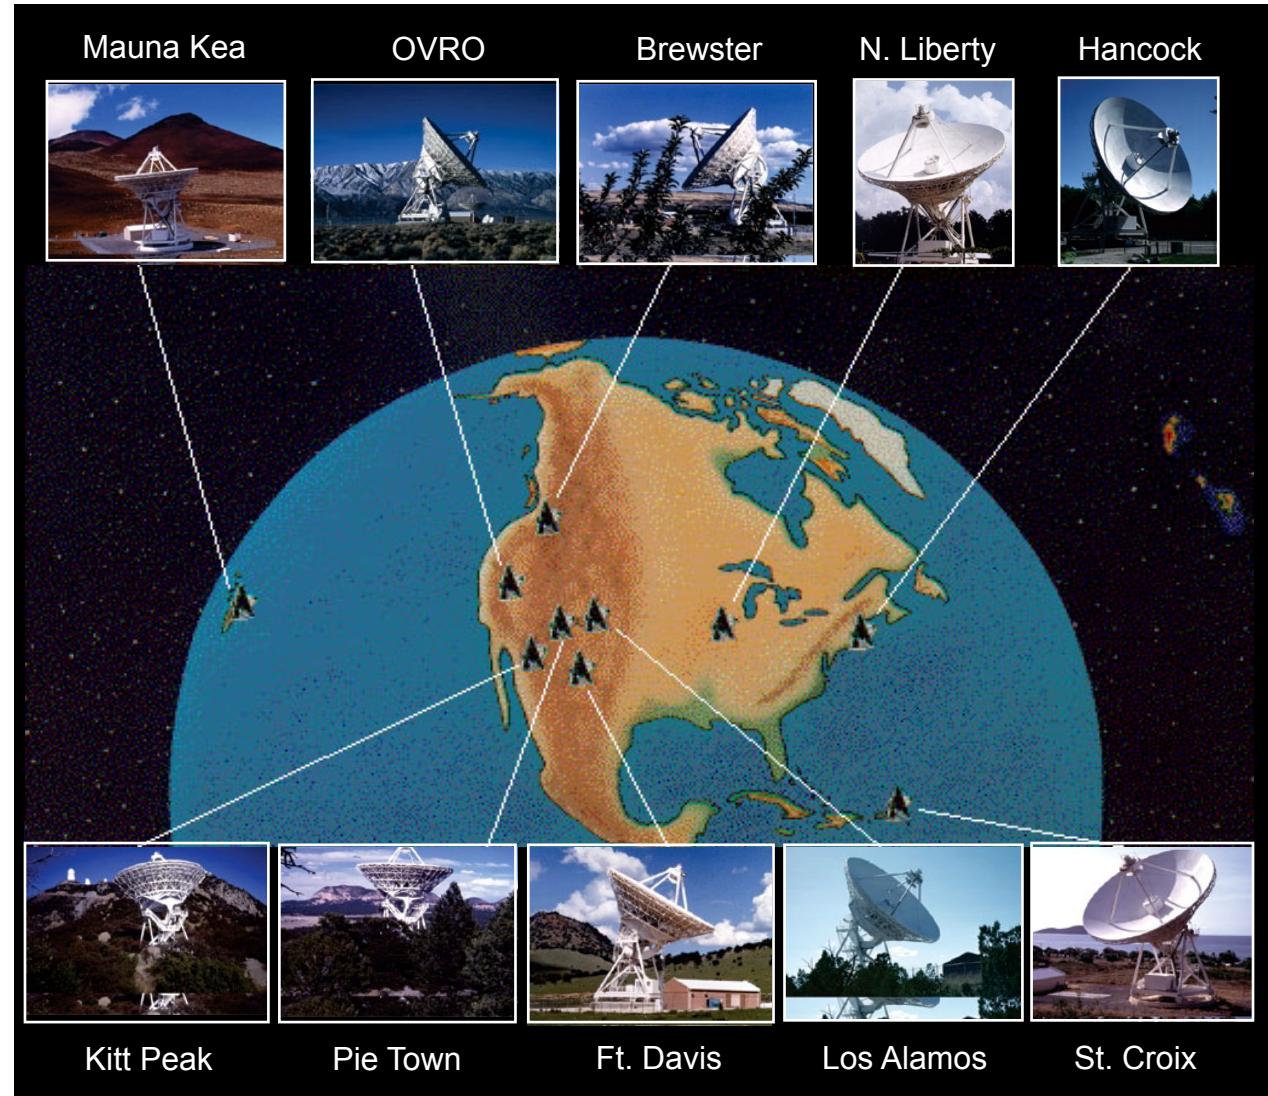

<http://www.vlba.nrao.edu/>

## I.B. Observing Networks: EVN

EVN

S/X-band  
K-band

Inhomogeneous  
set of antennas

+ HartRAO  
South Africa



<http://www.evlbi.org/>


# I.B. Observing Networks: Global



Map credit: Tae-Hyun, Jung (MPIfR, 2004)  
<http://www3.mpifr-bonn.mpg.de/staff/tkrichbaum/Global-VLBI.html>



## I.B. Spacecraft Ka Deep Space Networks

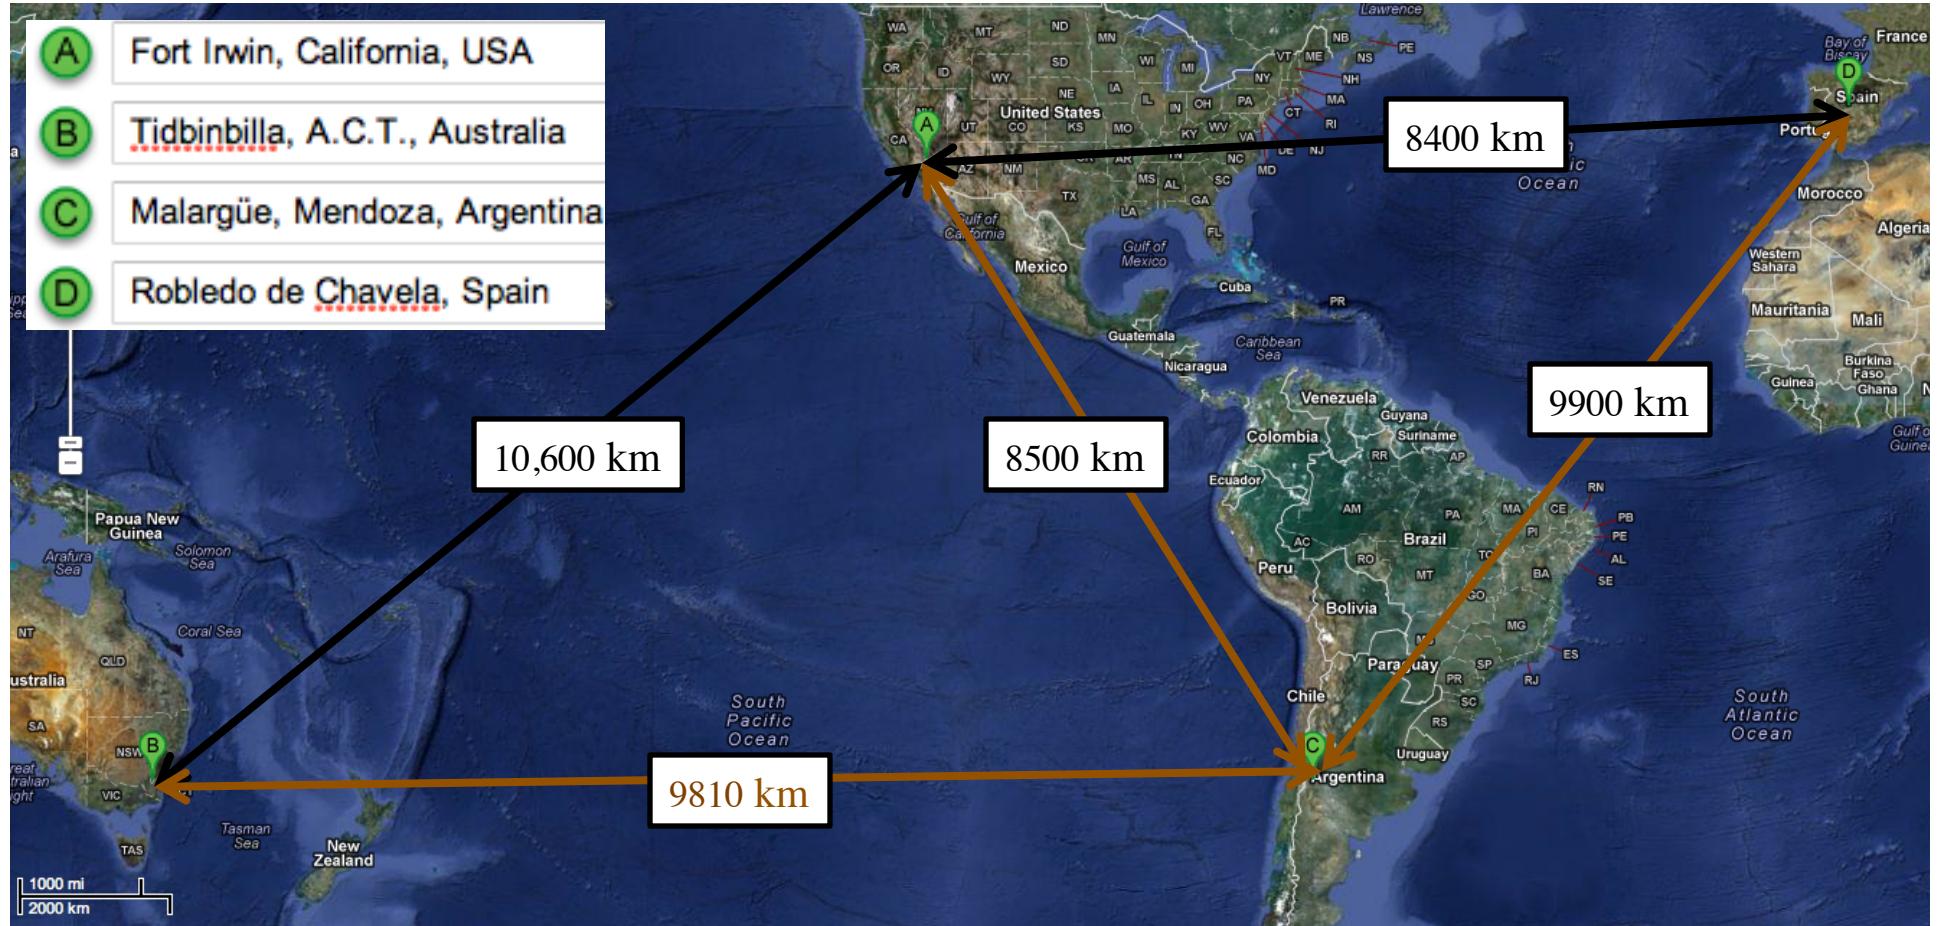

ESA's Argentina 35-meter antenna **adds 3 baselines** to DSN's 2 baselines

- Full sky coverage by accessing south polar cap
- near perpendicular mid-latitude baselines: CA to Aust./Argentina

Maps credit: Google maps



# I.C. History of Astrometry

JPL

130 B.C. Hipparchus      Precession      50 asec/yr

*Telescope era:*

1718 A.D. Halley      proper motions      1 asec/yr

1729      Bradley      annual aberration      20 asec

1730      Bradley      18.6yr nutation      9 asec

1838      Bessel      parallax      ~ asec

1930s      Jansky, Reber      Radio astronomy

1960s      *several groups*      Very Long Baseline Interferometry (VLBI) invented

1970s      "      VLBI      sub-asec

1980s      "      "      few 0.001 asec

1990s      "      "      < 0.001 asec

2000s      "      "      ~0.0001 asec

2010s      Gaia      Optical astrometry      70  $\mu$ as for Vmag=18 quasar

2010s      ICRF-3, ESA-DSN XKa      20-70  $\mu$ as? 0.3 Jy quasar



# Paradigm of “Sailing by the stars”

JPL



1

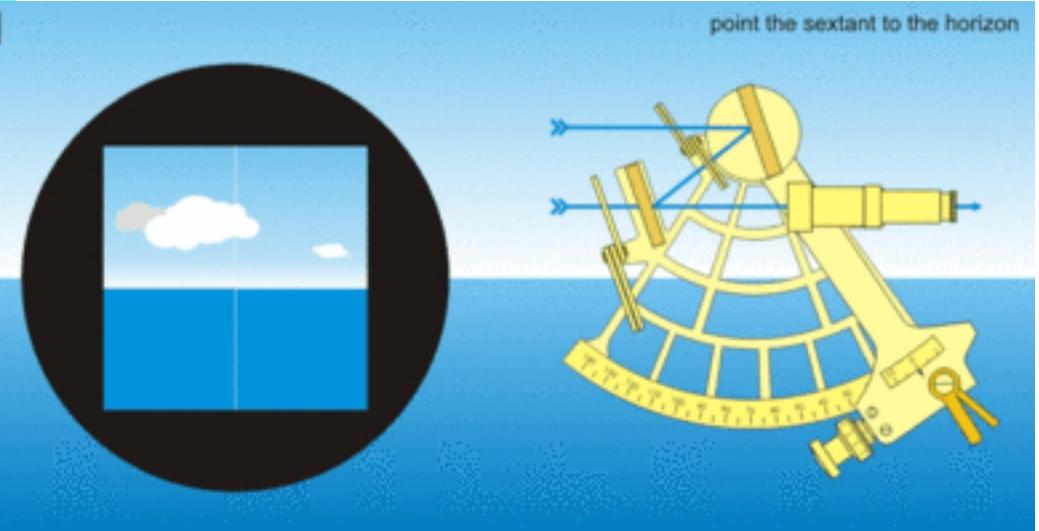



Photo Credit: Dimitry Bobroff, [www.ludmillaalexander.com](http://www.ludmillaalexander.com)



# NASA Navigation System Accuracy

JPL

1959-2015

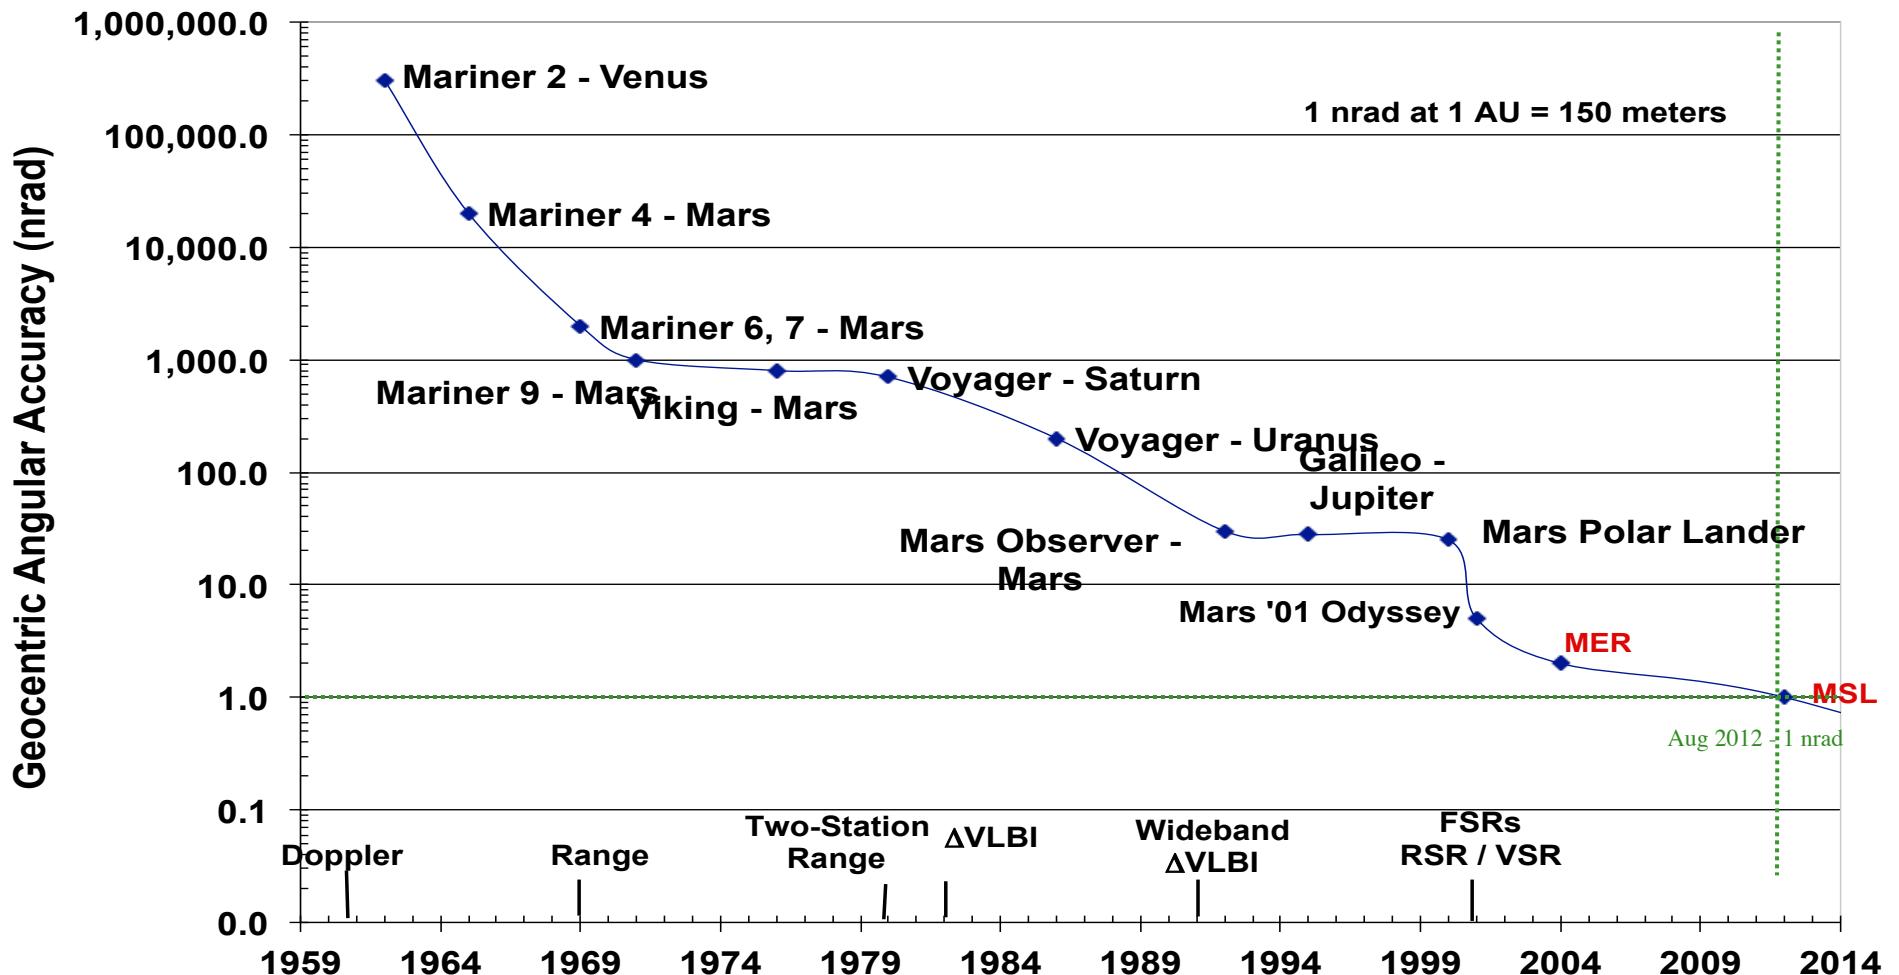

Credit: J.E. Patterson, J.S. Border, C.S. Jacobs



# How Does VLBI Work?



## How does VLBI work?

- Point source at infinity as a direction reference

Extragalactic “nebulae” idea from

Laplace (1749-1827) and

Wm. Herschel (1738-1822): *in 1785*

*realized that “nebulae” likely very distant*

‘On the Construction of the Heavens,’ Ph.Trans.Roy.Soc., 1785, p. 213 ff.

- Advantage: sources don’t move

BUT at a distance of a *billion* light years . . .

- The price to be paid is

Very weak sources

$1 \text{ Jy} = 1.0\text{E-26 watt/m}^{**2}/\text{Hz}$

need lots of square meters


$\Rightarrow 34 - 70\text{m Antenna}$

lots of Hz bandwidth

$\Rightarrow 0.1 \text{ to } 4 \text{ Gbps}$

low system temperature


$\Rightarrow T_{\text{sys}} = 20 - 40 \text{ Kelvin}$

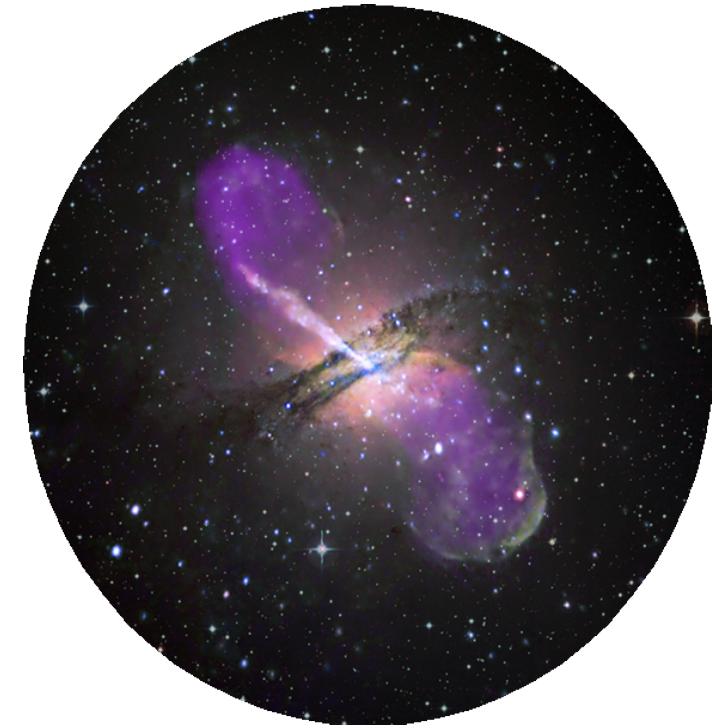

Credit: chandra.harvard.edu/photo/2008/cena/cena\_multi.jpg




# Why observe in Radio? The ‘Window’ **JPL**

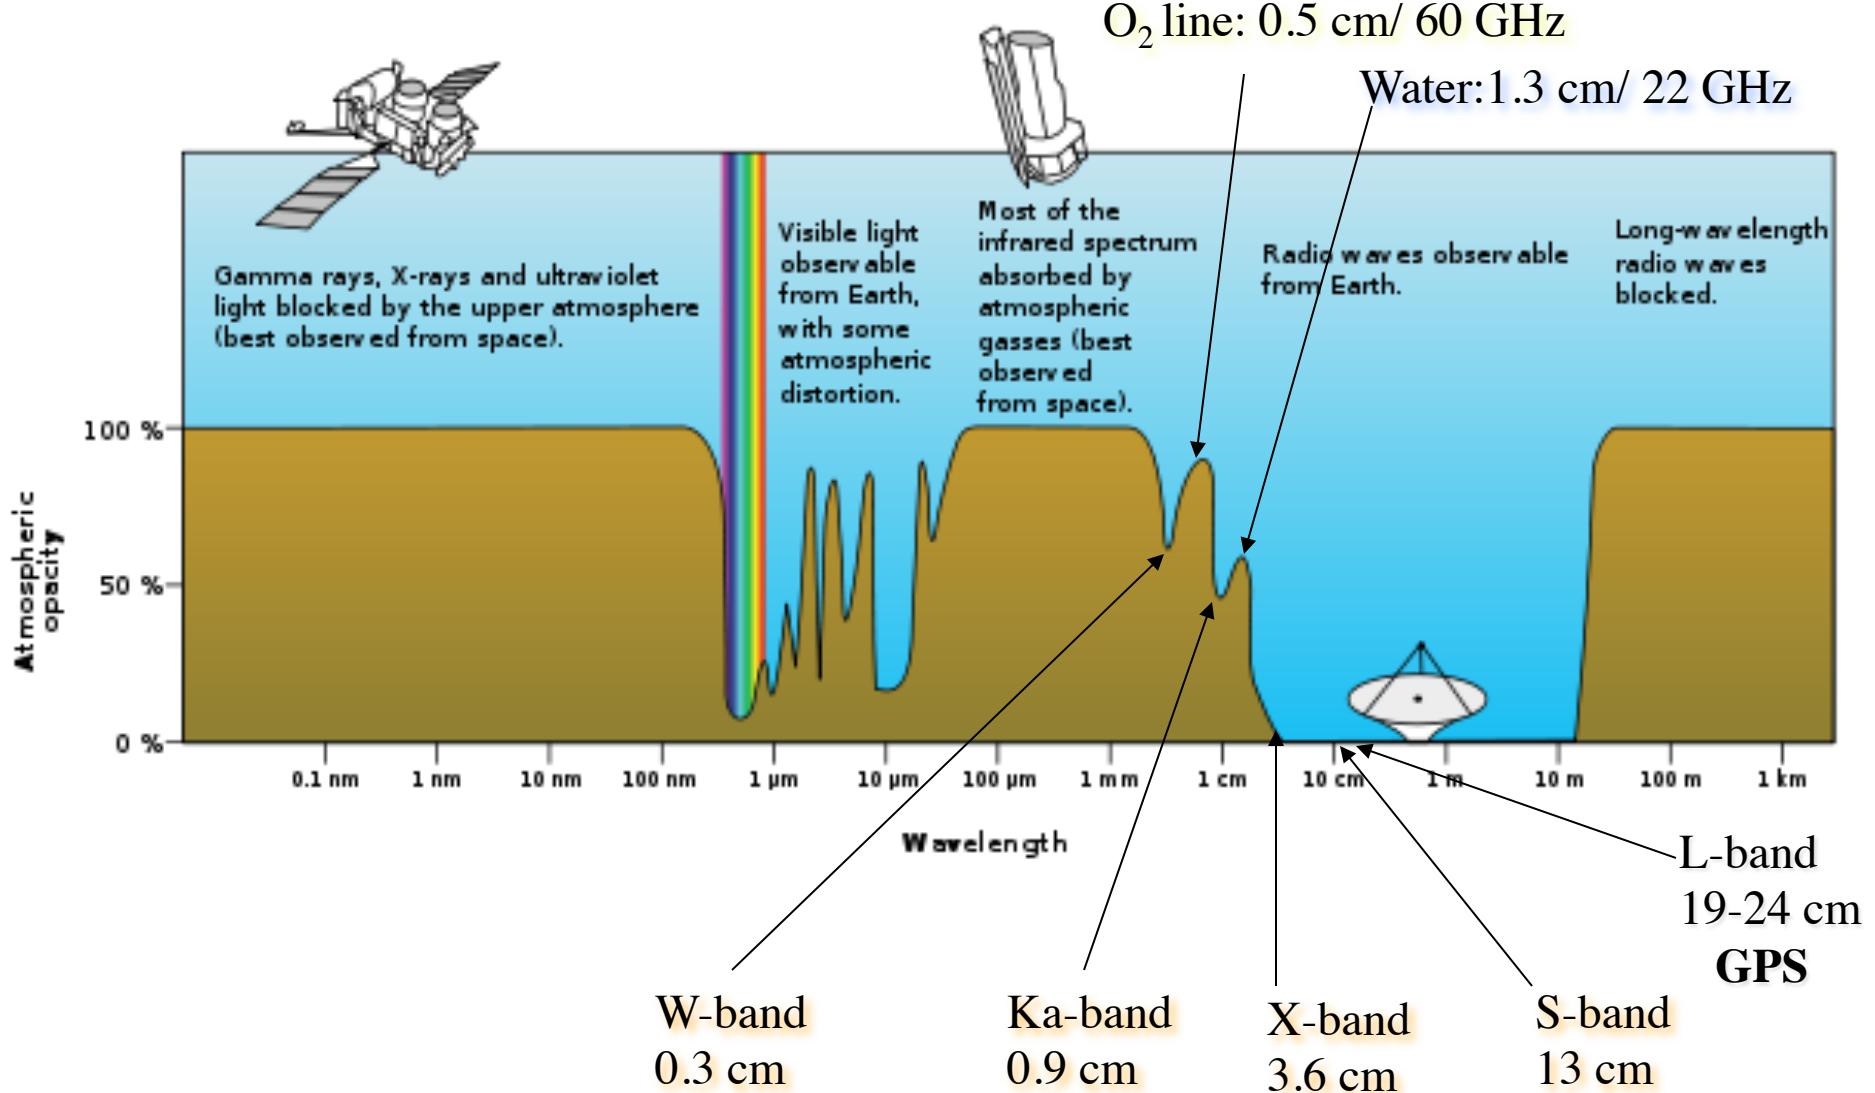




# AGN Centaurus-A in X-ray, Optical, Radio

JPL

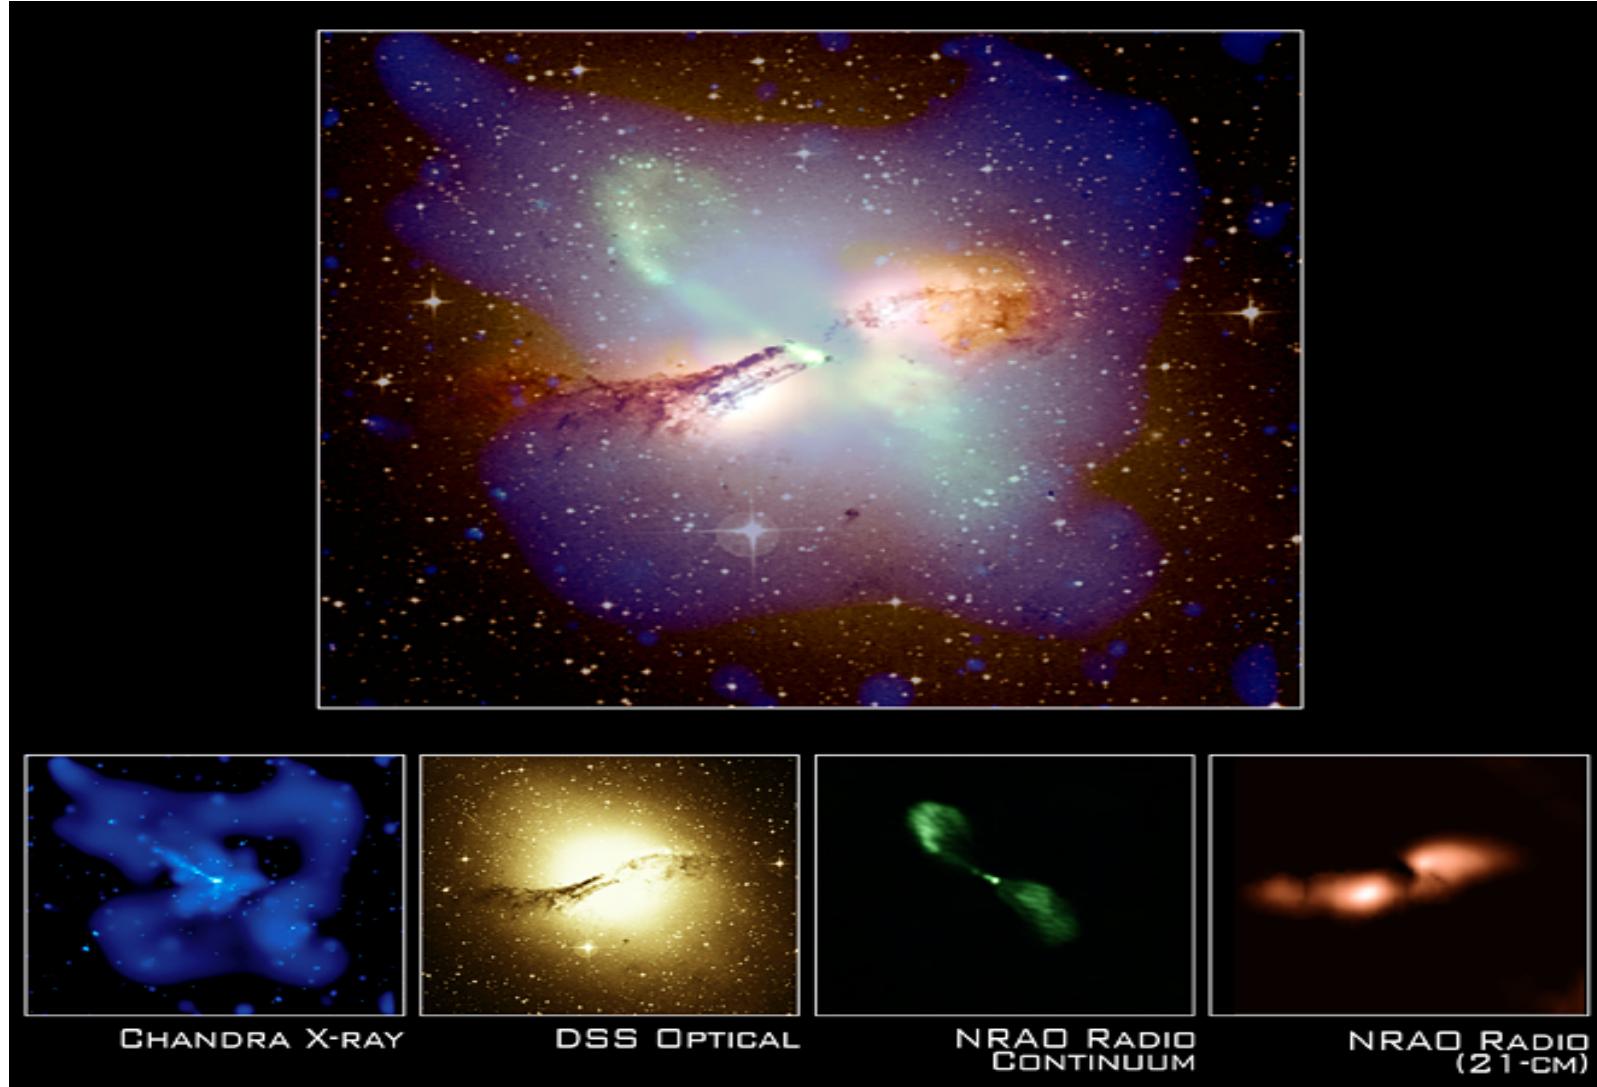

Credits: X-ray (NASA/CXC/M. Karovska et al.); Radio 21-cm image (NRAO/VLA/Schiminovich, et al.),  
Radio continuum image (NRAO/VLA/J. Condon et al.); Optical (Digitized Sky Survey U.K. Schmidt Image/STScI)

# Active Galactic Nuclei (AGN) schematic

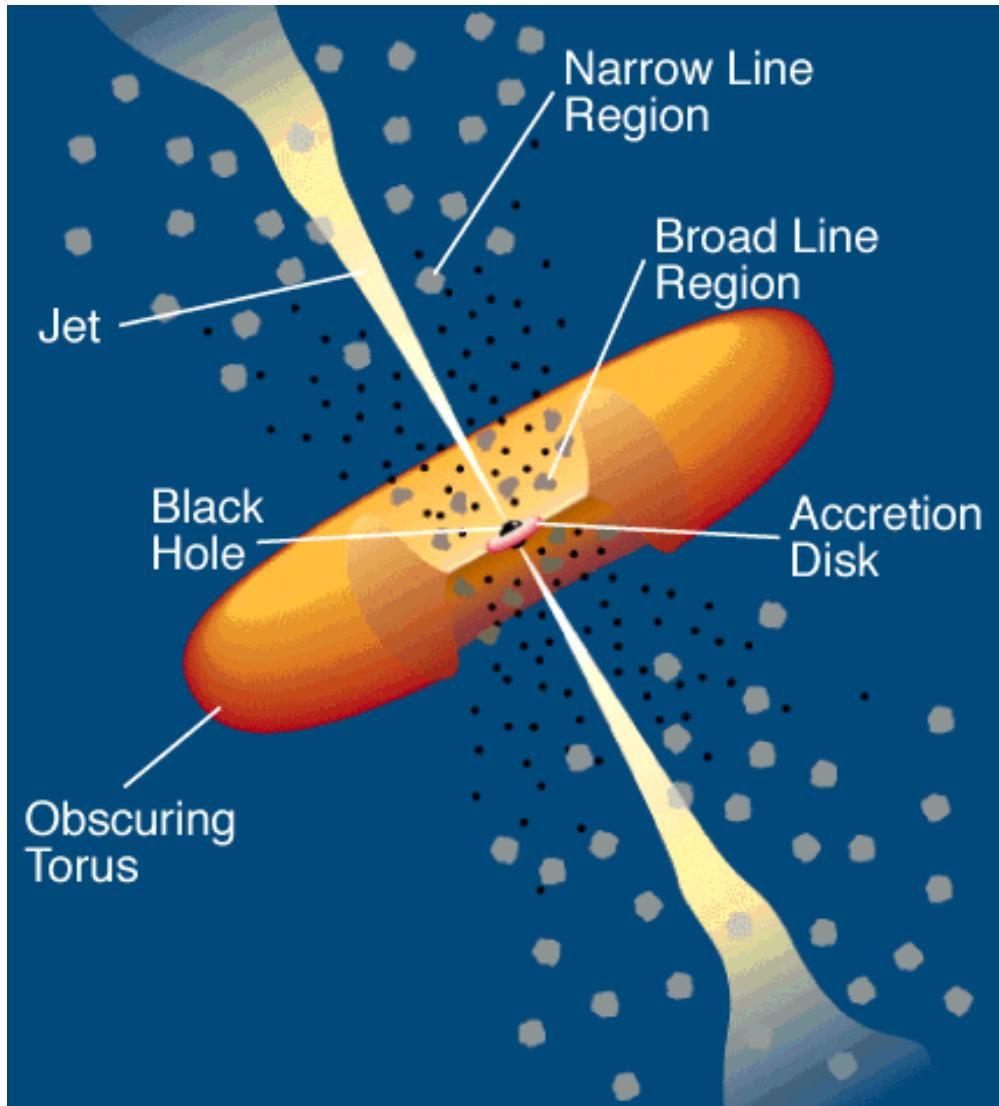

[http://heasarc.gsfc.nasa.gov/docs/objects/agn/agn\\_model.html](http://heasarc.gsfc.nasa.gov/docs/objects/agn/agn_model.html)

Credit: C.M. Urry and P. Padovani, 1995

Schematic of  
*Active Galactic Nuclei*  
Redshift  $z \sim 0.1$  to 5

Distance:  
billions light years  
Parallax = 0  
Proper motion  
 $< 0.1$  nrad/yr





Centroid of radiation  
Gets closer to central  
engine (black hole)  
As one goes to higher  
frequencies, therefore,

Ka-band (32 GHz)  
is better than  
X-band (8.4 GHz)



# Source Structure vs. Frequency

JPL

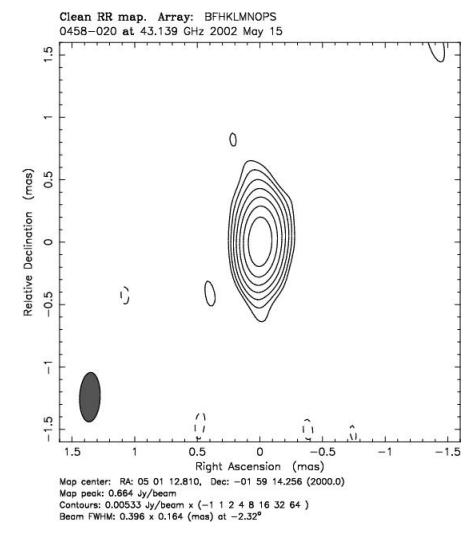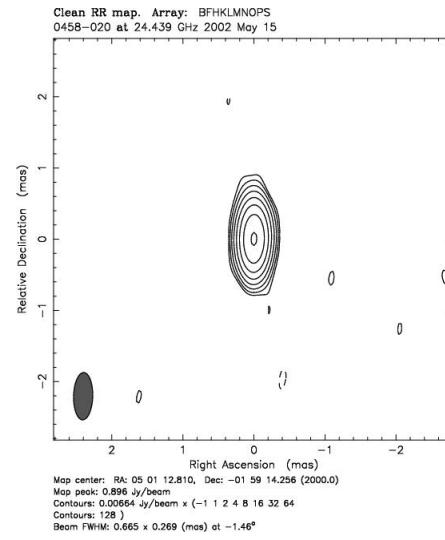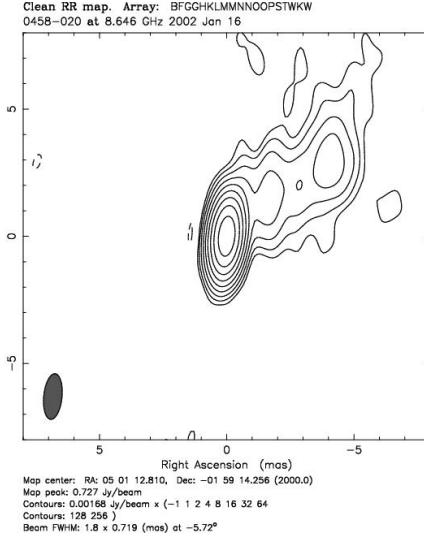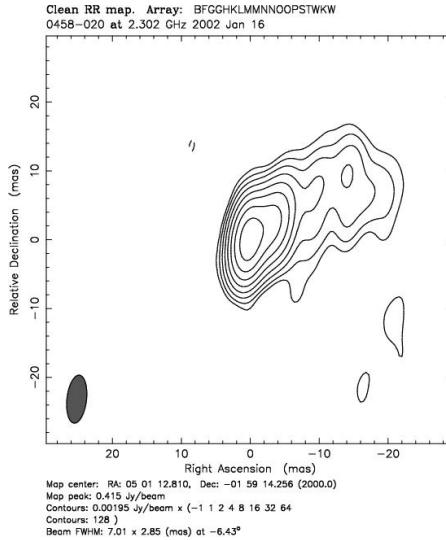

S-band  
2.3 GHz  
13.6cm

X-band  
8.6 GHz  
3.6cm


K-band  
24 GHz  
1.2cm

Q-band  
43 GHz  
0.7cm



Ka-band  
32 GHz  
0.9cm

The sources become better ----->

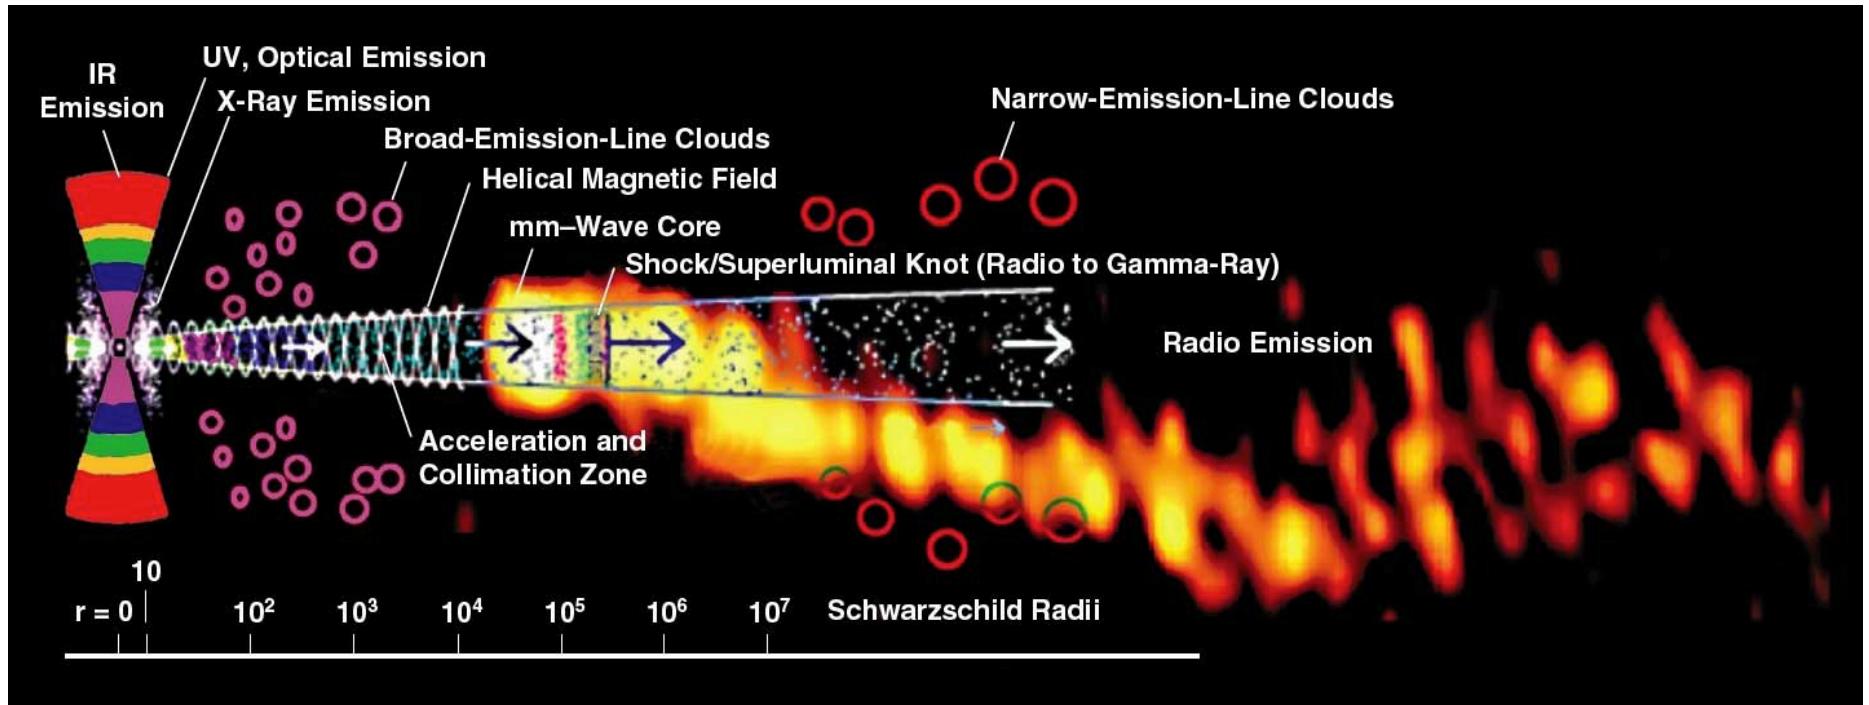

$R \sim 0.1\text{--}1 \mu\text{as}$

$1\text{mas}$

Features of AGN: *Note the Logarithmic length scale.*

“Shock waves are frequency stratified, with highest synchrotron frequencies emitted only close to the shock front where electrons are energized. The part of the jet interior to the mm-wave core is opaque at cm wavelengths. At this point, it is not clear whether substantial emission occurs between the base of the jet and the mm-wave core.”

Credit: Alan Marscher, ‘Relativistic Jets in Active Galactic Nuclei and their relationship to the Central Engine,’ Proc. of Science, VI Microquasar Workshop: Microquasars & Beyond, Societa del Casino, Como, Italy, 18–22 Sep 2006. Overlay (not to scale): 3 mm radio image of the blazar 3C454.3 (Krichbaum et al. 1999)



# Celestial Reference Frame: Long term stability

JPL

*GPS is not sufficient* for a long term inertial frame


Orientation: Relative to what?

One must define stable (ppb) reference directions

- GPS orbits are well modelled (ppb) over ~day time periods.

*But . . .*

- GPS constellation node drifts over weeks . . .

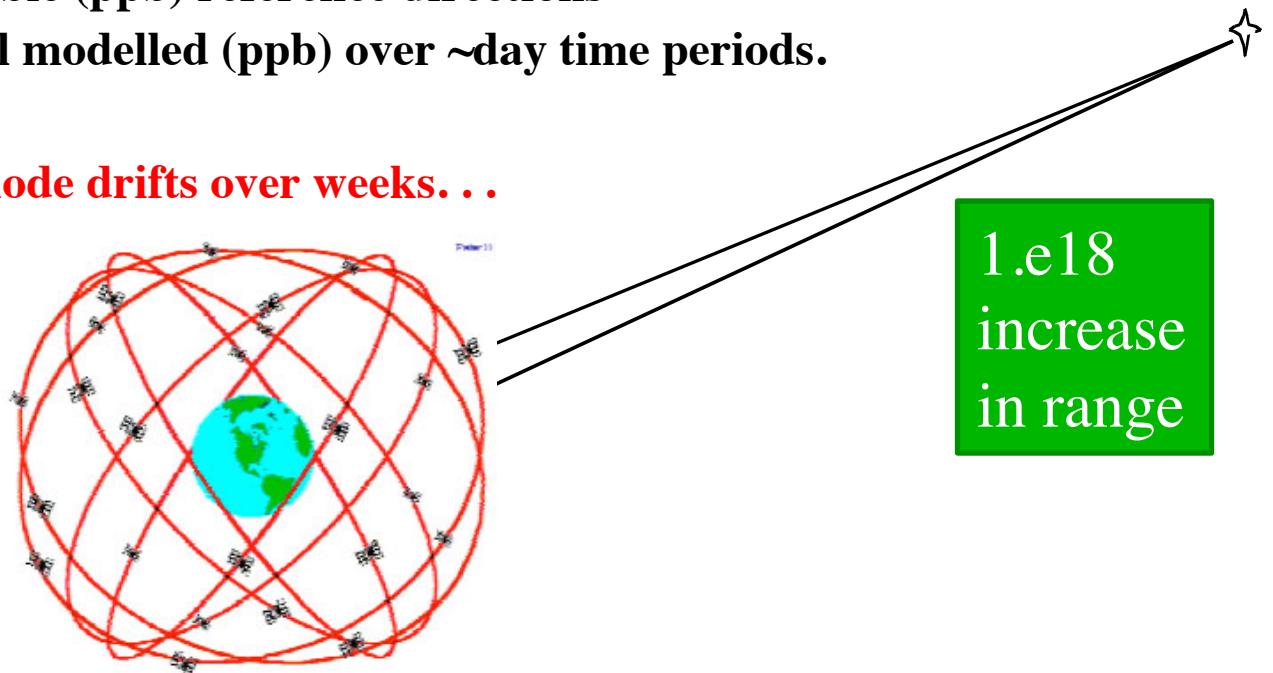

Solution: Change sources from range of  
GPS's nano-Light year to  
VLBI's Giga-Light Years  
~eighteen (18) orders of magnitude!


# Celestial Pole & Alignment of Axes

- VLBI determines angles *between* sources
- Absolute positions only weakly determined at 10-100 mas level by tidal effects (RA, dec of Sun & Moon) and atmospheric effects (elevation)
- Orientation of axes is defined at sub-mas level by convention
- Enforced by No-Net-Rotation constraint:

$$\sum_{i=1}^N \mathbf{s} \times \Delta \mathbf{s} = 0$$

where  $\mathbf{s}$  direction is source unit vector  
 cf. Jacobs et al, IVS, 2010.

<http://ivscc.gsfc.nasa.gov/publications/gm2010/jacobs2.pdf>

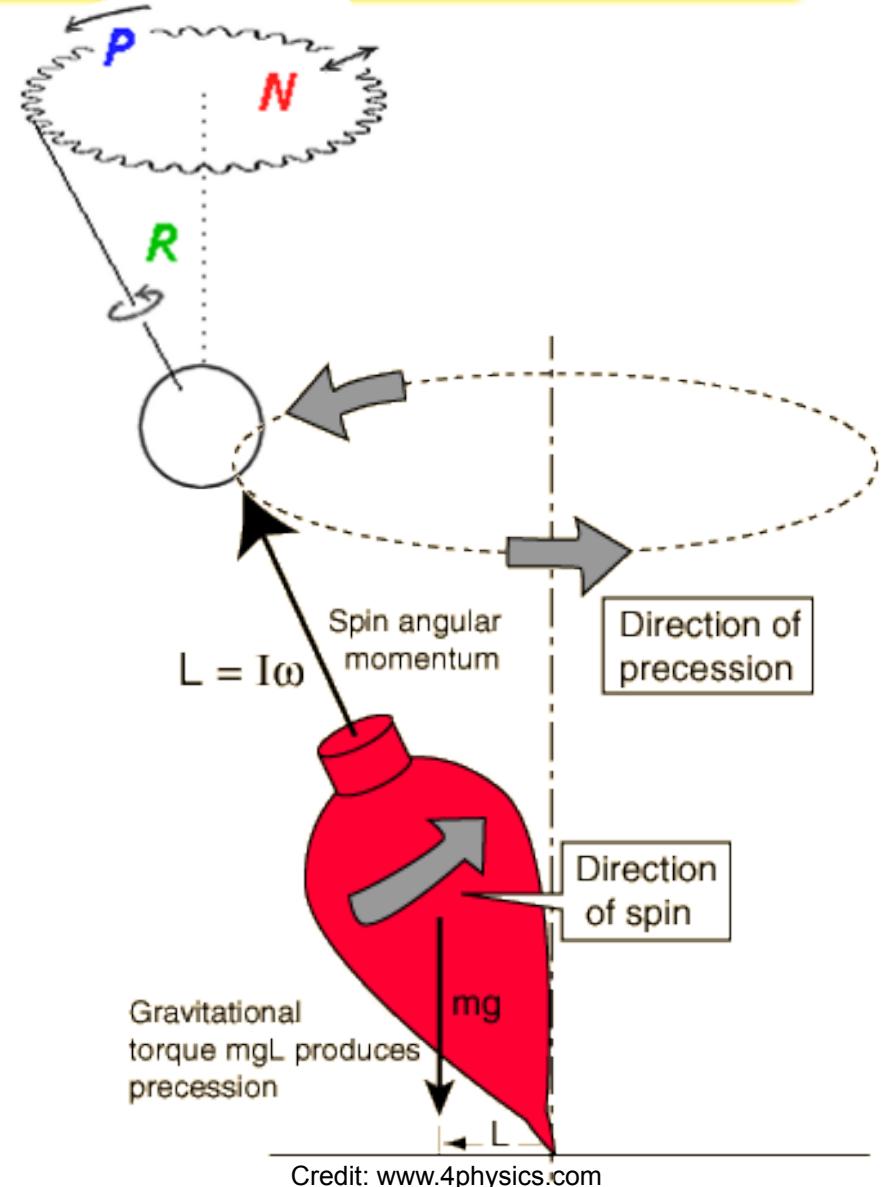

Credit: [www.4physics.com](http://www.4physics.com)



# Outline

JPL

## I. Concepts and Background:

- A. What is a Reference frame? Concepts, uses, desired properties
- B. Networks: The instruments used to build the frame
  - ad hoc, VLBA, EVN, Global, DSN, LBA, AuScope, etc.
- C. Brief history of Astrometry: The ‘fixed’ stars aren’t so fixed.
  - 1. Precession, proper motion, nutation, parallax
  - 2. Invention of radio astronomy. VLBI’s pursuit of (sub)milli-arsecond accuracy.

## II. Celestial Frames built using VLBI

- A. Surveys: Single dish, connected array: JVAS, AT20G, and VLBI: VCS, LCS**
- B. ICRF-1, ICRF-2: The IAU moves to from optical (stars) to radio (quasars)**
- C. Higher frequency radio frames: K&Q (24 & 43GHz), X/Ka (32 GHz)**

## III. The Path to the Future:

- A. Error Budgets: a tool for allocating resources for improvement
- B. Case study: Path to Improved X/Ka (8.4/32 GHz) Frame
- C. ICRF-3: the next standard radio frame
- D. Gaia: an optical frame with high accuracy



## II.B. The Transition from Optical to Radio

- Optical to Radio transition era documented in  
Hans Walter & Ojars Sovers, Astrometry of Fundamental Catalogues:  
The Evolution from Optical to Radio Reference Frames, 2000  
<http://adsabs.harvard.edu/abs/2000afce.conf....W>
- Fundamental Katalog FK5 (Fricke, 1988)  
<http://adsabs.harvard.edu/abs/1988VeARI..32....1F>  
1535 stars limited by proper motions of stars  
~150 mas regional differences from ICRF1 <http://adsabs.harvard.edu/abs/1997IAUJD...7E..24M>
- IAU called for a move to Active Galactic Nuclei (AGN)  
obtain very distant sources (redshift  $\sim 1$ ,  $\sim 5$  billion light years)  
No parallax, no proper motion
- IAU formed in 1990s a working group on  
International Celestial Reference Frame (ICRF)
- ICRF-1 adopted by the IAU as on 1998 Jan 01.  
Ma et al, AJ, 116, 516, 1998 <http://adsabs.harvard.edu/abs/1998AJ...116..516M>



## II.A. Surveys: How are sources found? Positions? **JPL**

1. **Single dish surveys:** A single radio telescope sweeps the sky to search for point-like sources. Example: Parkes-MIT-NRAO 4.8 GHz (Griffith & Wright, 1993)  
~10 arcsec positions.

<http://www.parkes.atnf.csiro.au/observing/databases/pmn/pmpubs.html> 1993AJ....105.1666G

2. **Connected element array surveys:**

- next step is interferometric connected arrays such as the Very Large Array or ATCA
- Positions improved to 10s of milli-arcsec

- North: Jodrell Bank VLA Survey (JVAS) (Patnaik et al, MNRAS, 1992)

<http://adsabs.harvard.edu/abs/1992MNRAS.254..655P>



<http://www.vla.nrao.edu/>

- South: ATCA 20-GHz (AT20G), 5890 sources, Southern hemisphere (Murphy et al, MNRAS, 2010)


<http://www.atnf.csiro.au/research/AT20G> <http://adsabs.harvard.edu/abs/2010MNRAS.402.2403M>

3. **Final Survey stage:** VLBI gets ~milli-arcsec positions e.g

- North: VLBA Calibrator Survey (Beasley et al, ApJS, 2002)  
<http://adsabs.harvard.edu/abs/2002ApJS..141...13B>

- South: LBA Calibrator Survey, (Petrov et al, MNRAS, 2011)

<http://arxiv.org/abs/1012.2607> <http://adsabs.harvard.edu/abs/2011MNRAS.414.2528P>

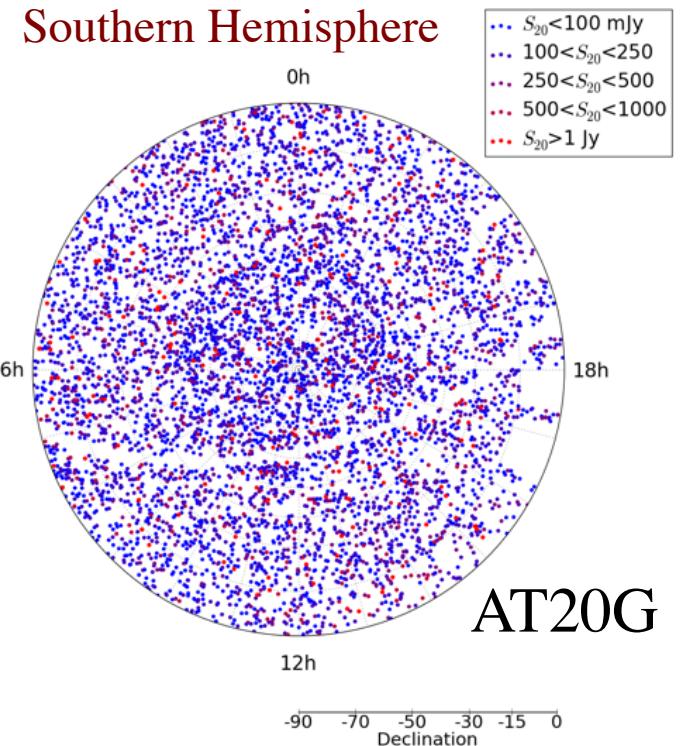

ATCA  
Narrabri, Australia

<http://www.narrabri.atnf.csiro.au/public/>

## II.A. Surveys: milli-arcsec VLBI surveys

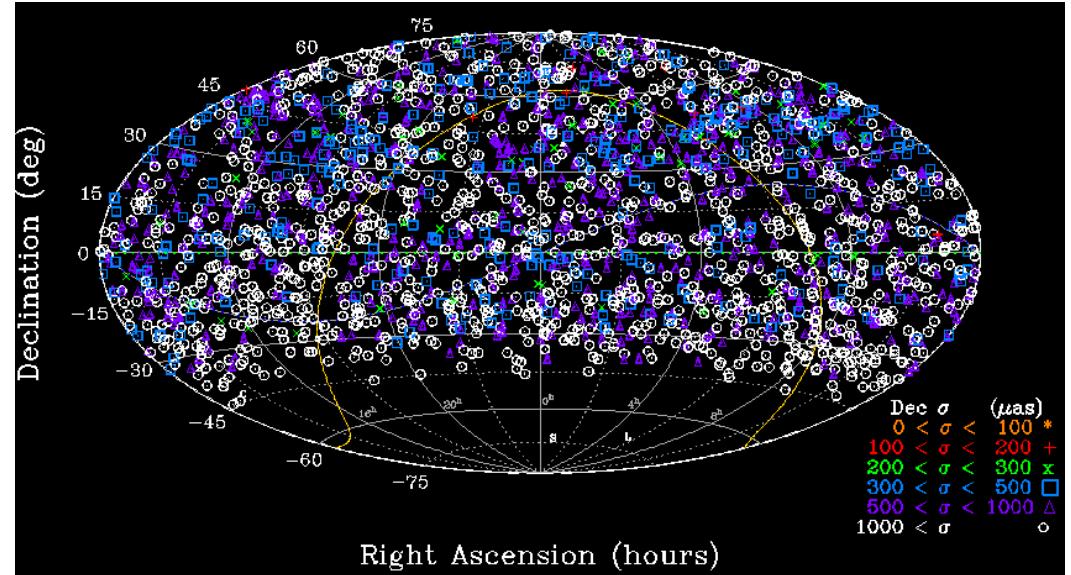
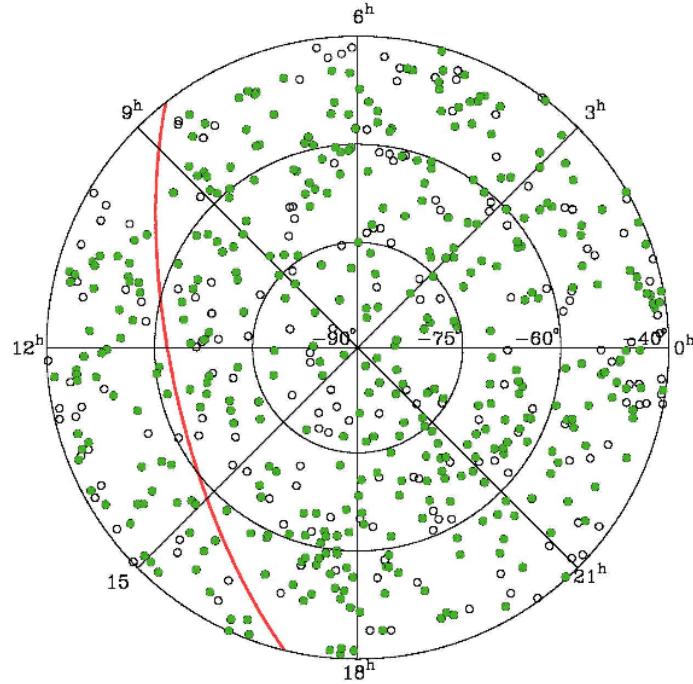


Figure credit: C.S. Jacobs

South:


LBA Cal Survey1:  
 ~1 mas accuracy  
 view from south pole  
<http://arxiv.org/pdf/1012.2607v2.pdf>

North:

VLBA Calibrator Survey  
 ~2200 sources, ~1 mas  
 Hammer-Aitoff Projection  
<http://adsabs.harvard.edu/abs/2002ApJS..141...13B>


- ICRF-1 adopted by the IAU as on 1998 Jan 01.

Ma et al, AJ, 116, 516, 1998 <http://adsabs.harvard.edu/abs/1998AJ....116..516M>

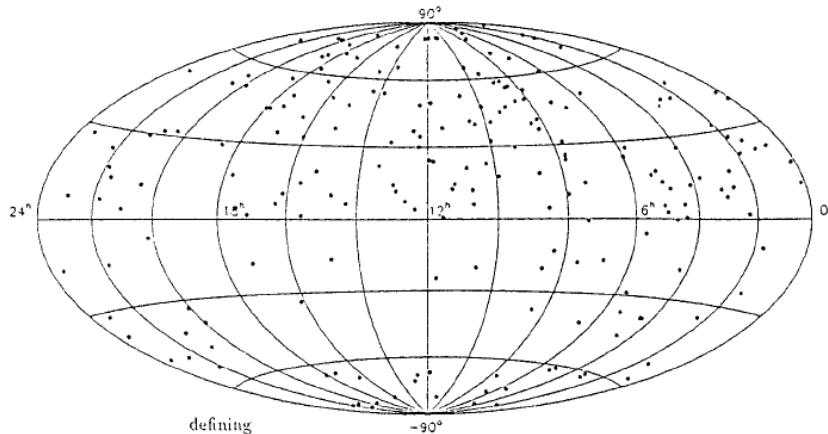

212 “Defining” sources  
which define the orientation  
of the frame’s axes.

**Weak in the south.**

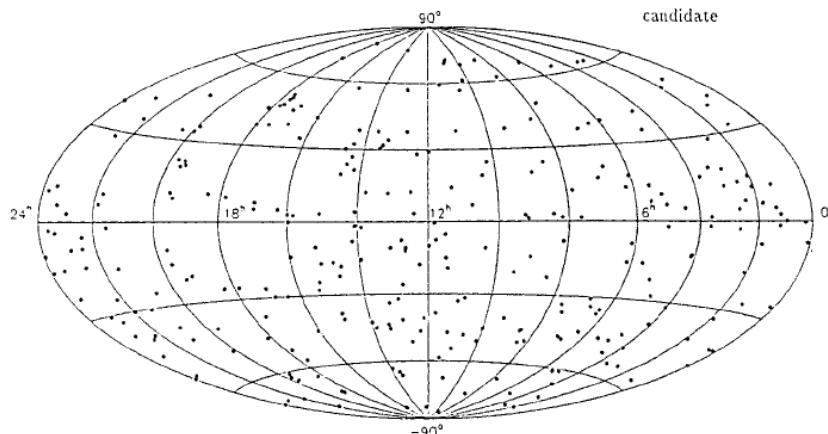


“Candidate” sources (left)  
Plus a few “other” sources  
For a total of 608 sources.




# Current Status of Celestial Reference Frames at radio wavelengths:

**S/X ICRF2:** 3.6cm, 8 GHz  
**K-band:** 1.2cm, 24 GHz  
**X/Ka-band:** 9mm, 32 GHz

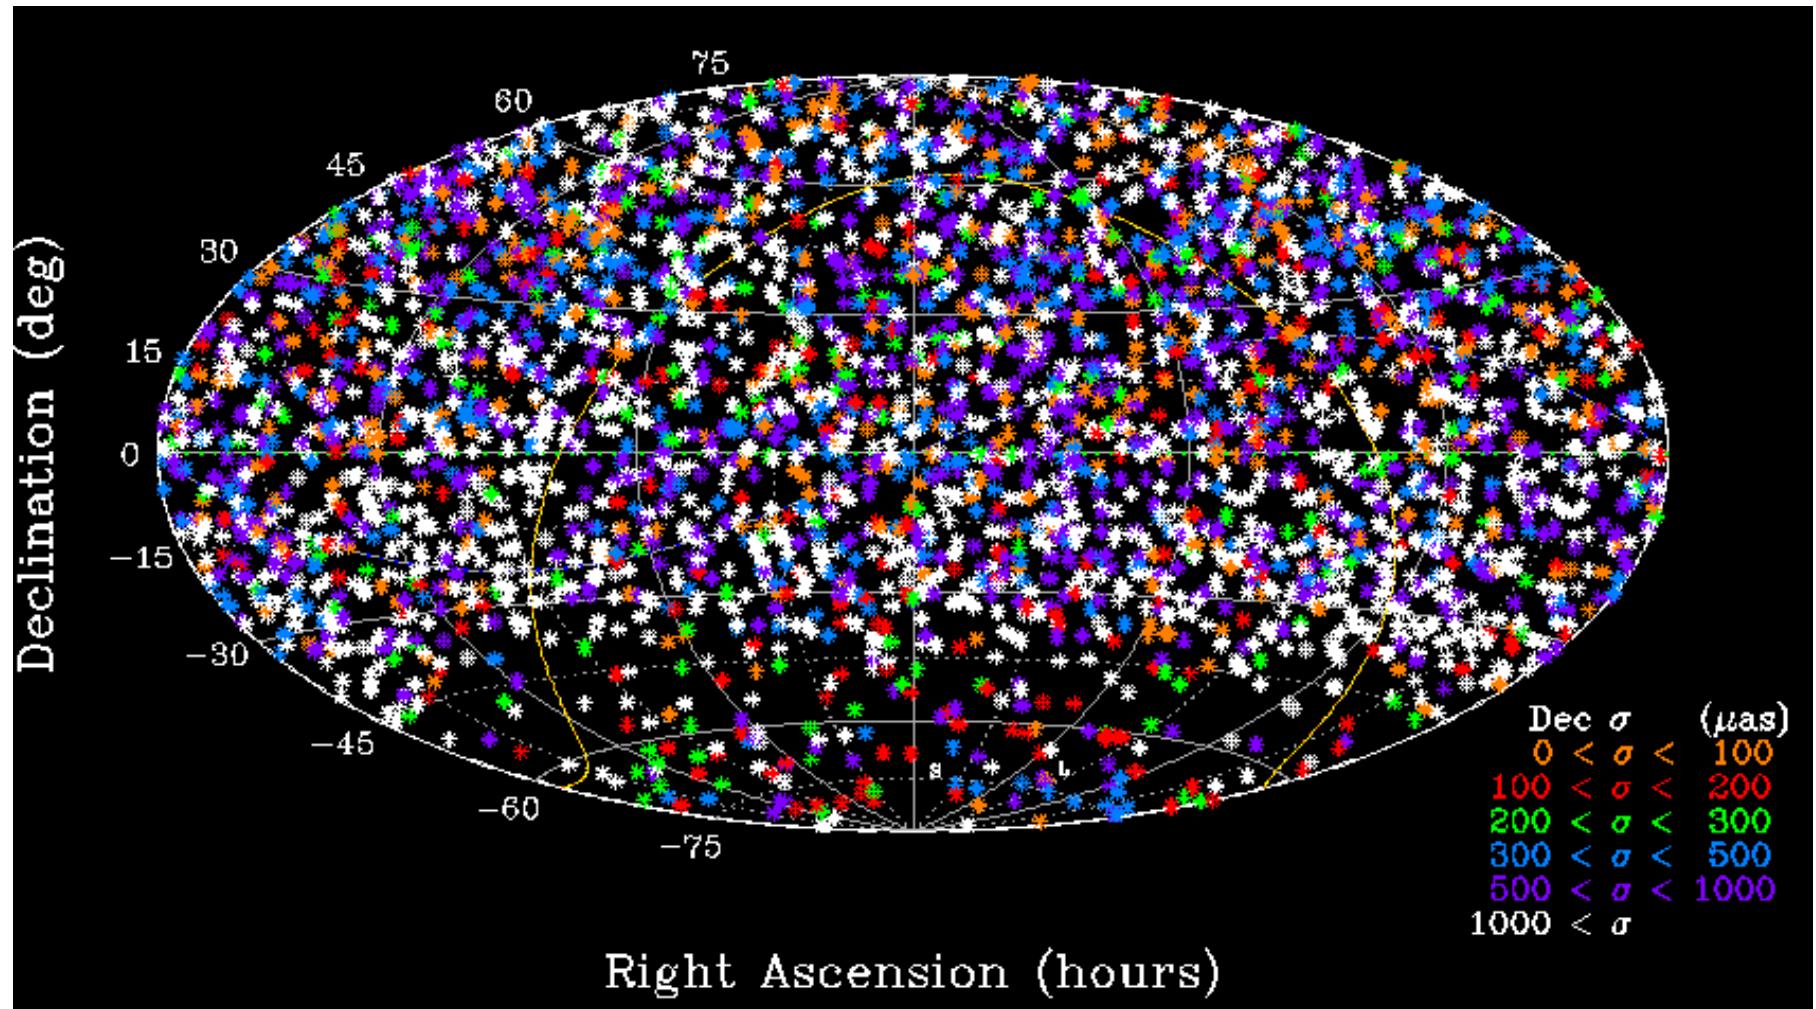


40  $\mu$ as floor. ~1200 obj. well observed, ~2000 survey session only

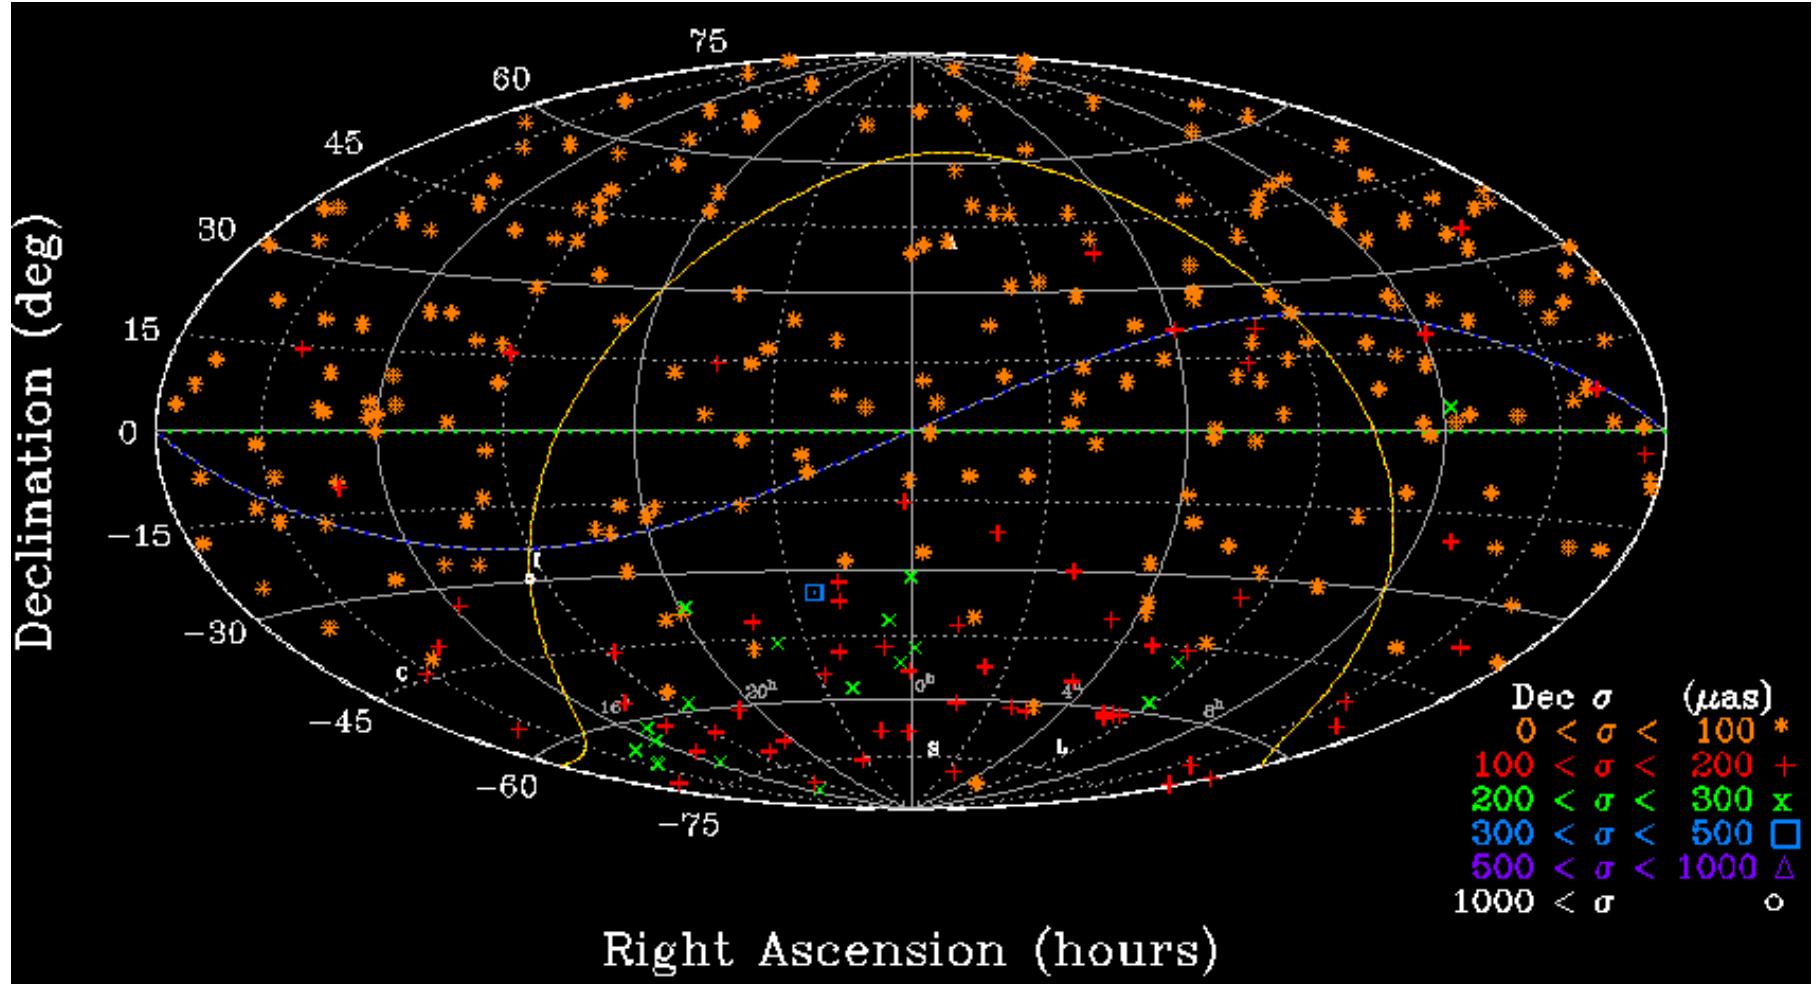

295 “best” sources Define the orientation of the axes. **Weak in the South**

# K-band 1.2cm: 278 Sources

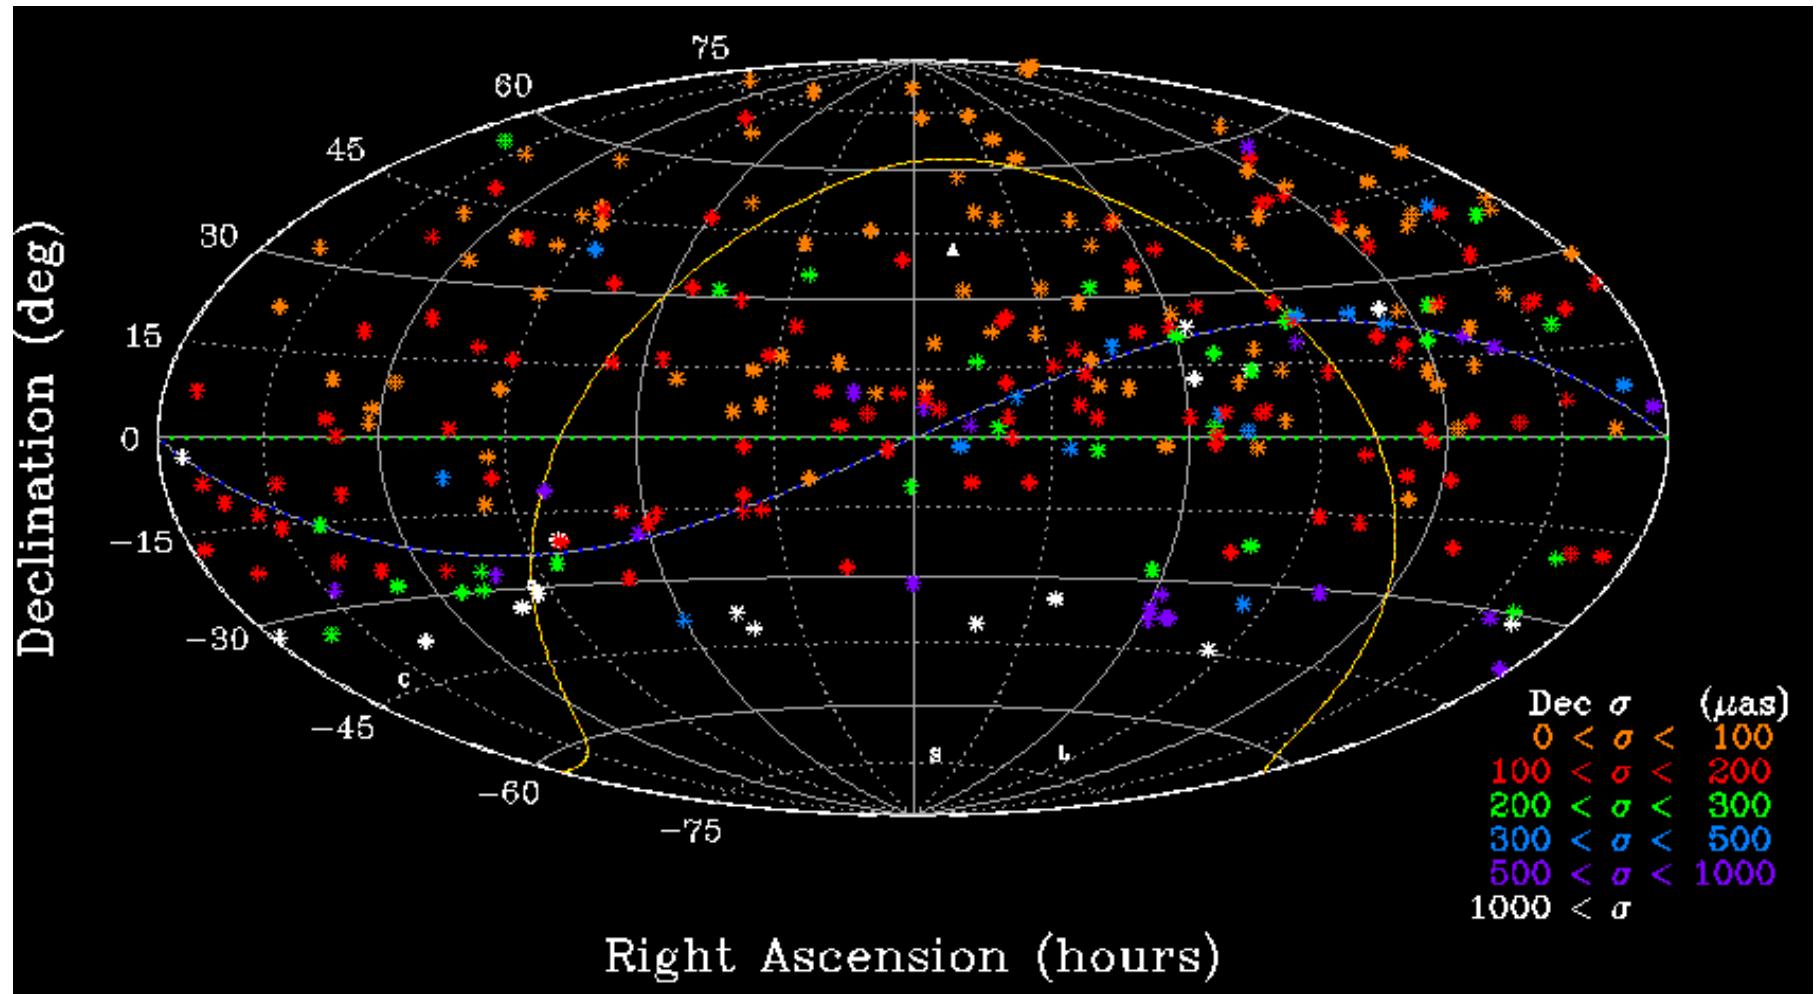

VLBA all northern, poor below Dec.  $-30^\circ$ .  $\Delta\text{Dec}$  vs. Dec tilt =  $500 \mu\text{as}$

Credit: Lanyi et al, AJ, 139, 5, 2010; Charlot et al, AJ, 139, 5, 2010




# K-band 1.2cm vs. ICRF2 at 3.6cm (S/X)

JPL

Lack of direct  
Dual-band ion  
Calibrations  
*and*  
Lack of any  
Station in south

Leads to poor  
 $\Delta$ Dec vs. Dec  
Zonal stability:  
500  $\mu$ as tilt

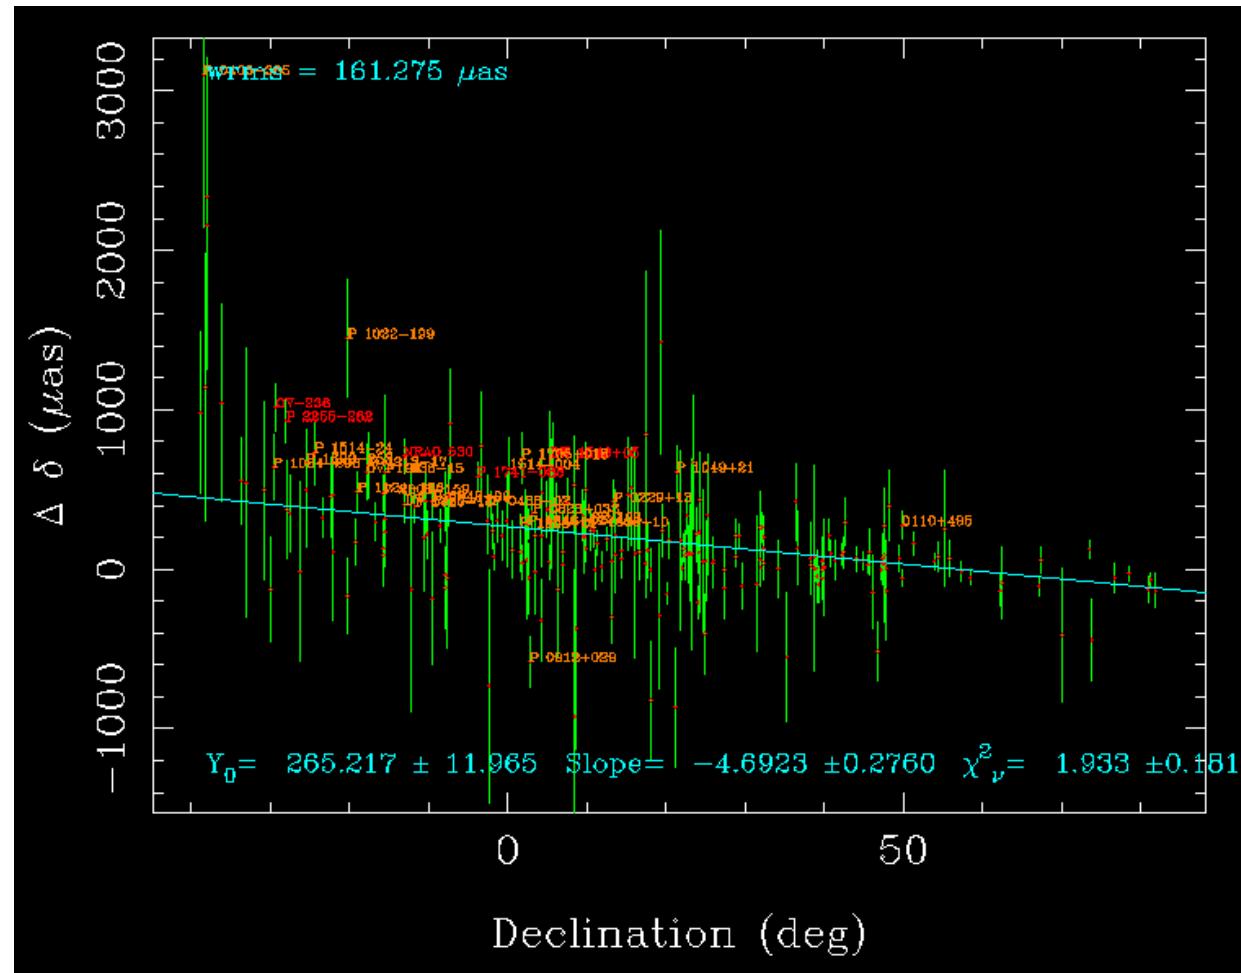


## K(1.2cm) Declinations vs. S/X ICRF2 (current IAU standard)

Credit: K(1.2cm): Lanyi et al, AJ, 139, 5, 2010


S/X ICRF2: Ma et al, editors: Fey, Gordon & Jacobs, IERS, Germany, 2009

# X/Ka RA results: 482 Sources

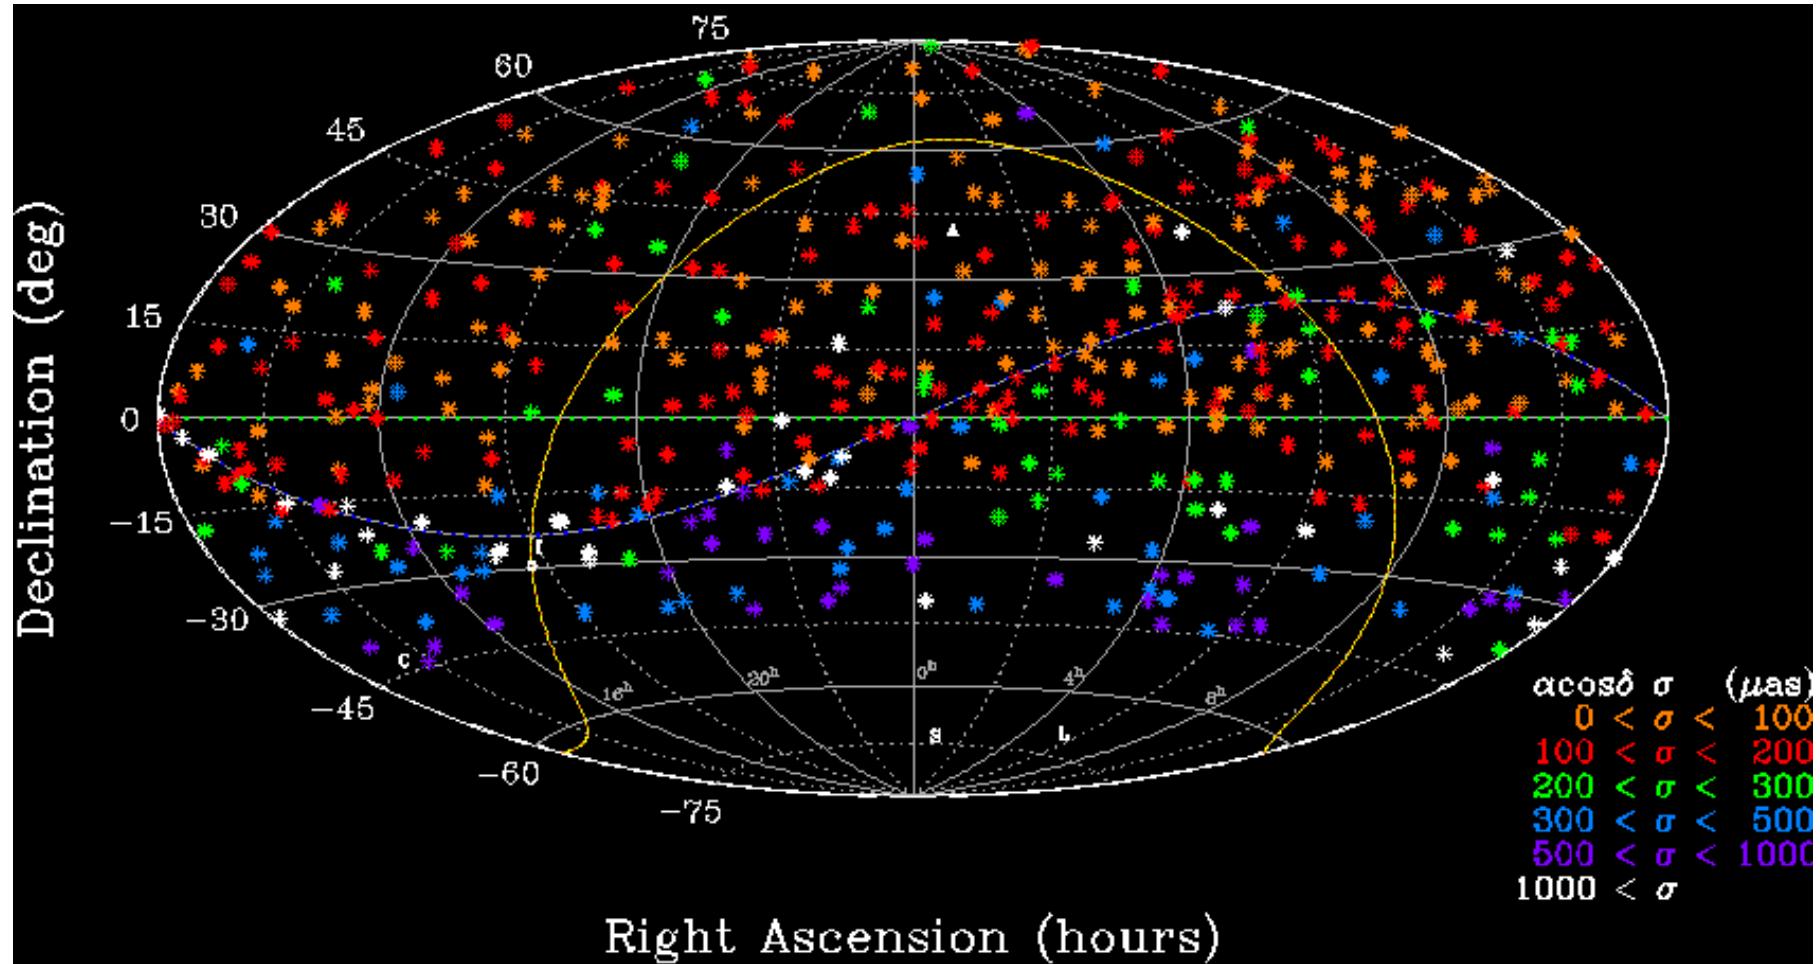

Cal. to Madrid, Cal. to Australia. Weakens south of Dec = -15deg

# X/Ka Dec results: 482 Sources

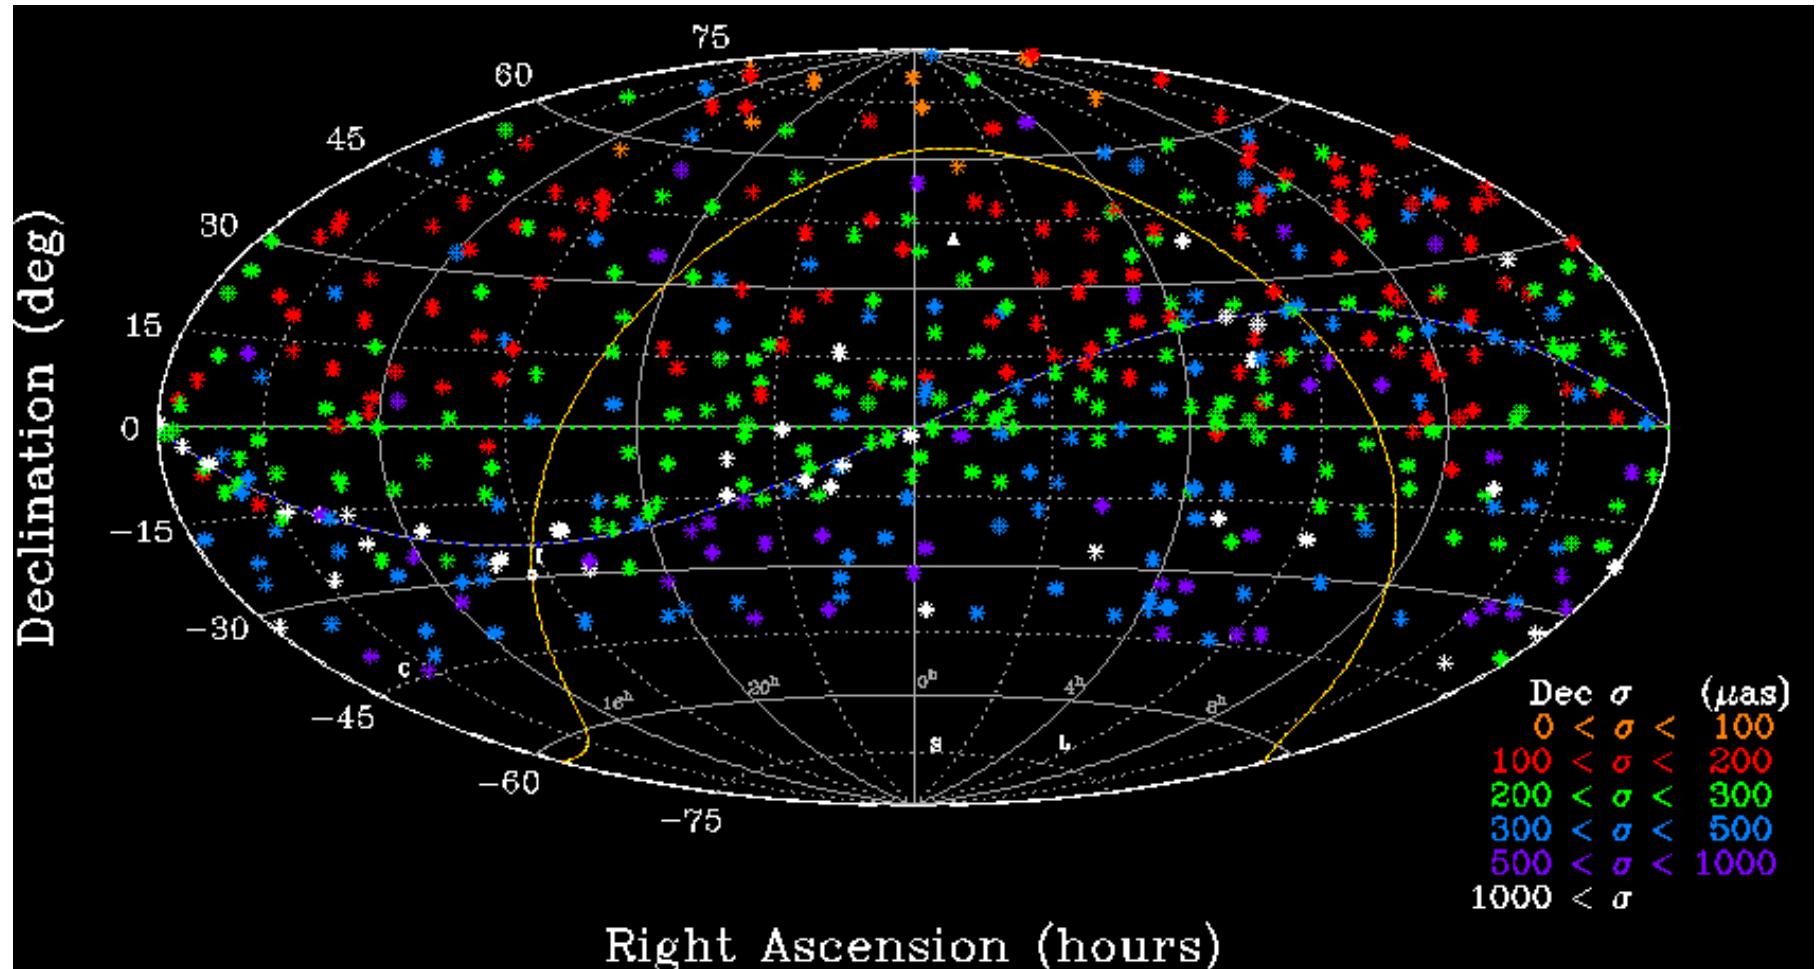

Cal. to Madrid, Cal. to Australia. Weakens southward. No  $\Delta$ Dec tilt




# 9mm (X/Ka) vs. ICRF2 at 3.6cm (S/X)

JPL

Dual-band ion  
Calibrations  
*and*  
Station in south

Leads to better  
 $\Delta$ Dec vs. Dec  
Zonal stability:

$108 \pm 90 \mu\text{as}$  tilt

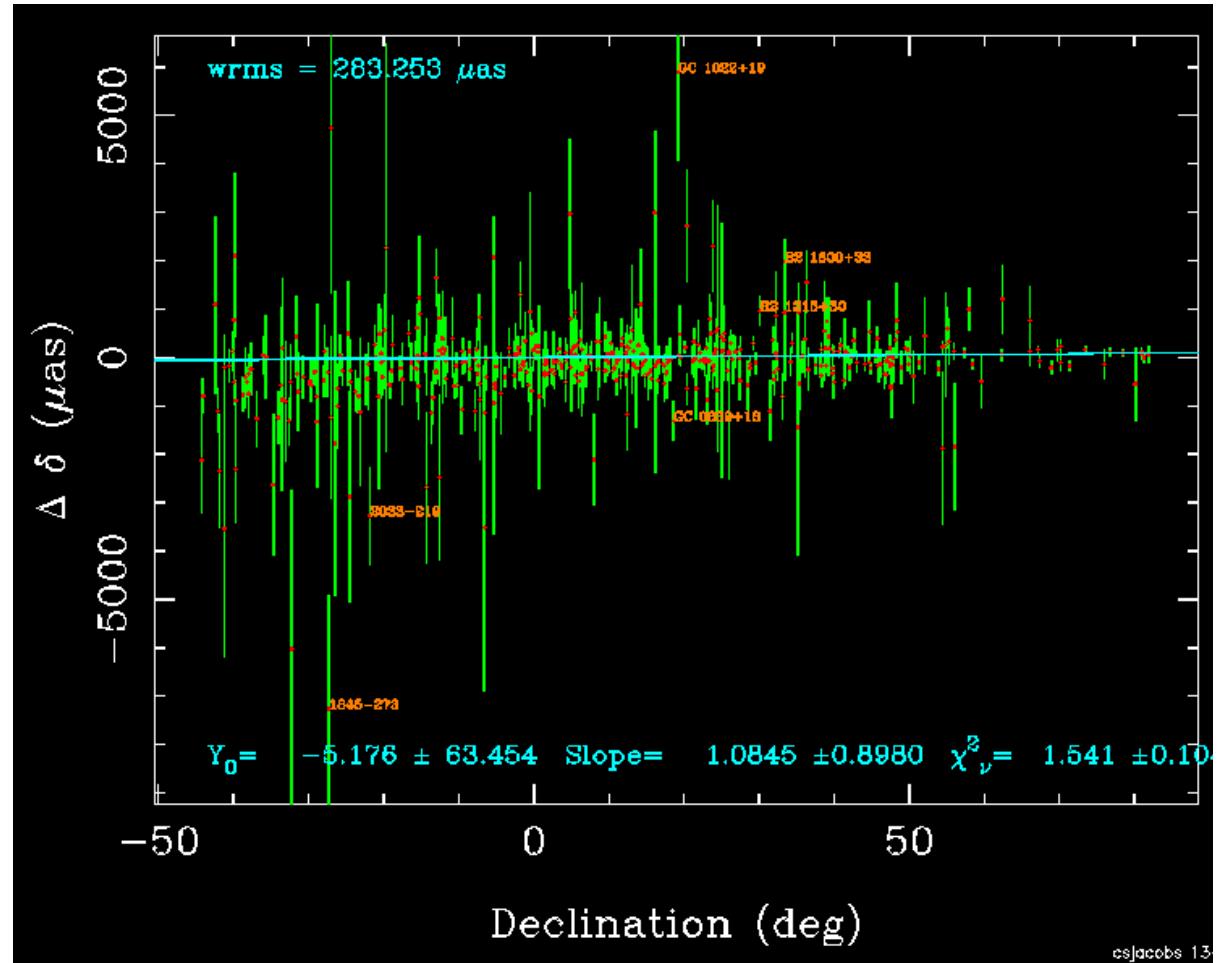

**X/Ka(9mm) Dec. vs. S/X ICRF2 (current IAU standard)**


S/X ICRF2: Ma et al, editors: Fey, Gordon & Jacobs, IERS, Germany, 2009



# Planetary Ephemeris to ICRF Frame Tie


JPL

- $\Delta$ VLBI measurements of spacecraft around a planet obtains position in the ICRF frame
- Doppler and range measures spacecraft in planet center Frame.

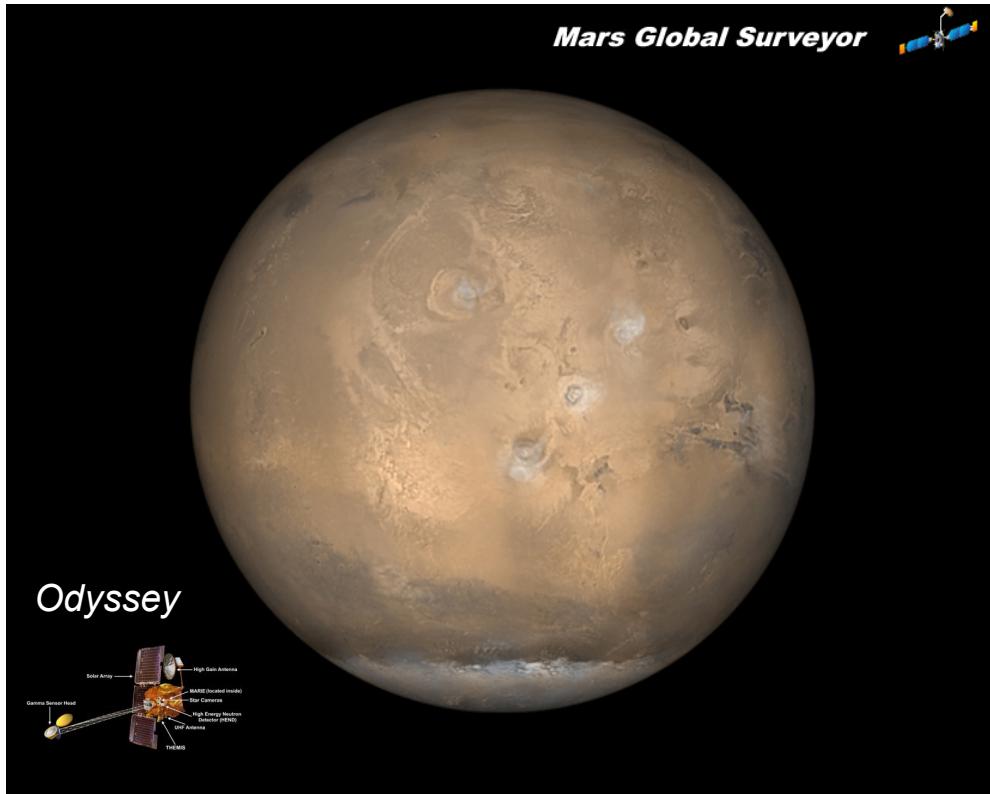

C.S. Jacobs 5 Mar 2013

Credit: NASA, JPL/Caltech: [www.jpl.nasa.gov](http://www.jpl.nasa.gov)

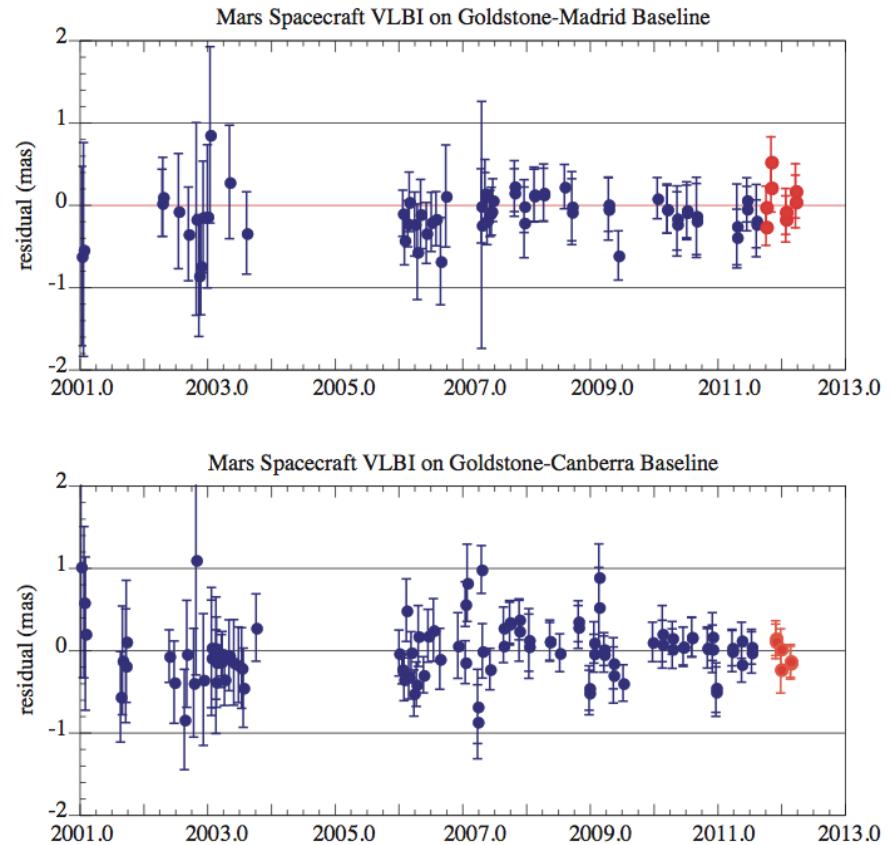

Folkner et al, IAU. 2012  
200  $\mu$ as (1. nrad) residuals

<http://referencesystems.info/uploads/3/0/3/0/3030024/folkner.pdf>  
<http://adsabs.harvard.edu/abs/2012IAUJD...7E..36F>



# Overview

JPL

## I. Concepts and Background:

- A. What is a Reference frame? Concepts, uses, desired properties
- B. Networks: The instruments used to build the frame
  - ad hoc, VLBA, EVN, Global, DSN, LBA, AuScope, etc.
- C. Brief history of Astrometry: The ‘fixed’ stars aren’t so fixed.
  - 1. Precession, proper motion, nutation, parallax
  - 2. Invention of radio astronomy. VLBI’s pursuit of (sub)milli-arsecond accuracy.

## II. Celestial Frames built using VLBI

- A. Surveys: Single dish, connected array: JVAS, AT20G, and VLBI: VCS, LCS
- B. ICRF-1, ICRF-2: The IAU moves to from optical (stars) to radio (quasars)
- C. Higher frequency radio frames: K&Q (24 & 43GHz), X/Ka (32 GHz)


## III. The Path to the Future:

- A. Error Budgets: a tool for allocating resources for improvement**
- B. Case study: Path to Improved X/Ka (8.4/32 GHz) Frame**
- C. ICRF-3: the next standard radio frame**
- D. Gaia: an optical frame with high accuracy**




# Error Budget for Reference Frame VLBI

*The Tall Tent Poles*

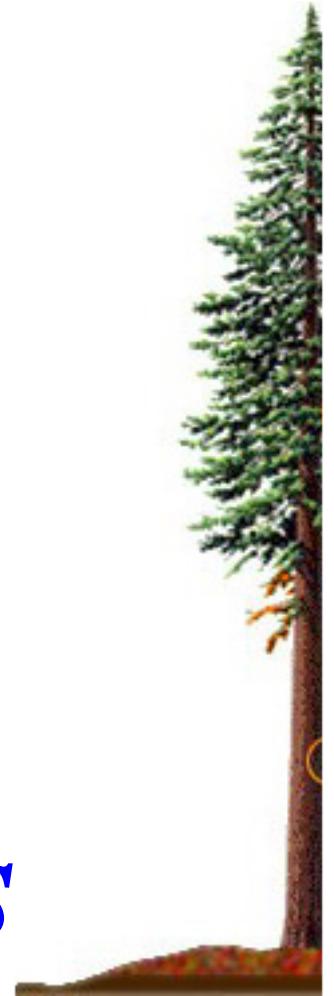

# $\Delta$ VLBI Error Budget

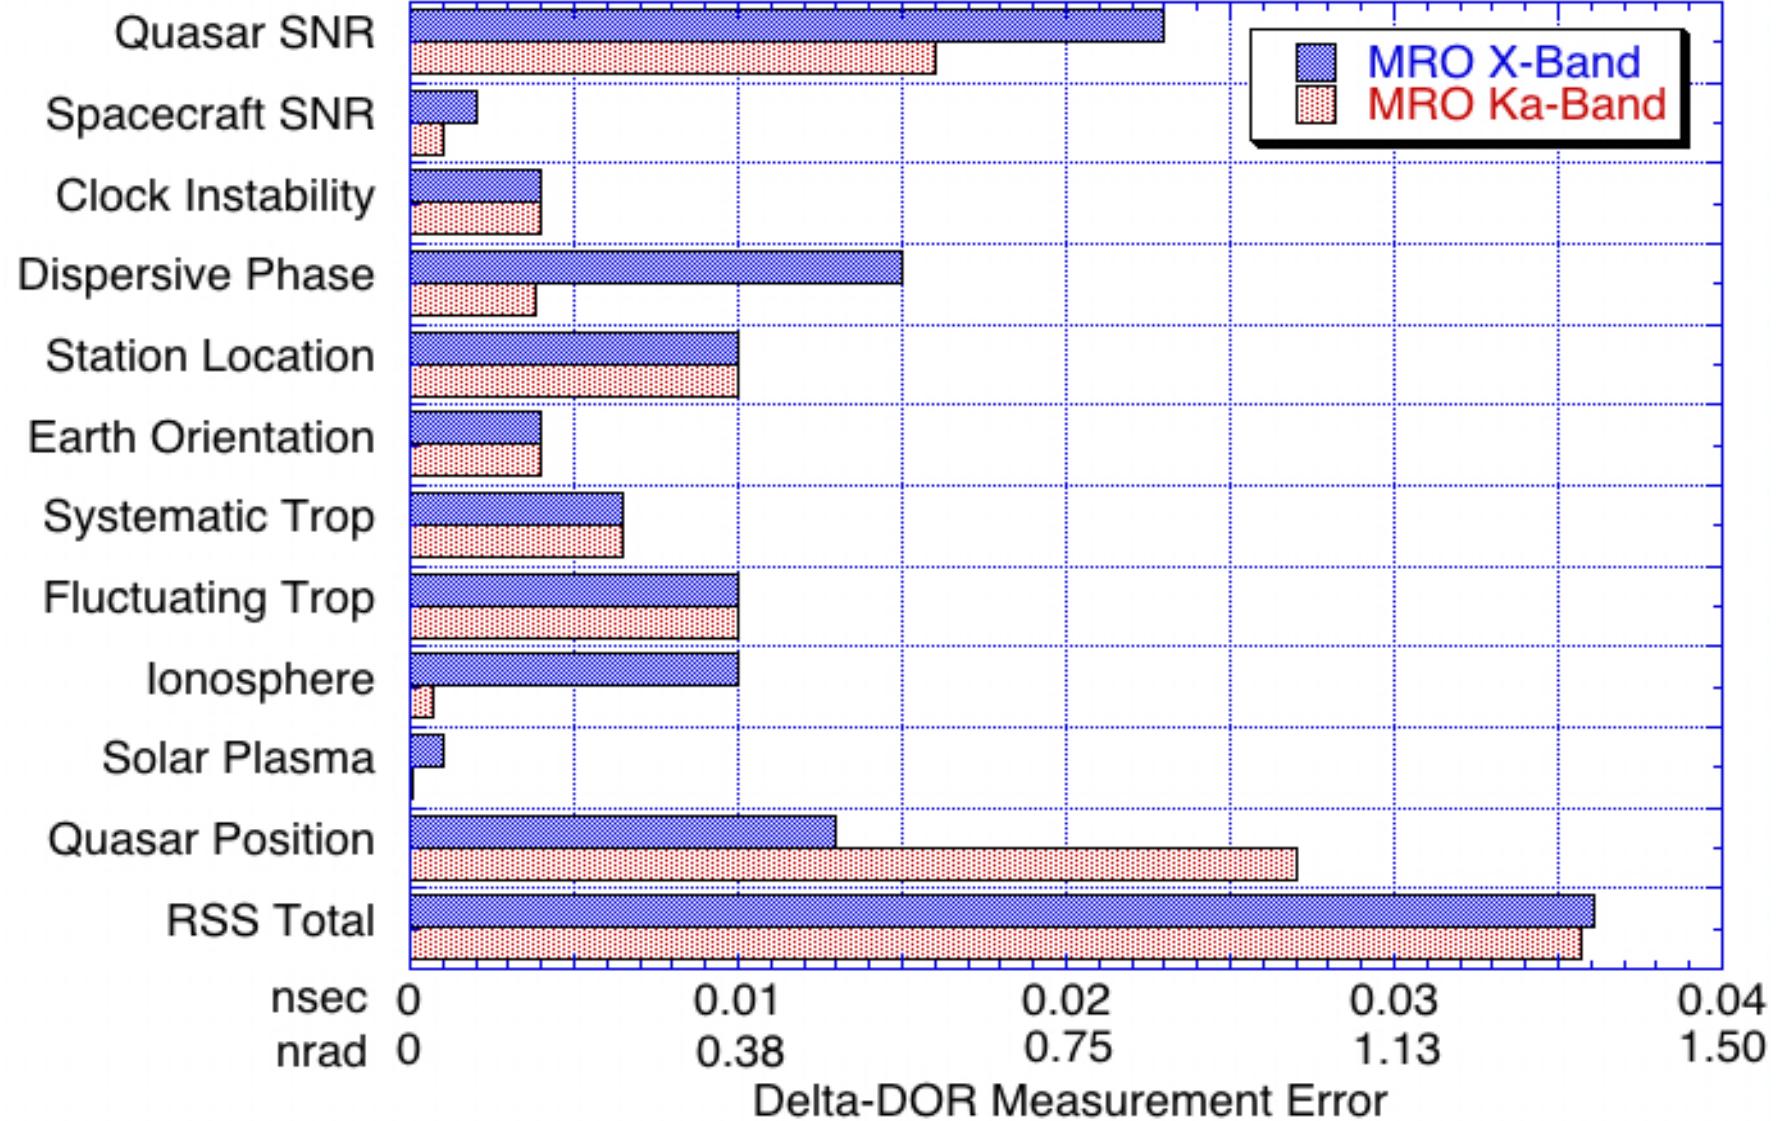



# Overview

JPL

## I. Concepts and Background:

- A. What is a Reference frame? Concepts, uses, desired properties
- B. Networks: The instruments used to build the frame
  - ad hoc, VLBA, EVN, Global, DSN, LBA, AuScope, etc.
- C. Brief history of Astrometry: The ‘fixed’ stars aren’t so fixed.
  - 1. Precession, proper motion, nutation, parallax
  - 2. Invention of radio astronomy. VLBI’s pursuit of (sub)milli-arsecond accuracy.


## II. Celestial Frames built using VLBI

- A. Surveys: Single dish, connected array: JVAS, AT20G, and VLBI: VCS, LCS
- B. ICRF-1, ICRF-2: The IAU moves to from optical (stars) to radio (quasars)
- C. Higher frequency radio frames: K&Q (24 & 43GHz), X/Ka (32 GHz)

## III. The Path to the Future:

- A. Error Budgets: a tool for allocating resources for improvement**
- B. Case study: Path to Improved X/Ka (8.4/32 GHz) Frame**
- C. ICRF-3: the next standard radio frame**
- D. Gaia: an optical frame with high accuracy**

# X/Ka RA results: 482 Sources

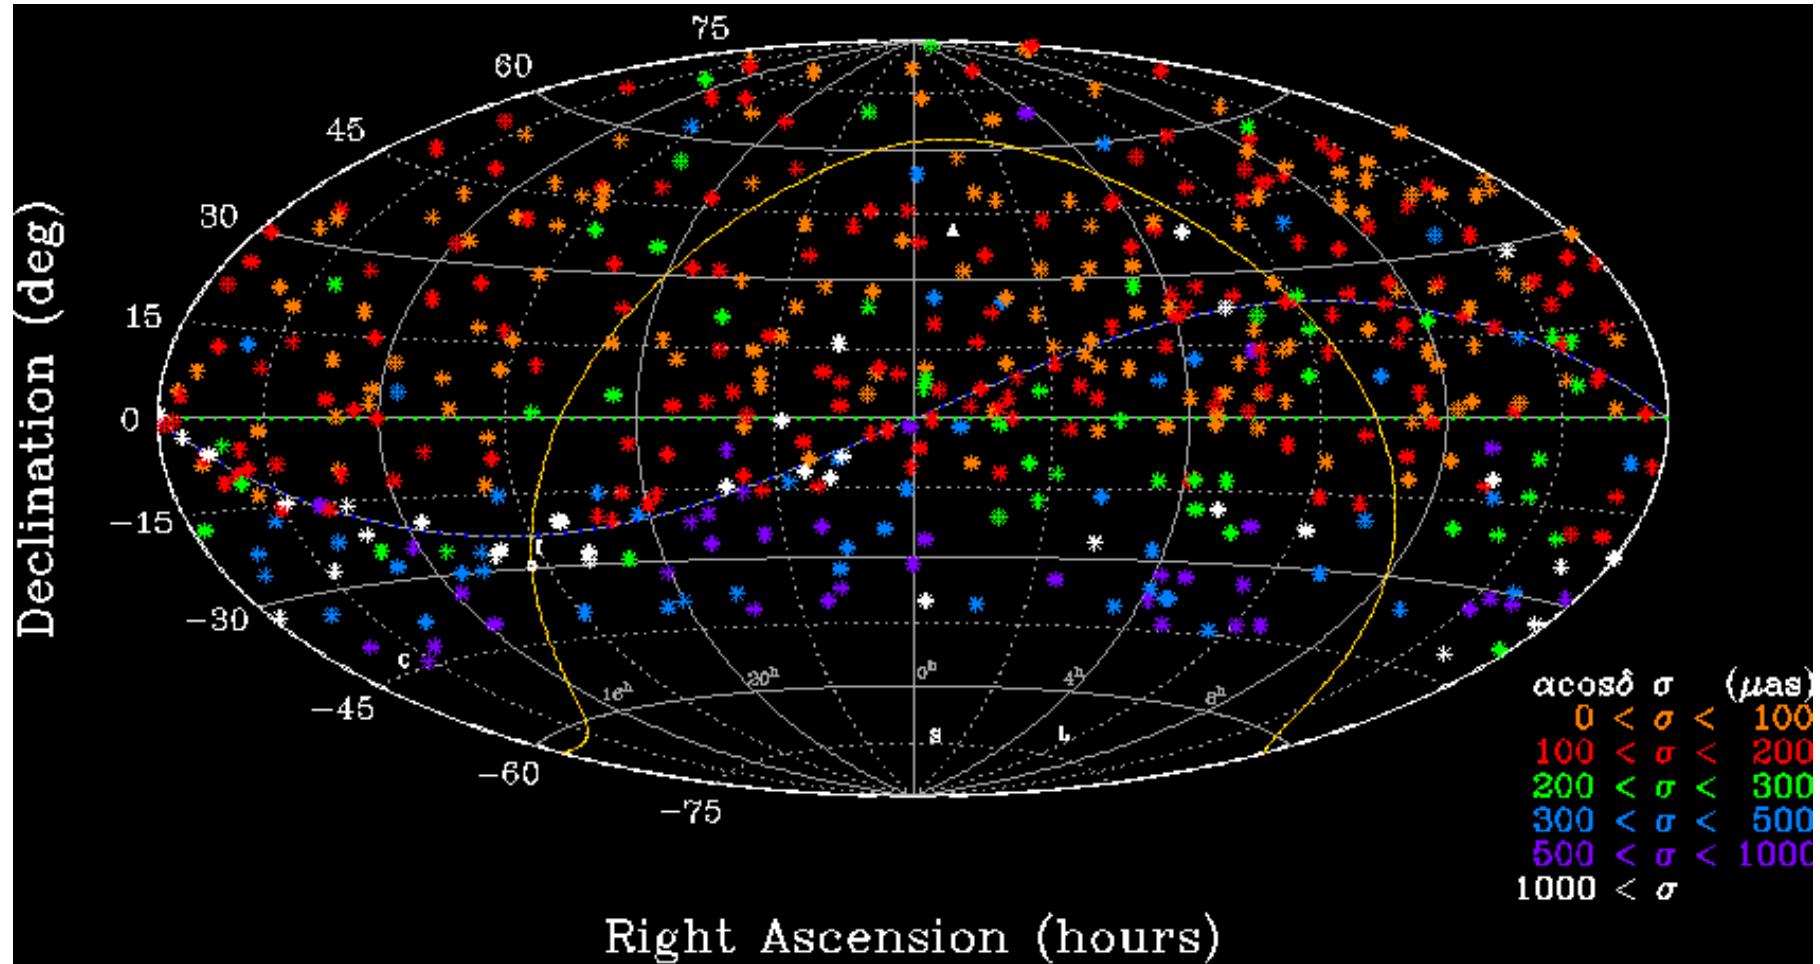


Cal. to Madrid, Cal. to Australia. Weakens south of Dec = -15deg



# X/Ka Dec results: 482 Sources

JPL

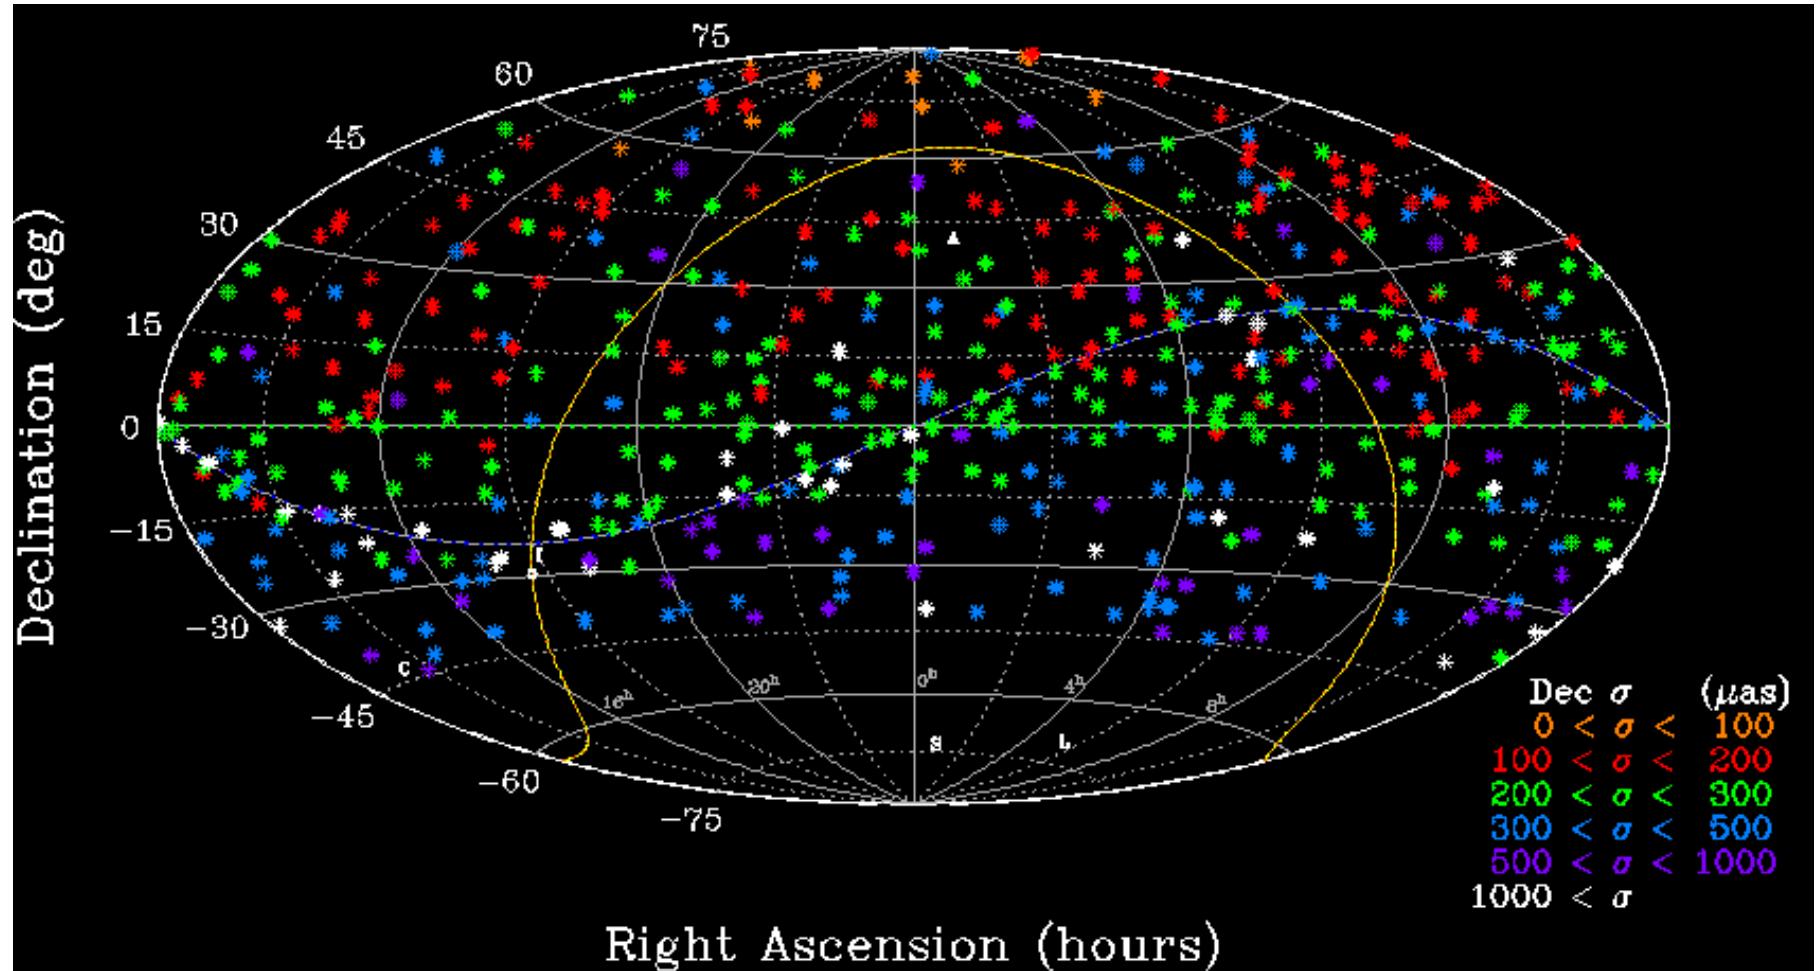

Cal. to Madrid, Cal. to Australia. Weakens southward. No  $\Delta$ Dec tilt



# Focus Work on the Tall Tent Poles

JPL

Systems Analysis shows dominant Errors are

- **Limited SNR/sensitivity**
  - already increasing bit rates: 112 to 448 Mbps. Soon to 2048?
- **Instrumentation:** already building better hardware
  - BWG phase calibrators, Digital baseband conversion & filters
- **Troposphere:** better calibrations being explored
- **Weak geometry in Southern hemisphere**
  - Limits accuracy to about 1 nrad ( $200 \mu\text{as}$ ) level
  - Need observations below Declination of -45 Deg!
  - DSN at X/Ka has only Canberra, Australia (DSS 34)
  - Need 2nd site in the Southern hemisphere
    - especially for upcoming southern ecliptic missions.



# Attacking the Error budget

JPL

- **SNR can be improved +6 to 9 dB!**
- Instrumentation:
  - Phase calibration with test signals
  - Digital Baseband Conversion & Filtering
- Troposphere cals: WVR
- Southern Geometry

# Results have been limited by SNR

## Solution:

### 1) More bits:

4X operational

16X R&D

in ~6-12 months

Will yield +3-6 dB

SNR increase

### 2) Ka pointing


Now with improved

Pointing calibrations

~3 dB more SNR

Total vs. early passes

+6-9 dB SNR increase!

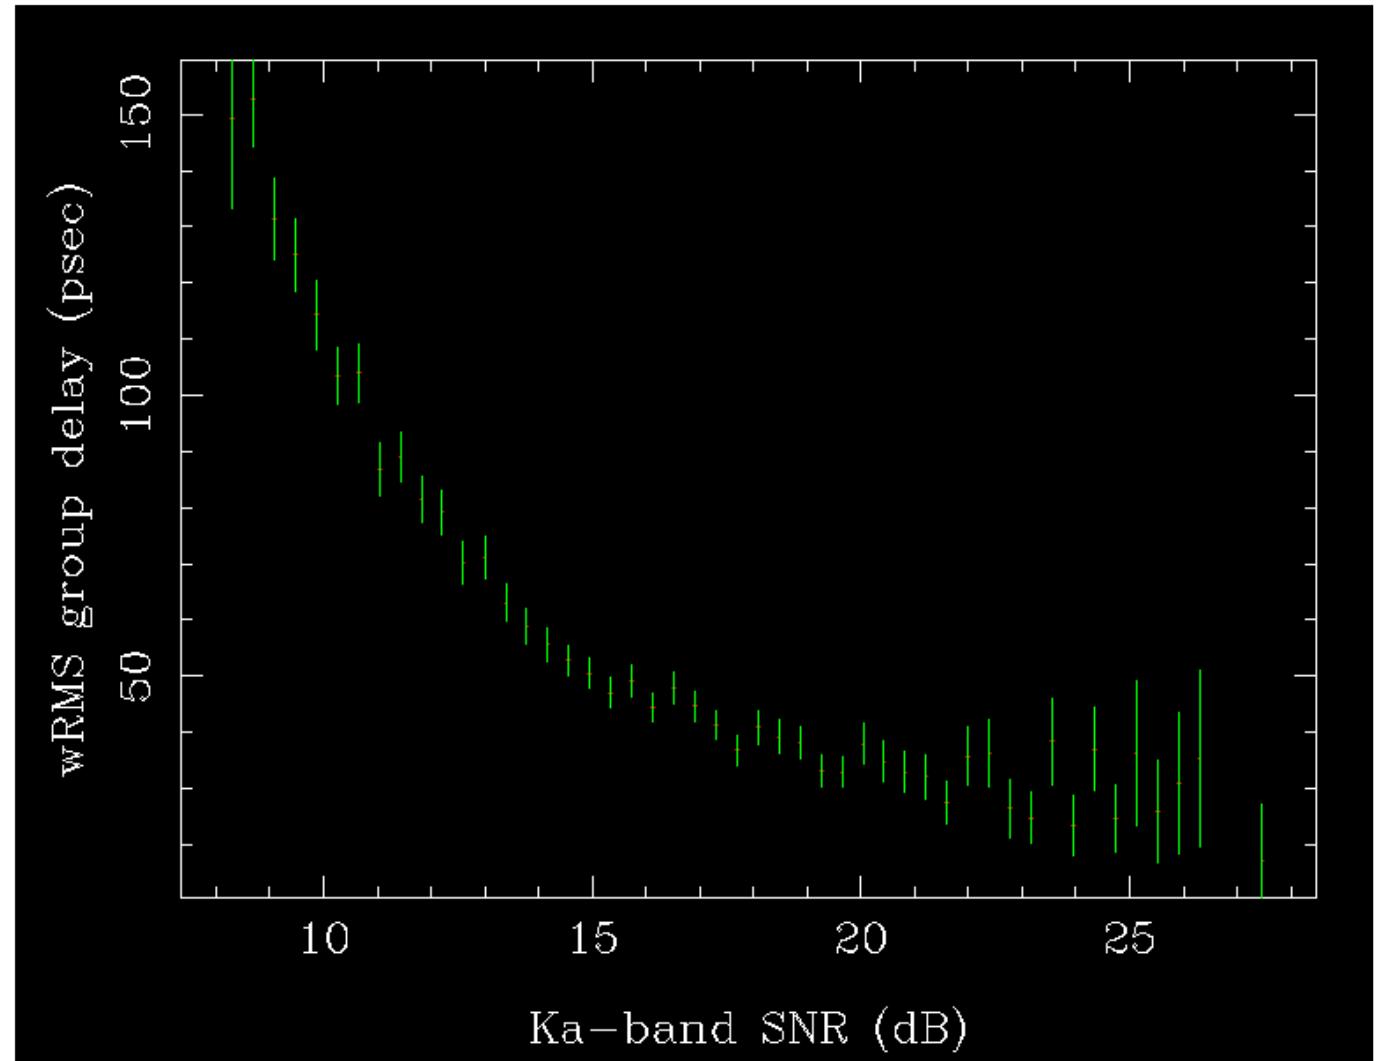

Results have been SNR limited for SNR < 15 dB



# Phased implementation, testing

JPL

- Data rate: 43 passes @ 112 Mbps (X/Ka 56/ 56 Mbps)
  - 3 passes @ 224 Mbps (X/Ka 80/144 ) ~ 3X
  - 24 recent @ 448 Mbps (X/Ka 160/288 ) ~ 5X
  - in 3-12 mo. @ 2048 Mbps (X/Ka 192/1856 ) ~32X

Total Ka improvement 56 to 1856 Mbps => 5-10 psec del. precision

**Reduces SNR below troposphere with increased Ka sensitivity!  
Thus SNR will longer be the tallest tent pole.**

Credit: NASA: C. Jacobs, D. Bagri, E. Clark, C. Garcia-Miro, C. Goodhart, S. Horiuchi, S. Lowe, E. Moll, L. Skjerve, L White




# Example: Ka-band Antenna Pointing



White pts.  
Represent  
Non-detection

Note Northern  
concentration  
of non-detects

Later, we got  
independent  
confirmation  
from ACME  
automated  
bore sight  
system of  
18 mdeg  
errors

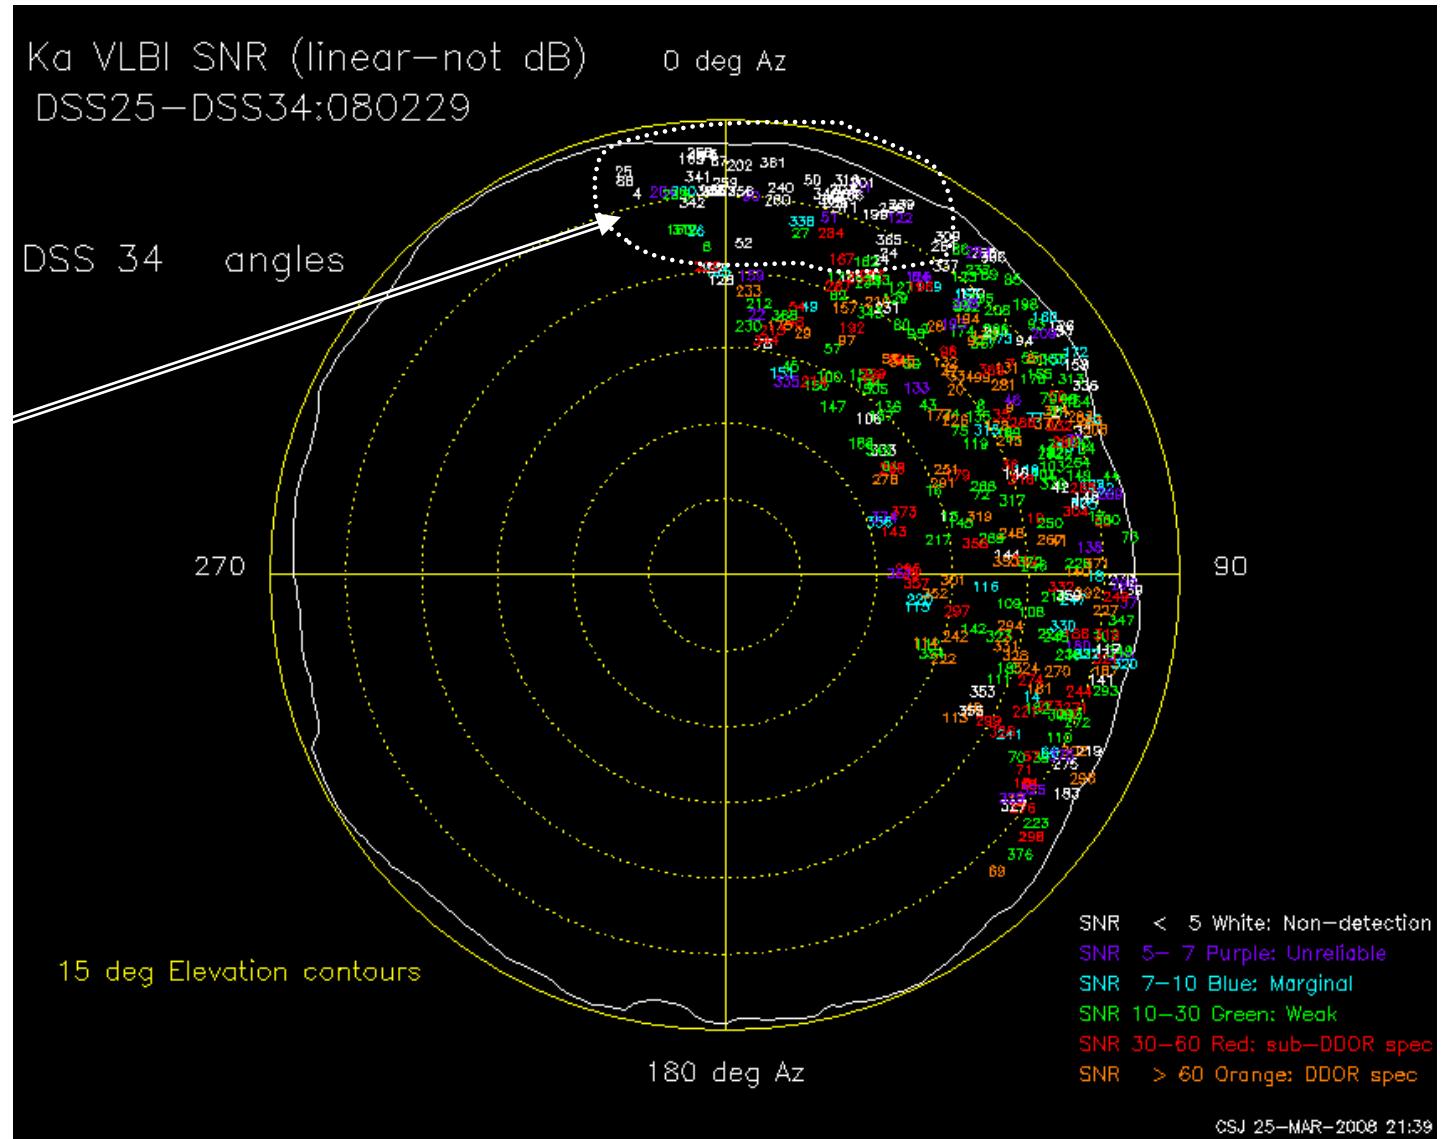



# Attacking the Error budget

JPL

- SNR can be improved +8 dB!
- **Instrumentation:**
  - Phase calibration with test signals
  - Digital Baseband Conversion & Filtering
- Troposphere cals: WVR
- Southern Geometry

# Results limited by No BWG Phase cal

**Problem:**


180 psec  
~diurnal  
effect

**Solution:**

Ka-band  
PhaseCAL  
Prototype  
Demo'd

--->

Units being  
Built.  
Operations  
in ~1 year

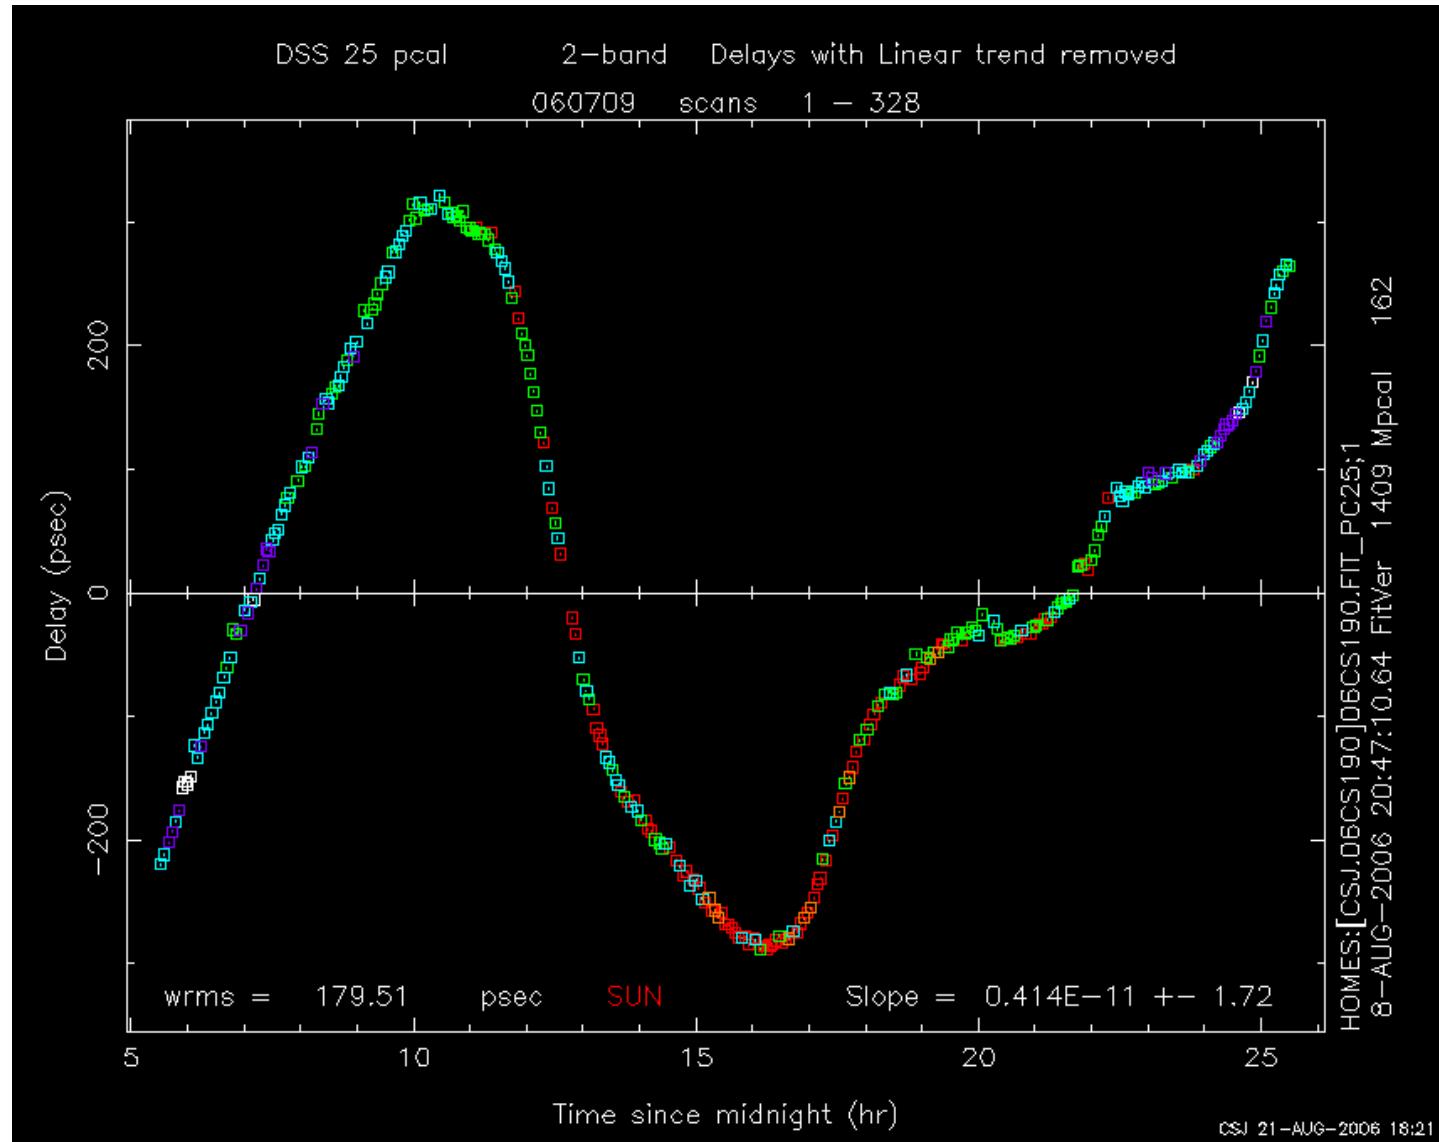


## BWG Phase Calibrator

- Concept: Tunnel diode  
Alan Rogers et al (Haystack)

- JPL prototype BWG phase cal:  
Hammel, Tucker, & Calhoun,  
JPL Progress Report, 2003

[http://tmo.jpl.nasa.gov/progress\\_report/42-154/154H.pdf](http://tmo.jpl.nasa.gov/progress_report/42-154/154H.pdf)

<http://adsabs.harvard.edu/abs/2003IPNPR.154....IH>

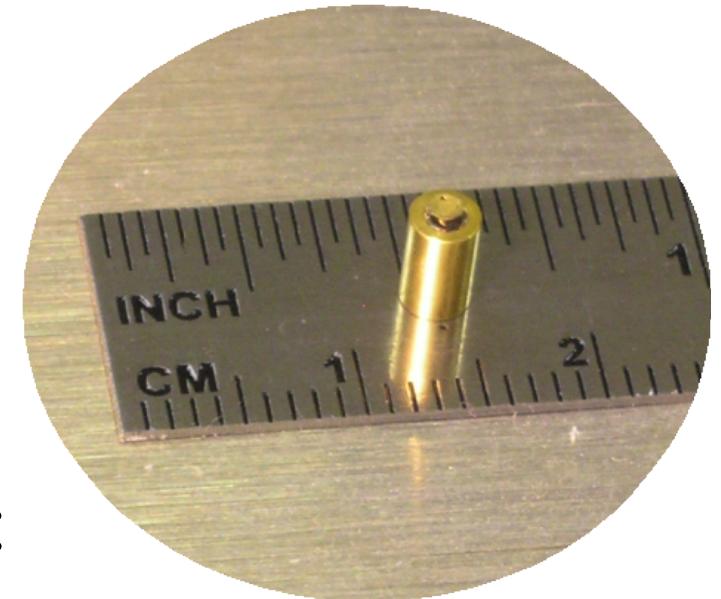


Tunnel Diode Chip

0.055" diameter by  
0.020" thick

Mounted on  
0.119" diameter carrier  
for solid grounding

- Production units: Blake Tucker


# Beam Wave Guide phase calibrator

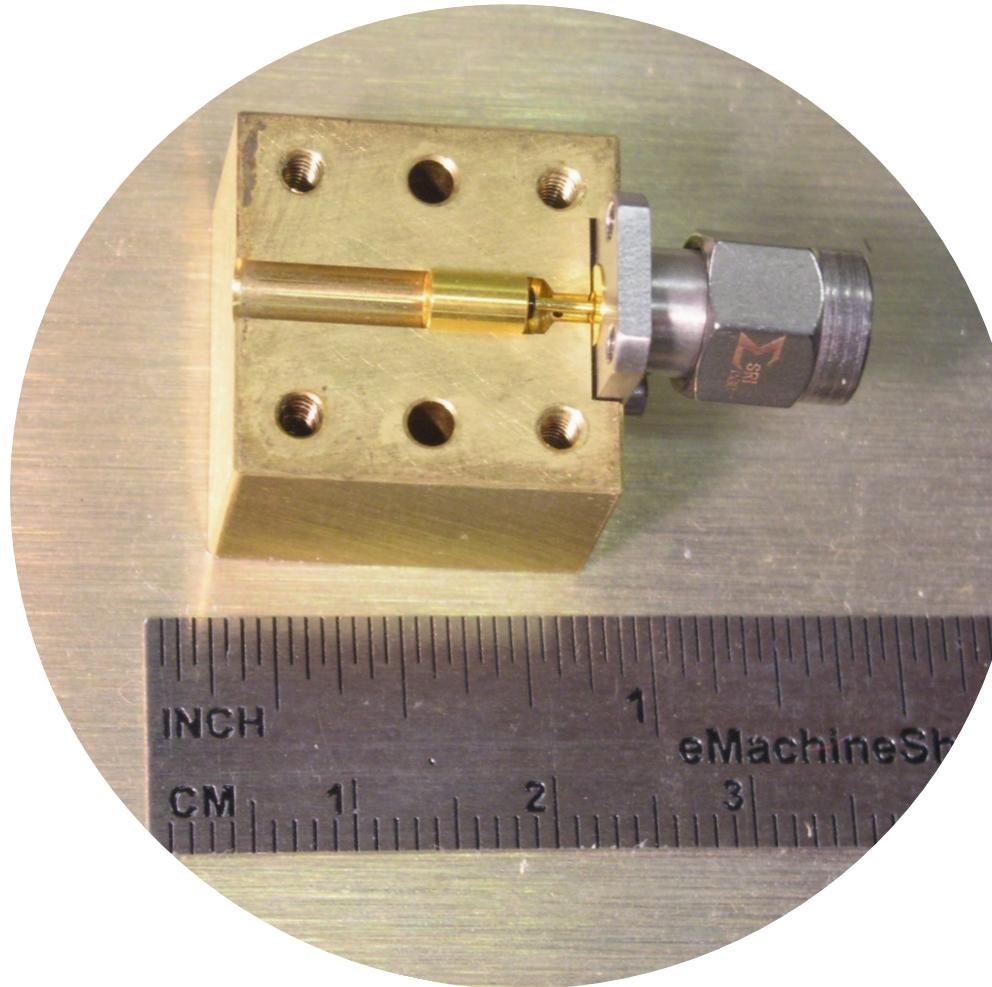

Direct interface to K connector  
inside coaxial structure.

C.S. Jacobs 5 Mar 2013

Credit: Blake Tucker

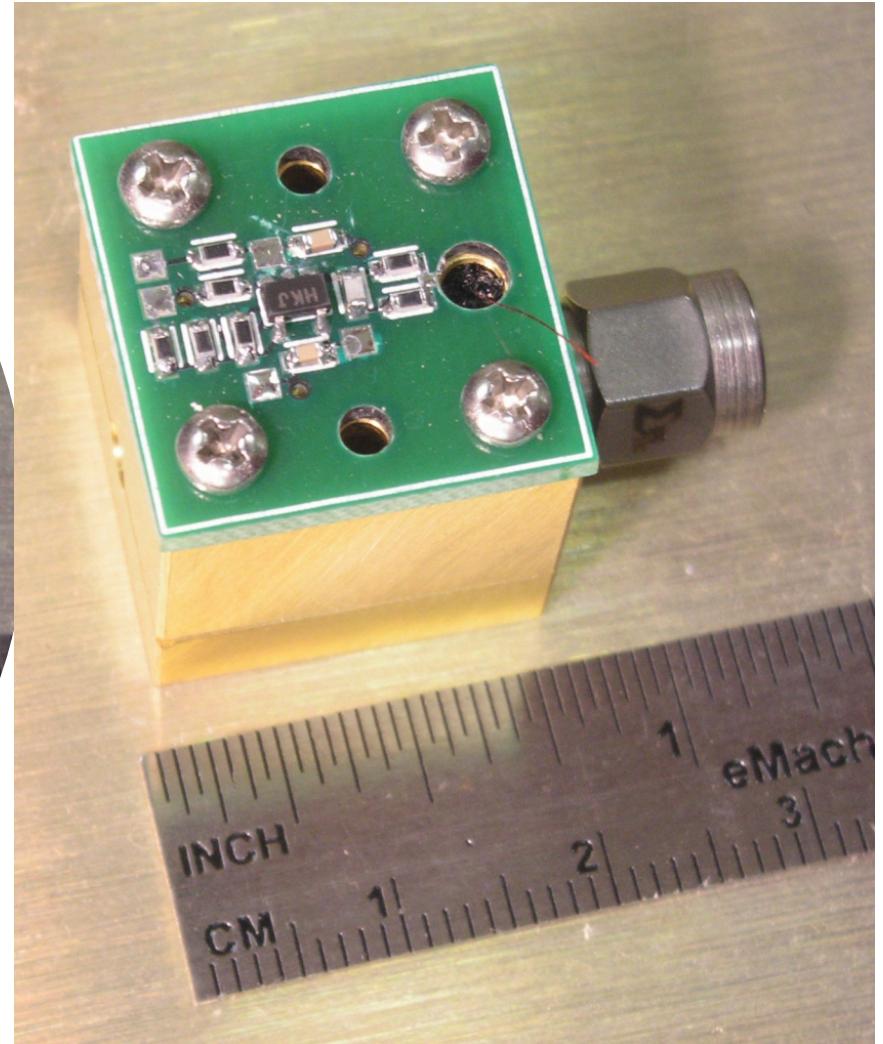

Pulse driver mounted as close as possible  
and fed through coaxial structure  
to minimize rise time and ringing

63



# *Sample, Baseband convert, Filter, Record*

JPL



IF select switch:  
12 inputs allows  
multiple bands,  
multiple antennas



Command & Control



Sampler: 1280 MHz, 8-bit/sample

Mark-5C recorder



Copper to fiber, **Digital filter**, Format



# Summary of Instrumental Improvements

JPL

<u>Instrument</u>	<u>MkIV</u>	<u>DBE/Mk5-C</u>	<u>Comment</u>
Filters	Analog 7-pole Butterworth	Digital FIR phase linear	removes phase ripple in channel
Spanned bandwidth	360 MHz	500 MHz	Mk4 limit 1.4X improvement
Data rate @ start	112 Mbps		DSN SNR limited
@ max.	896 Mbps		trop/inst. limited
@ start		2048 Mbps	trop/inst. limited
@ max.		4096 Mbps	6X sensitivity
Phase Cal: HEF/70m	Yes	Yes	
BWG	No	Yes	removes 100s of psec



# Attacking the Error budget

JPL

- SNR can be improved +8 dB!
- Instrumentation:
  - Phase calibration with test signals
  - Digital Baseband Conversion & Filtering
- **Troposphere cals: WVR**
- Southern Geometry

- Modified Least Squares to account for observation correlations -- both temporal and *spatial*


- Use Kolmogorov frozen flow model of Treuhhaft & Lanyi (Radio Sci. 1987)

<http://adsabs.harvard.edu/abs/1941DoSSR..32...16K>  
<http://adsabs.harvard.edu/abs/1987RaSc...22..251T>

- Model increases information available to the estimation process
  - 1) Reduces parameter biases
  - 2) Reduces parameter sigmas

- Validation: Currently improves agreement X/Ka vs. S/X catalogs by about 10% in Declinations.  
Expect ~30% after SNR & phase cal errors peeled away to reveal troposphere errors.

Romero-Wolf & Jacobs, IVS, 2012 [http://www.oan.es/gm2012/pdf/oral\\_id\\_119.pdf](http://www.oan.es/gm2012/pdf/oral_id_119.pdf)

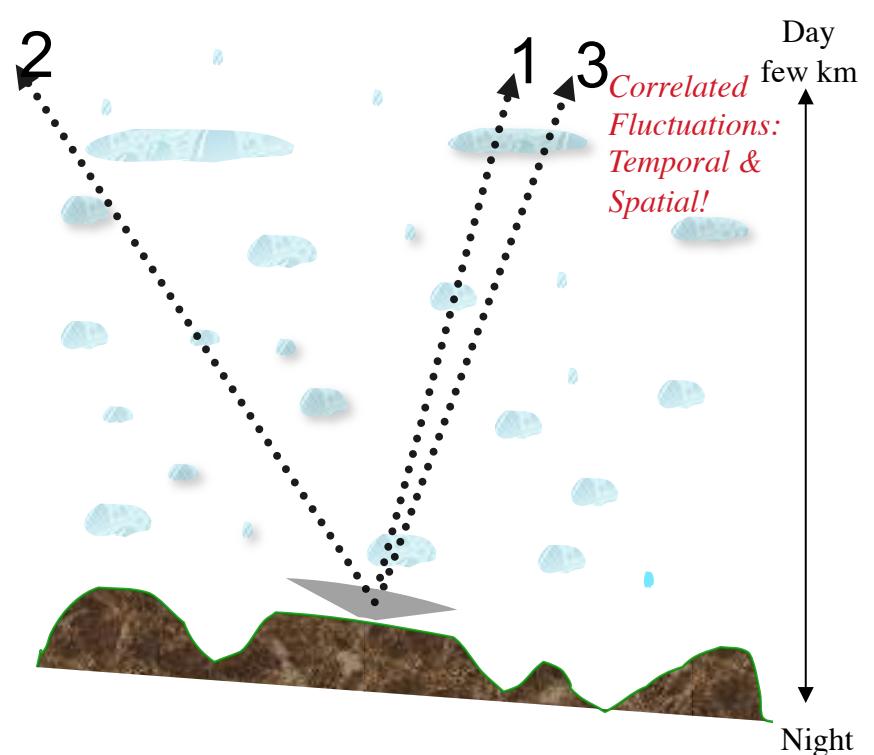



# Calibrating Troposphere Turbulence

JPL

- JPL Advanced Water Vapor Radiometer

~ 1 deg beam better matches VLBI  
improved gain stability  
improved conversion of brightness  
temperature to path delay

Tanner & Riley, Radio Sci., 38, 2003  
<http://adsabs.harvard.edu/abs/2003RaSc...38.8050T>



- Initial demos show 1mm accuracy  
Goldstone-Madrid 8000 km baseline  
using X/Ka phase delays


*Jacobs et al, AAS Winter 2005.*

*Bar Sever et al , IEEE, 2007.*


<http://adsabs.harvard.edu/abs/2007IEEEP..95.2180B>

- A-WVRs deployed at Goldstone/Madrid  
Seeking funding for Tidbinbilla, Aus
- **A-WVR not used yet for Operations**

## VLBI Delay Residuals DOY 200 Ka-Band DSS26-DSS55

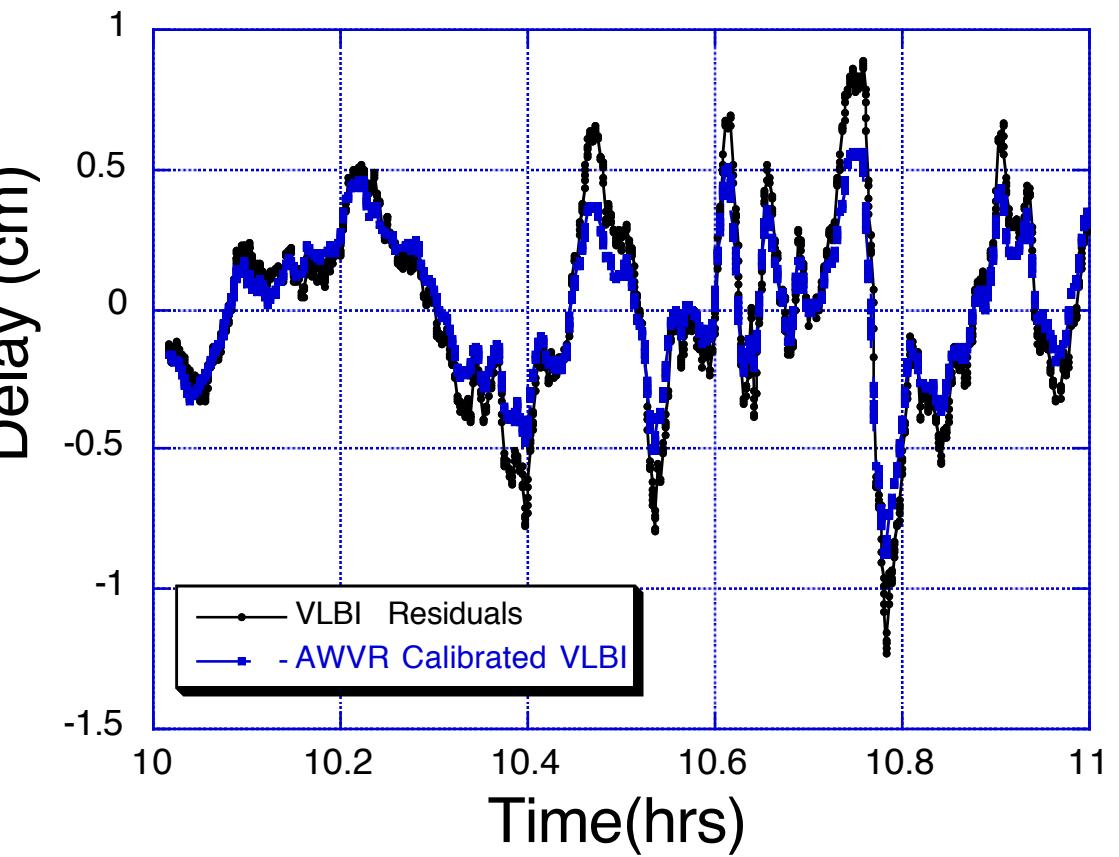

- SNR can be improved +8 dB!
- Instrumentation:
  - Phase calibration with test signals
  - Digital Baseband Conversion & Filtering
- Troposphere cals: WVR
- **Southern Geometry**

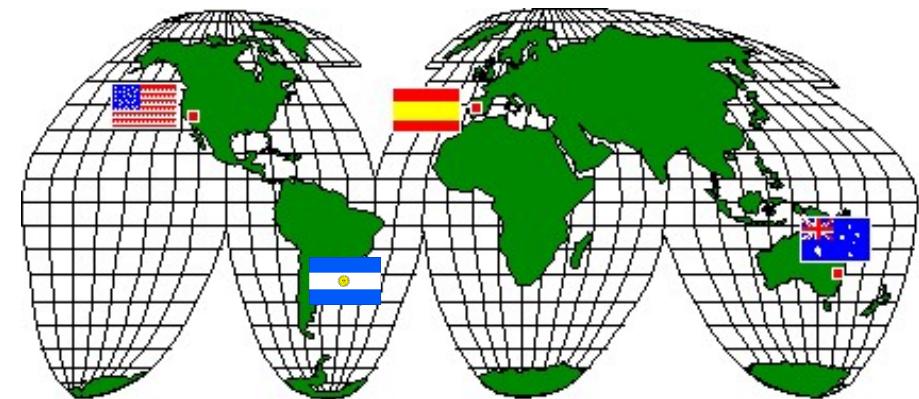


# Need 2nd Station in South

- Almost no Ka sources meet the accuracy goal south of equator!

- No coverage of South polar cap (-45 to -90 Dec)
- DSN weakly covers southern Ecliptic: only one strong baseline as California-Spain is weak in south

DSN X/Ka Frame after 50 sessions


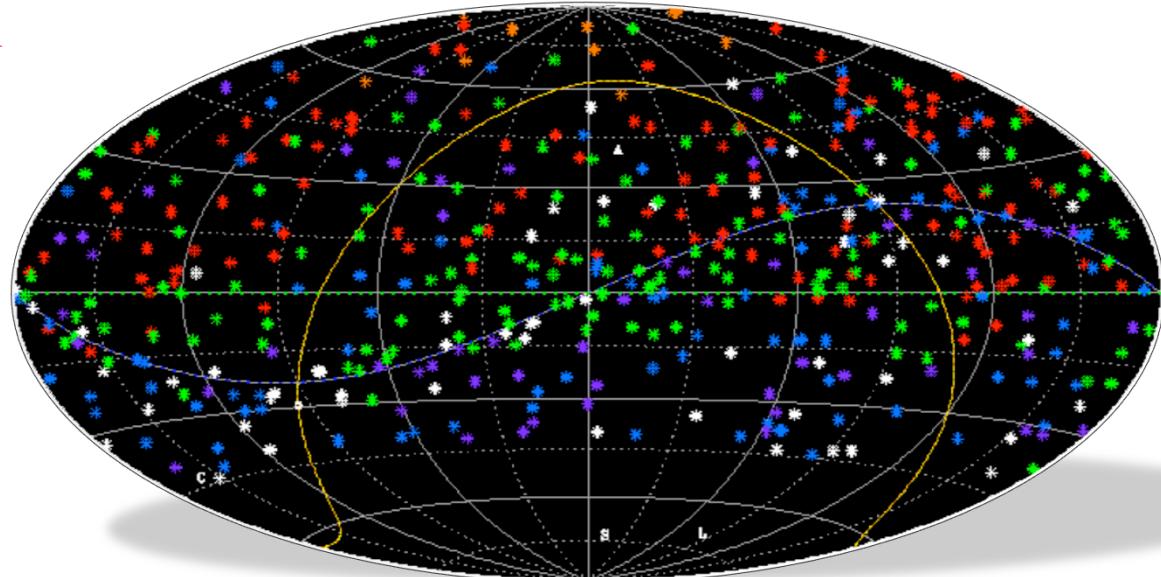


## Declination 1-sigma

Orange	0-0.5 nrad	meets future ΔDOR spec
Red	0.5-1.0	current ΔDOR spec
Green	1.0-1.5	
Blue	1.5-2.5	
Purple	2.5-5.0	
White	5.0	

# Southern Stations?

- ESA Deep Space Antennas (DSA-1, 2, 3)
  - Cebreros, Spain: **duplicate geometry to DSN in Robledo**
  - New Norcia/Perth, Australia (helps but only 3000km from DSN Tidbinbilla)
  - **Malargue, Argentina:** Ideal, online fall-2012, NASA-ESA collaboration
    - 35m, X/Ka-band, 9,500 km baseline
    - Dry desert site is good for Ka-band
    - HA-Dec coverage: Tidbinbilla to Malargue:

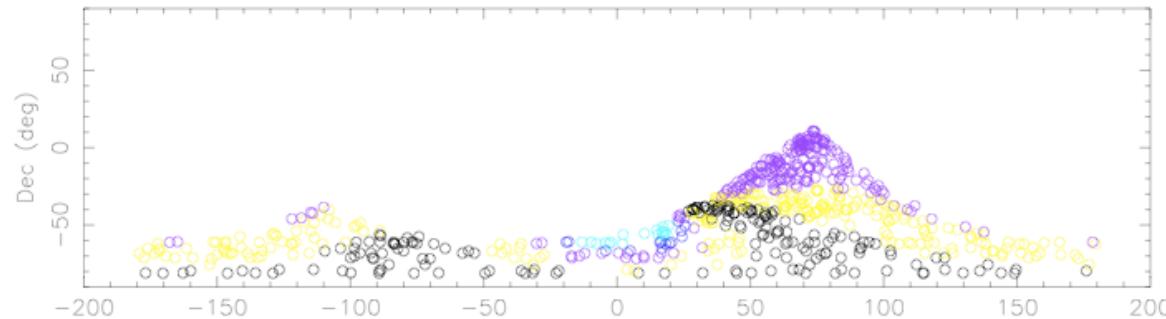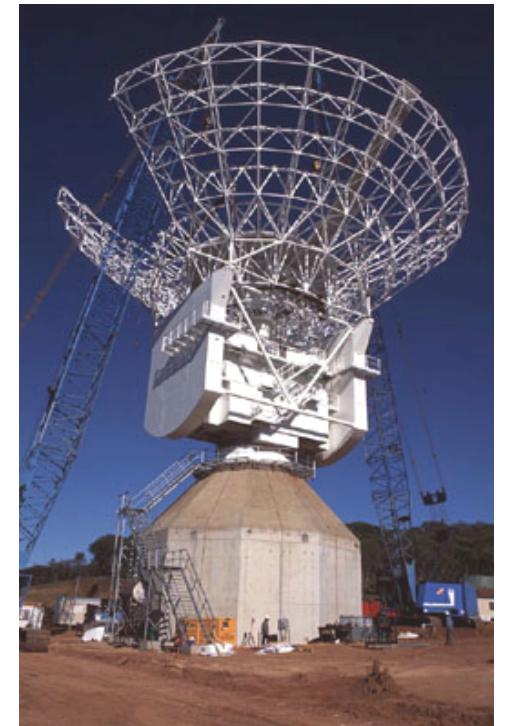


- Hart, South Africa
  - diameter 26m
  - Resurfaced in 2005 (0.5mm RMS) efficient to 22 GHz




# DSS 34 to Malargue, Argentina (DSA-3)


JPL

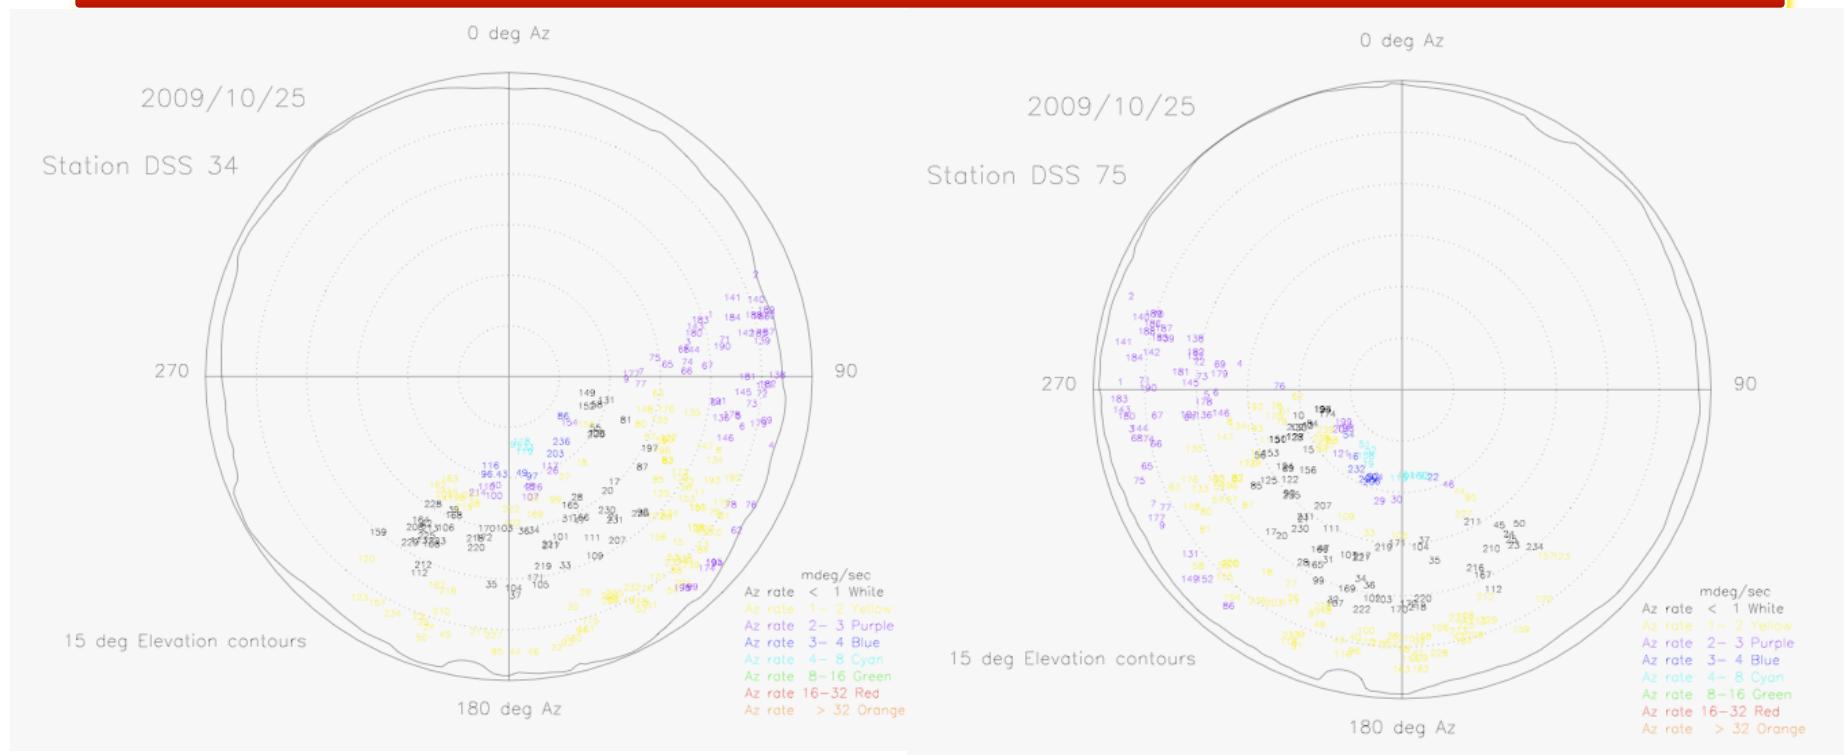

Simulated  
Coverage:  
**Dec +10 deg  
to –90 deg**

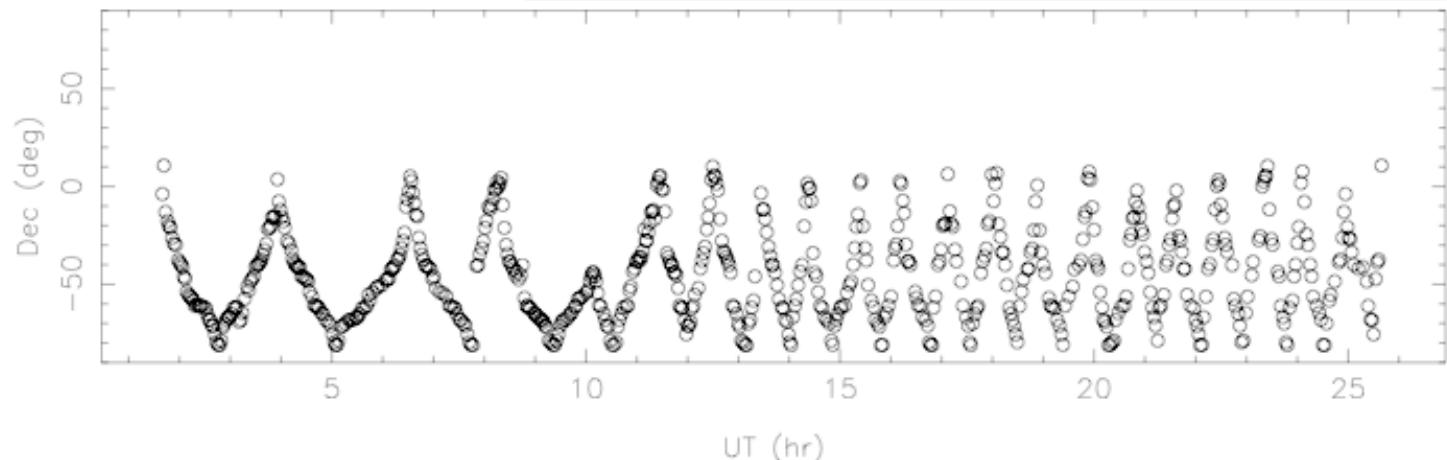

# Simulation of Added Southern Station

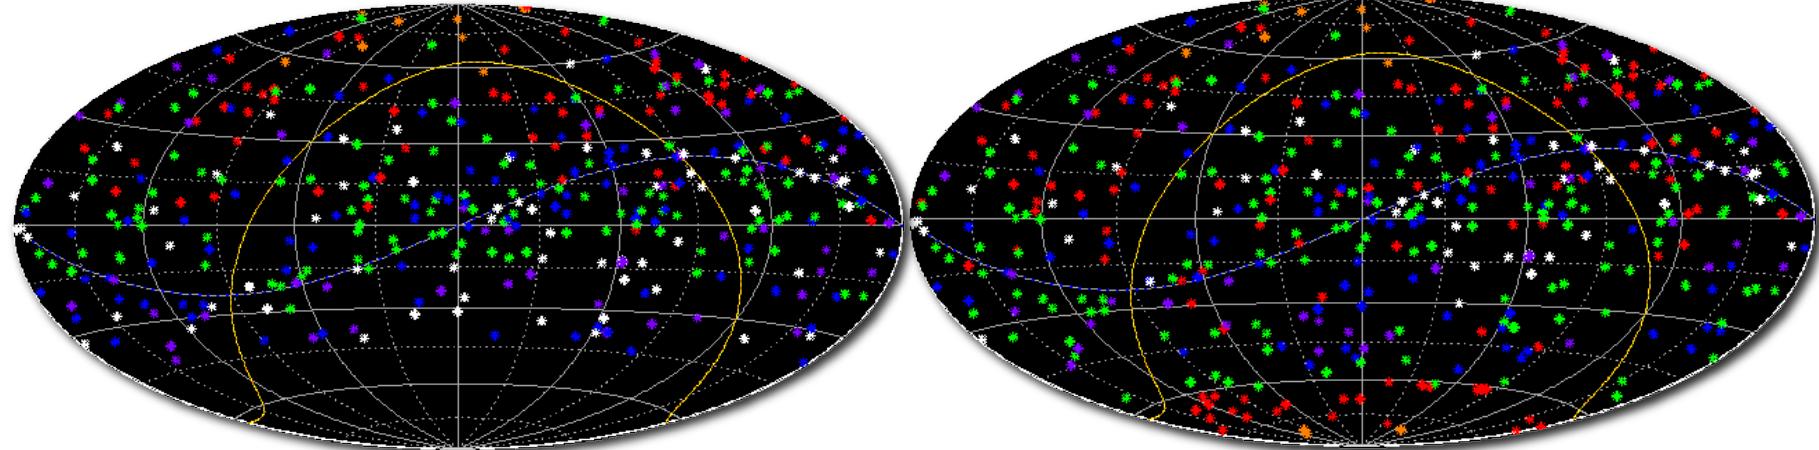

## *Before Southern Data*

- 50 real X/Ka sessions augmented by simulated data simulate 1000 group delays, SNR = 50  
~9000 km baseline: Australia to S. America or S. Africa
- Completes Declination coverage: cap region -45 to -90 deg 200  $\mu$ as (1 nrad) precision in south polar cap, mid south 200-1000  $\mu$ as, all with just a few days observing.

## *After*

<u>Declination Sigma</u>	
Orange:	< 100 $\mu$ as
Red:	< 200
Green:	< 300
Blue:	< 500
Purple:	< 1000
White:	> 1000

Bourda, Charlot, Jacobs, 2011 <http://adsabs.harvard.edu/abs/2011EAS....45..377B>





# Malargüe: The Next X/Ka VLBI Station



X/Ka: ESA Deep Space Antenna DSA 03

- **Malargüe, Argentina**
- Fall-2012 NASA/ESA collaboration
- 35-m, X/Ka-band, 9,500 km baseline  
Argentina-Australia covers south polar cap  
Full sky coverage for X/Ka!!
- Argentina-California & Australia-California  
orthogonal baselines for mid-latitudes
- High (1.5km), dry desert site: good for Ka-band
- HA-Dec coverage: Tidbinbilla to Malargüe:

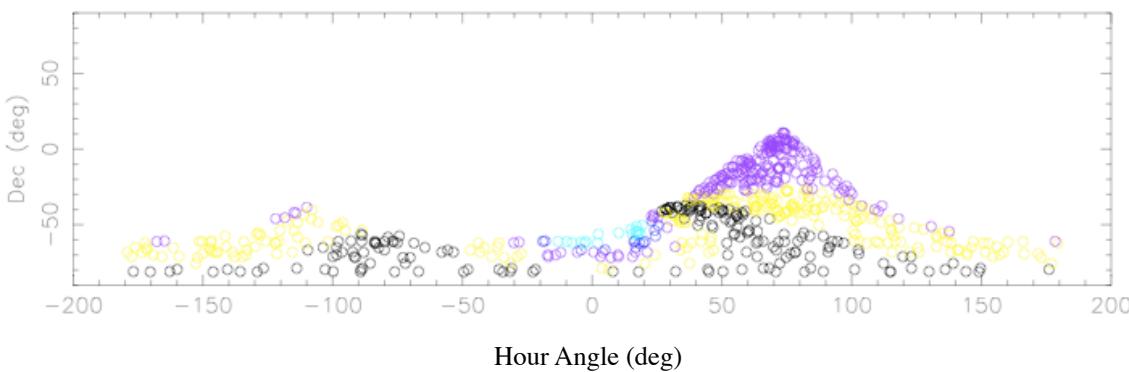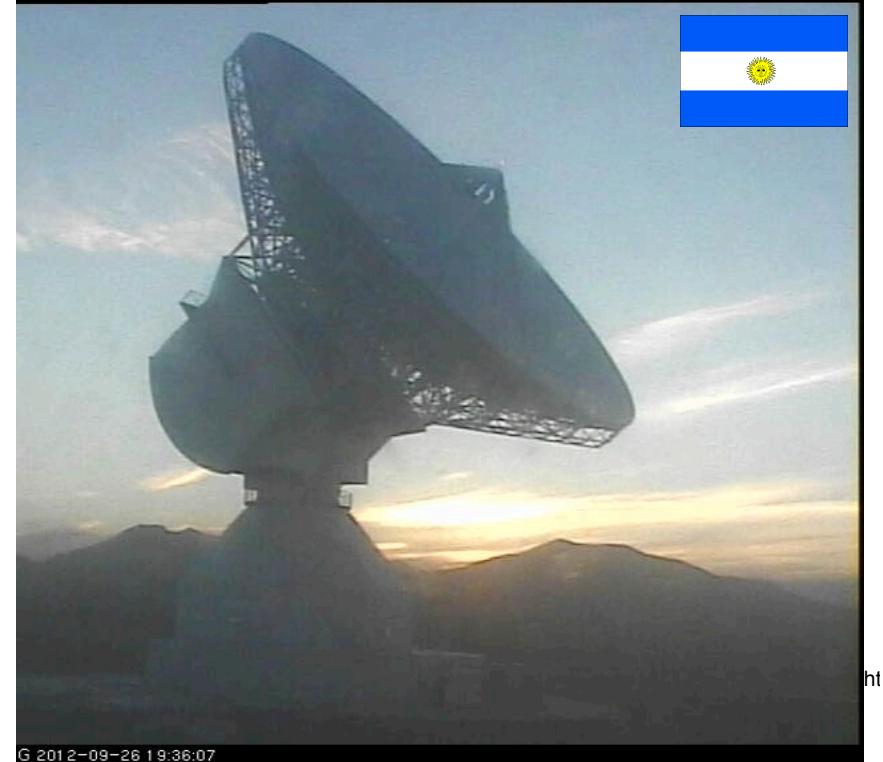

Malargüe, Argentina 35-meter as of 26 Sept .2012

ESA Deep Space Antenna  
*X/Ka-band capable*



# X/Ka stations for Celestial Frame




ESA's Argentina 35-meter antenna **adds 3 baselines** to DSN's 2 baselines

- Full sky coverage by accessing south polar cap
- near perpendicular mid-latitude baselines: CA to Aust./Argentina

Maps credit: Google maps




# NASA-ESA 32GHz RA results: 577 sources

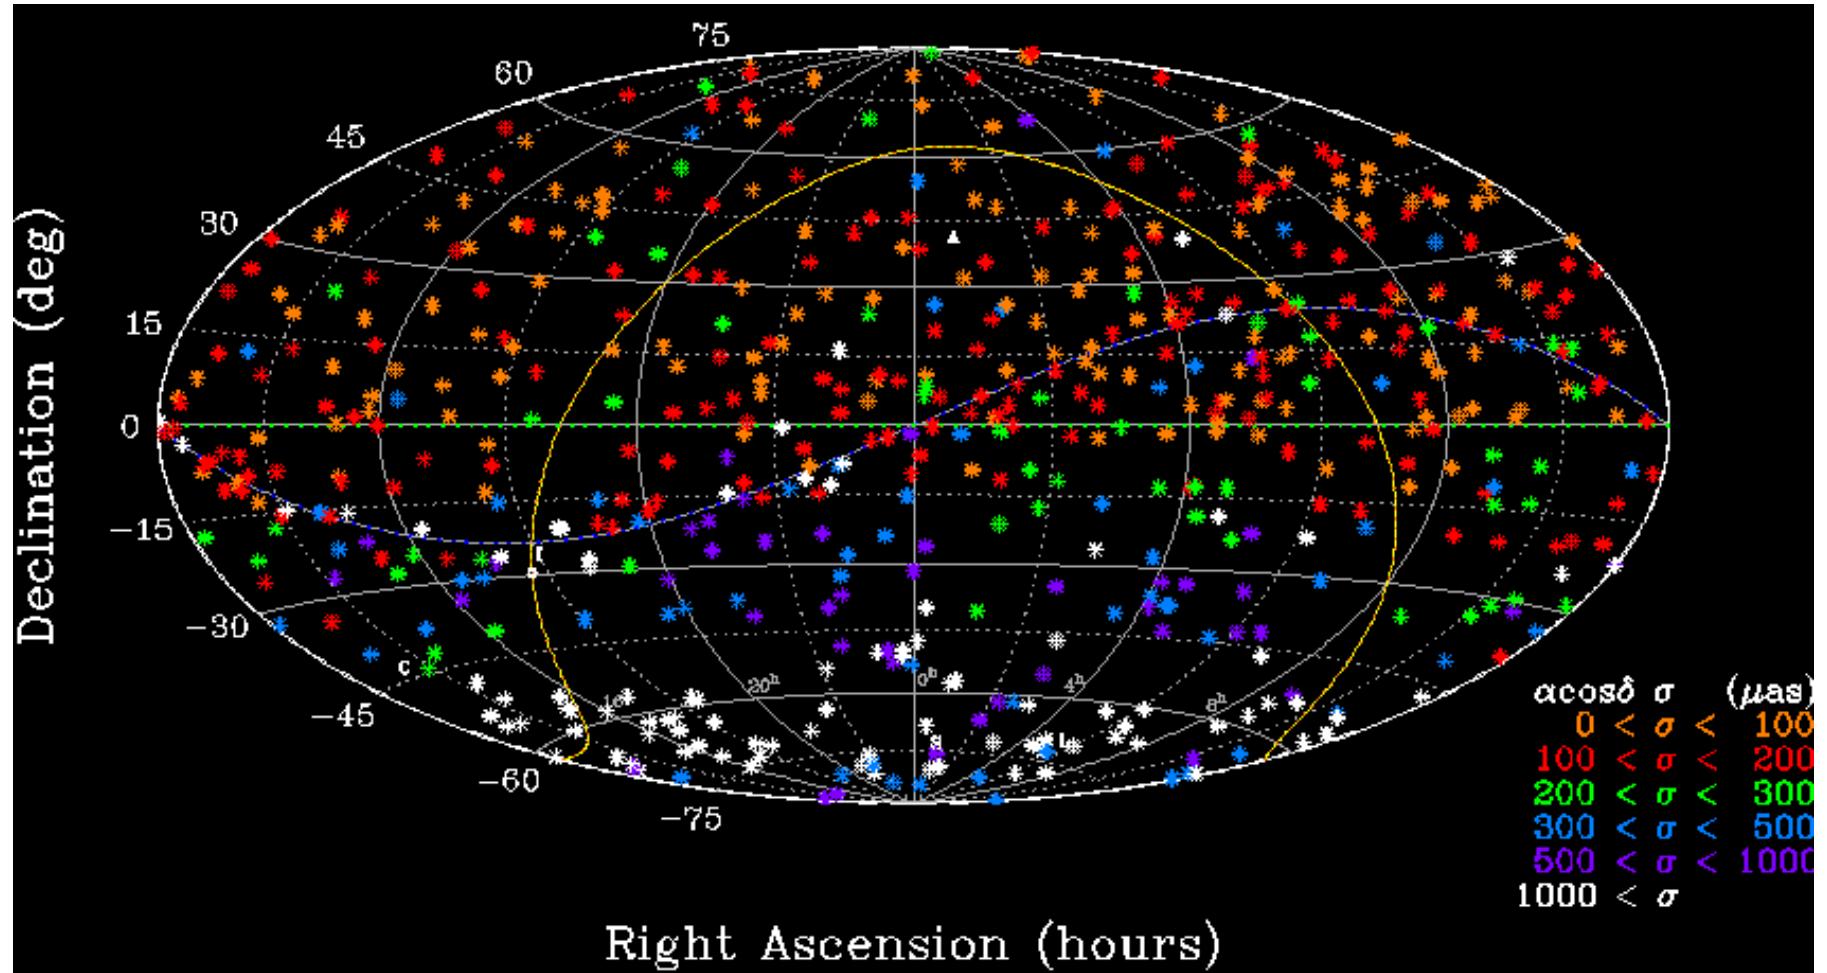

Goldstone, CA to Madrid & Australia + Malargüe to Australia.  
95 in south cap (dec<-45); 19 ICRF2 Defining; 2/3 of cap non-ICRF2



# NASA-ESA 32GHz Dec results: 577 sources

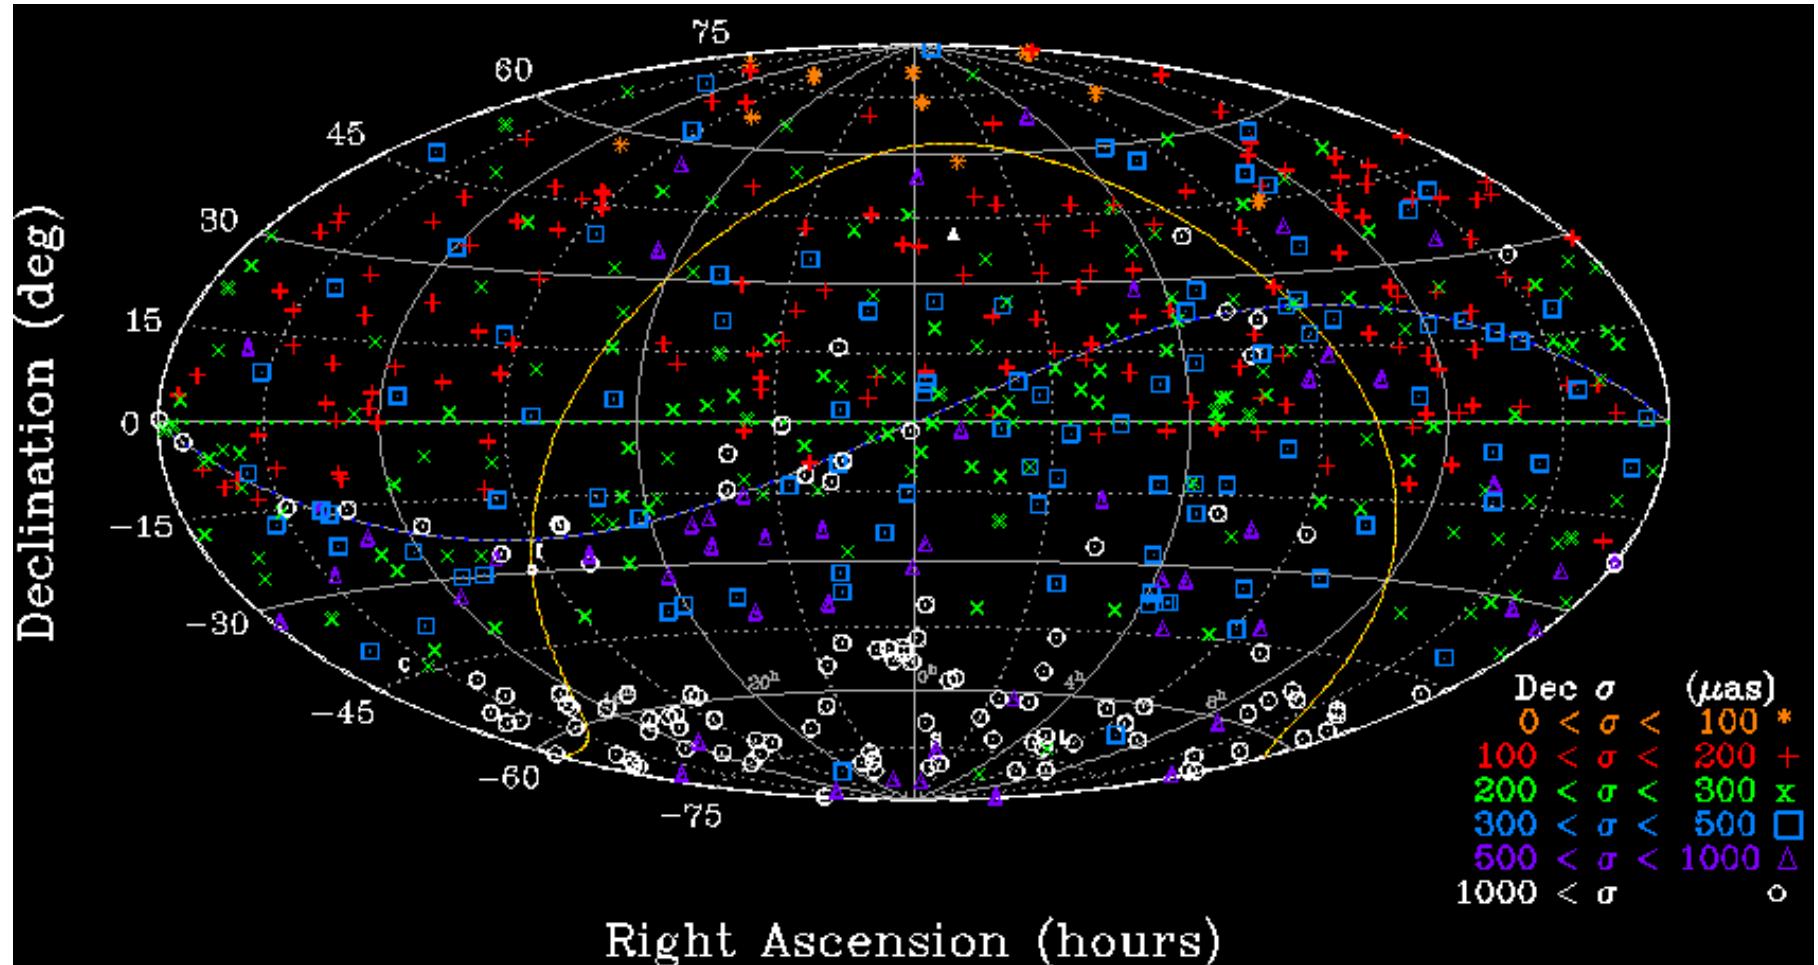

Goldstone, CA to Madrid & Australia + Malargüe to Australia.



# Outline

JPL

## I. Concepts and Background:

- A. What is a Reference frame? Concepts, uses, desired properties
- B. Networks: The instruments used to build the frame
  - ad hoc, VLBA, EVN, Global, DSN, LBA, AuScope, etc.
- C. Brief history of Astrometry: The ‘fixed’ stars aren’t so fixed.
  - 1. Precession, proper motion, nutation, parallax
  - 2. Invention of radio astronomy. VLBI’s pursuit of (sub)milli-arsecond accuracy.

## II. Celestial Frames built using VLBI

- A. Surveys: Single dish, connected array: JVAS, AT20G, and VLBI: VCS, LCS
- B. ICRF-1, ICRF-2: The IAU moves to from optical (stars) to radio (quasars)
- C. Higher frequency radio frames: K&Q (24 & 43GHz), XKa (32 GHz)

## III. The Path to the Future:

- A. Error Budgets: a tool for allocating resources for improvement
- B. Next-generation geodetic VLBI: Ultra-wide 2-14 GHz
- B. Case study: Path to Improved X/Ka (8.4/32 GHz) Frame
- C. ICRF-3: the next standard radio frame**
- D. Gaia: the return of optical




## III.C. ICRF-3



### 3<sup>rd</sup> generation International Celestial Reference Frame

#### Assessment of needs for ICRF-3

1. VLBA Cal Survey is most (2/3) of ICRF-2  
but positions are 5X worse than rest of ICRF-2
2. ICRF-2 is weak in the south
3. High frequency frames  
Fewer sources, weak in the south

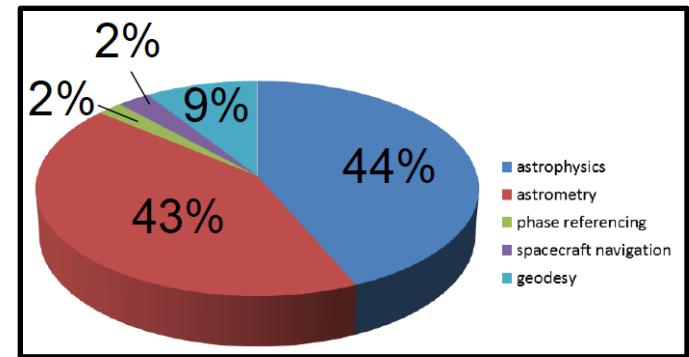

ICRF-1 users: Distribution of ~400 citations  
Credit: R. Heinkelmann, ICRF-3 work group

#### Goals:


1. Complete ICRF-3 by 2018  
in time for comparisons with Gaia optical frame
2. Competitive accuracy with Gaia  $\sim 70 \mu\text{as}$  (1-sigma RA, Dec)
3. Uniform precision for all sources. Implies improving VCS positions.
4. High frequency frames (K, XKa, Q?)  
Improve number, accuracy, and southern coverage
5. Maximize high quality optical-radio tie sources

**ICRF-2 reference:** Ma et al, IERS, 2009. <http://adsabs.harvard.edu/abs/2009ITN....35....1M>

## III.C. ICRF-3 Needs

Assessment of needs for ICRF-3


- Uneven precision of current ICRF-2 VCS's 2200 sources (2/3 of the ICRF-2)  
VCS precision is typically  $1000 \mu\text{as}$  or 5 times worse than the rest of ICRF2.

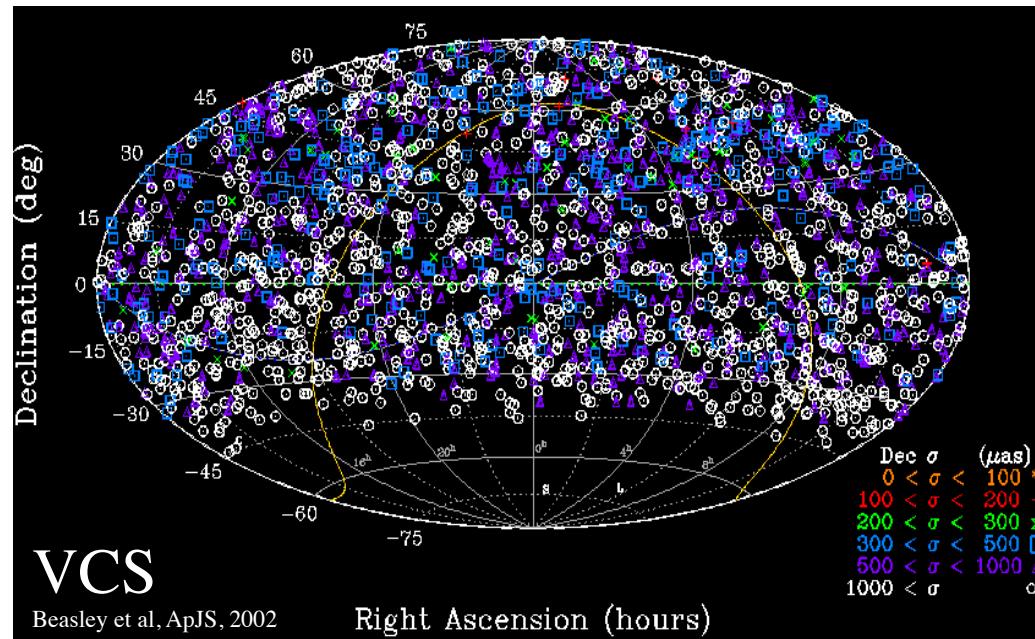

ICRF-2	Item	VCS	non-VCS	factor
	N_src	2197	1217	VCS 1.8X better
	median sessions	1	13	VCS 13X worse
	median observations	45	249	VCS 5.5X worse
	median time span	0	13 years	VCS arbitrarily worse
	median RA sigma	621	130 $\mu\text{as}$	VCS 4.8X worse
	median Dec sigma	1136	194 $\mu\text{as}$	VCS 5.9X worse

## III.C. ICRF-3 Needs


Assessment of needs for ICRF-3

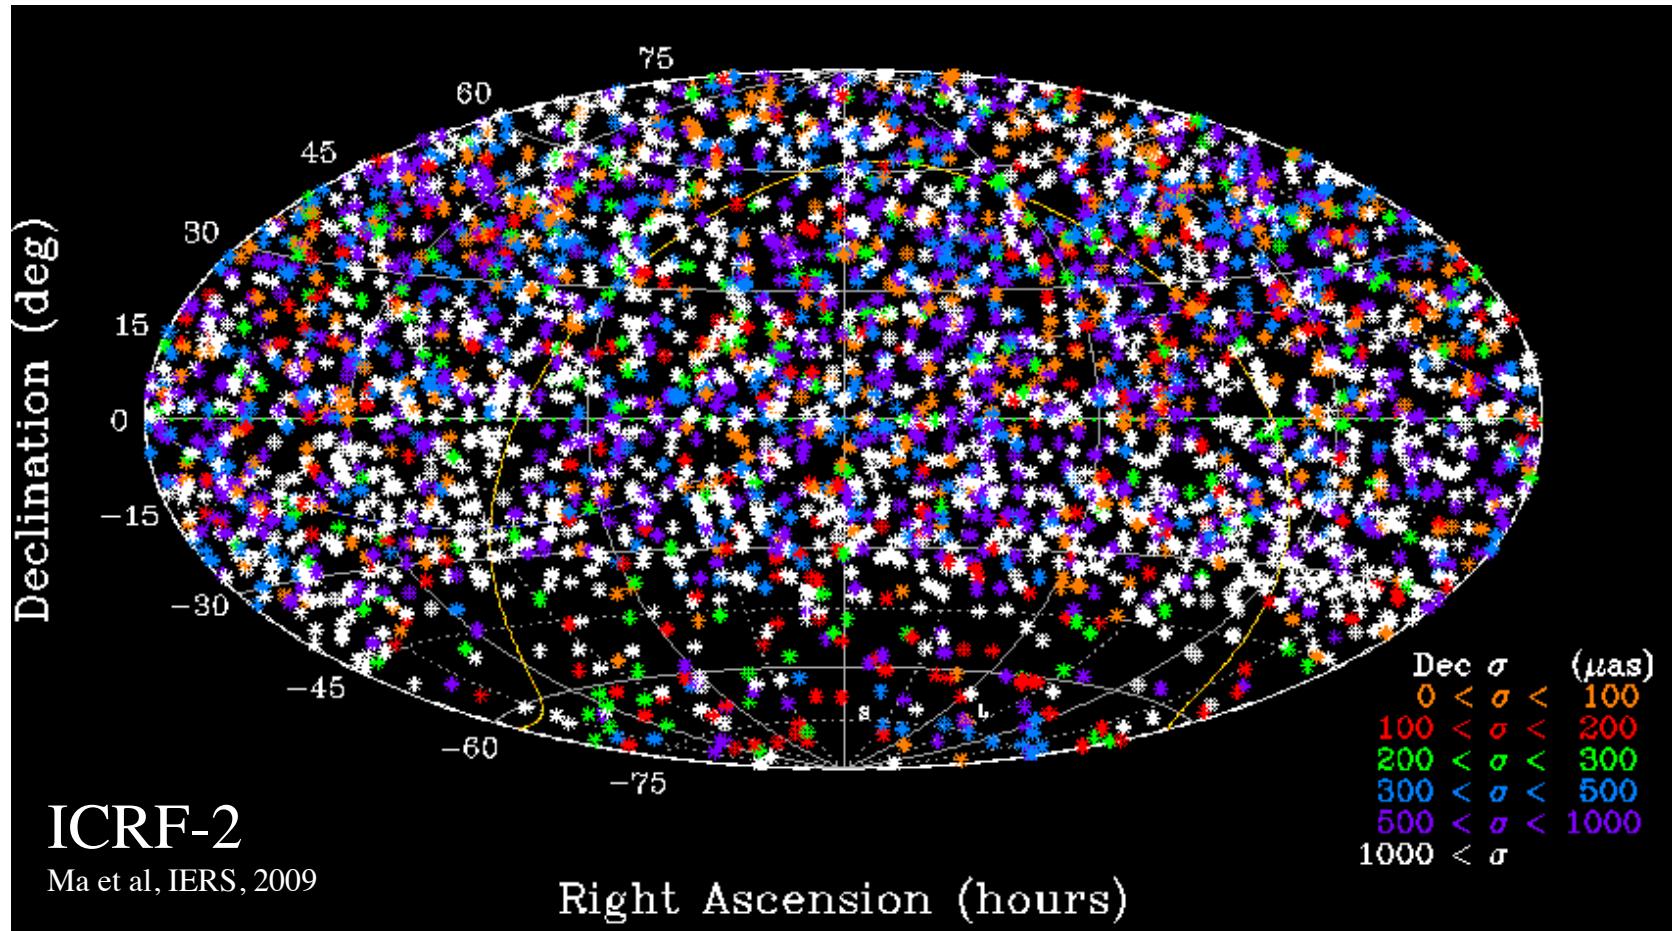

### 2. Southern Hemisphere:

VLBI in general and ICRF-2 specifically lacks southern observations

## III.C. ICRF-3 Needs

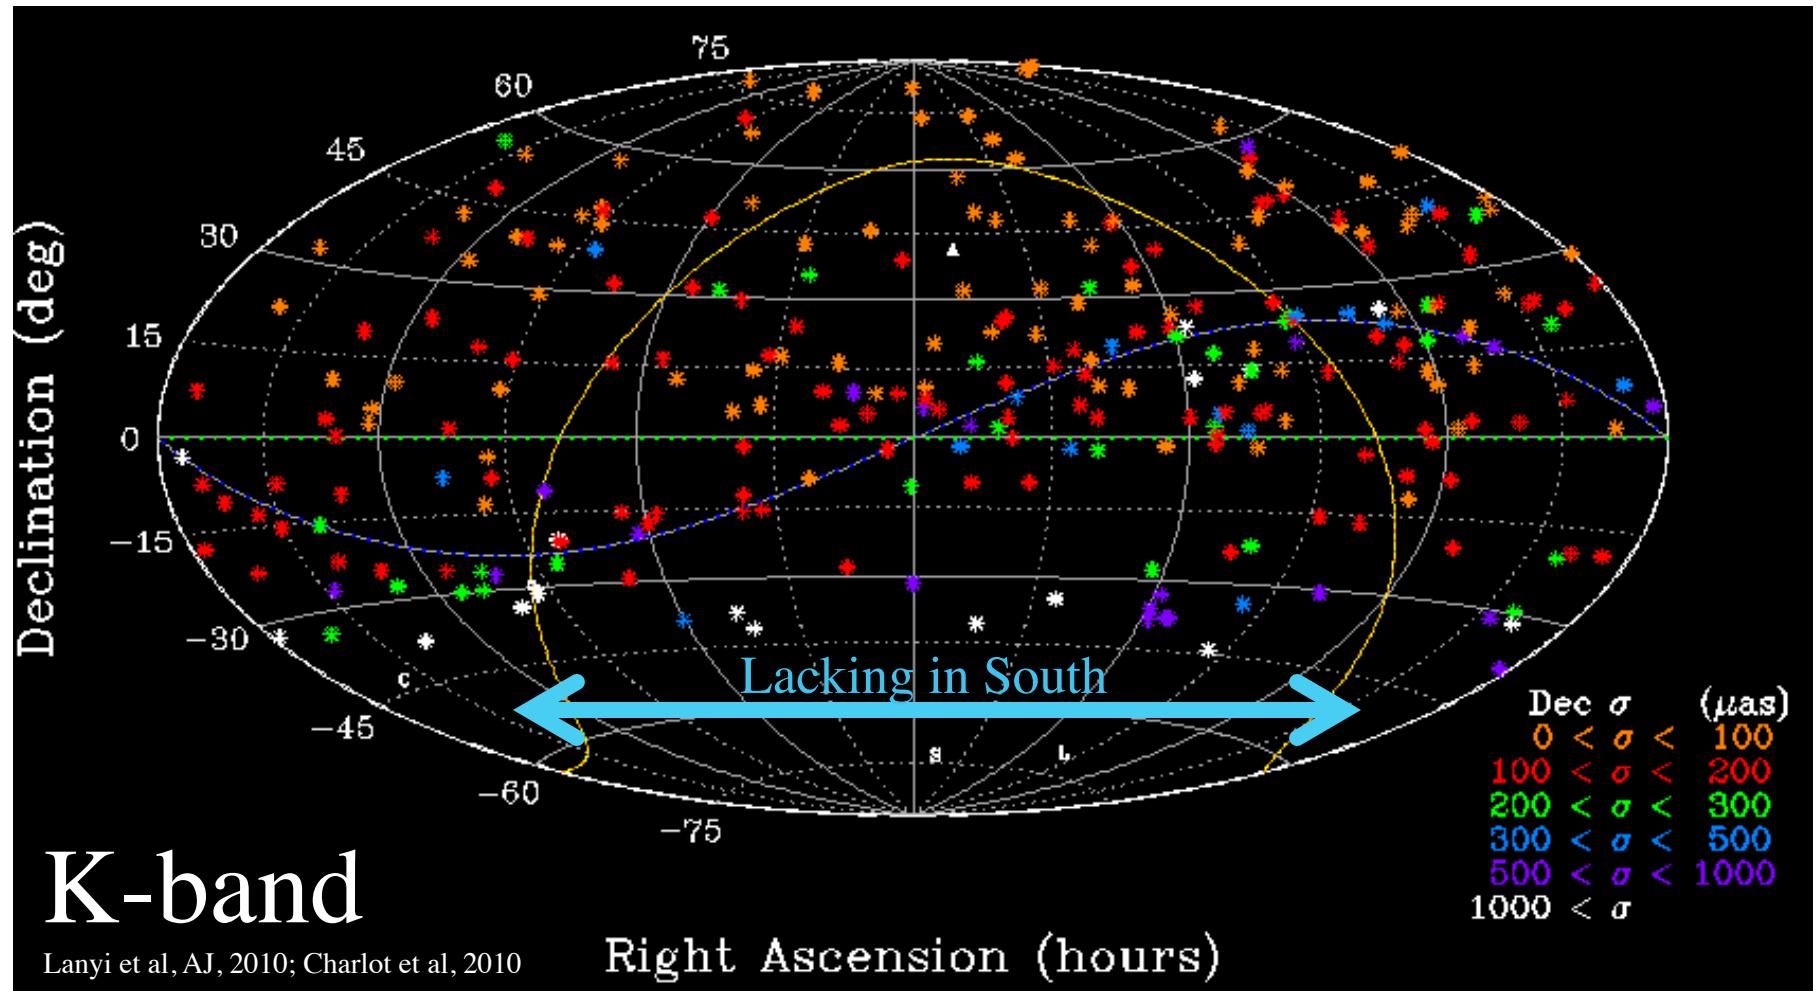

- 3. High frequency frames a K (24 GHz), XKa (32 GHz), and Q (43 GHz) lacking in the south

K-band: HartRAO to Tidbinbilla?

XKa: Malargüe, Argentina to Tidbinbilla, Australia



# Outline

JPL

## I. Concepts and Background:

- A. What is a Reference frame? Concepts, uses, desired properties
- B. Networks: The instruments used to build the frame
  - ad hoc, VLBA, EVN, Global, DSN, LBA, AuScope, etc.
- C. Brief history of Astrometry: The ‘fixed’ stars aren’t so fixed.
  - 1. Precession, proper motion, nutation, parallax
  - 2. Invention of radio astronomy. VLBI’s pursuit of (sub)milli-arsecond accuracy.

## II. Celestial Frames built using VLBI

- A. Surveys: Single dish, connected array: JVAS, AT20G, and VLBI: VCS, LCS
- B. ICRF-1, ICRF-2: The IAU moves to from optical (stars) to radio (quasars)
- C. Higher frequency radio frames: K&Q (24 & 43GHz), XKa (32 GHz)

## III. The Path to the Future:

- A. Error Budgets: a tool for allocating resources for improvement
  - B. Next-generation geodetic VLBI: Ultra-wide 2-14 GHz
  - B. Case study: Path to Improved X/Ka (8.4/32 GHz) Frame
  - C. ICRF-3: the next standard radio frame
- D. Gaia: the return of optical**



## III.D. Gaia Optical Frame

JPL

### Gaia-Optical vs. VLBI-radio:

Celestial Frame tie  
and  
Accuracy Verification

## Gaia: $10^9$ stars

- 500,000 quasars  $V < 20$   
20,000 quasars  $V < 18$
- radio loud 30-300+ mJy

*and*

optically bright:  $V < 18$   
 $\sim 2000$  quasars

- Accuracy  
 $70 \mu\text{as}$  @  $V=18$   
 $25 \mu\text{as}$  @  $V=16$

## References:

Lindgren et al, IAU 248, 2008  
<http://adsabs.harvard.edu/abs/2008IAUS..248..217L>

Mignard, IAU, JD-7, 2012  
[http://referencesystems.info/uploads/3/0/3/0/3030024/fmignard\\_iau\\_jd7\\_s3.pdf](http://referencesystems.info/uploads/3/0/3/0/3030024/fmignard_iau_jd7_s3.pdf)  
<http://adsabs.harvard.edu/abs/2012IAUJD...7E..27M>



Launch in  
Fall 2013



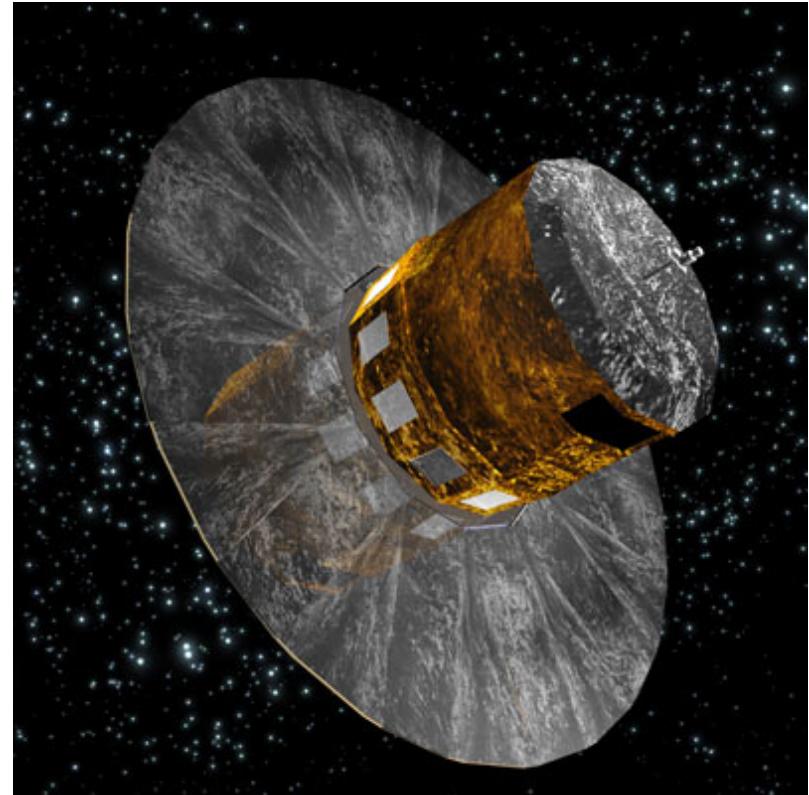


Figure credit: [http://www.esa.int/esaSC/120377\\_index\\_1\\_m.html#subhead7](http://www.esa.int/esaSC/120377_index_1_m.html#subhead7)


# Optical vs. Radio positions

Positions differences from:

- Astrophysics of emission centroids
  - radio: synchrotron from jet
  - optical: synchrotron from jet?  
non-thermal ionization from corona?  
big blue bump from accretion disk?
- Instrumental errors both radio & optical
- Analysis errors

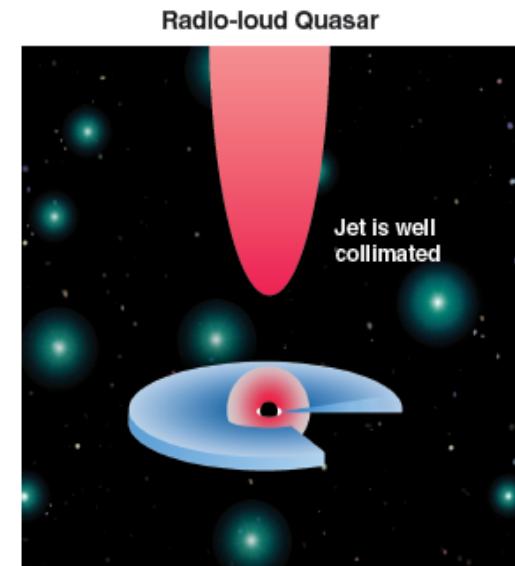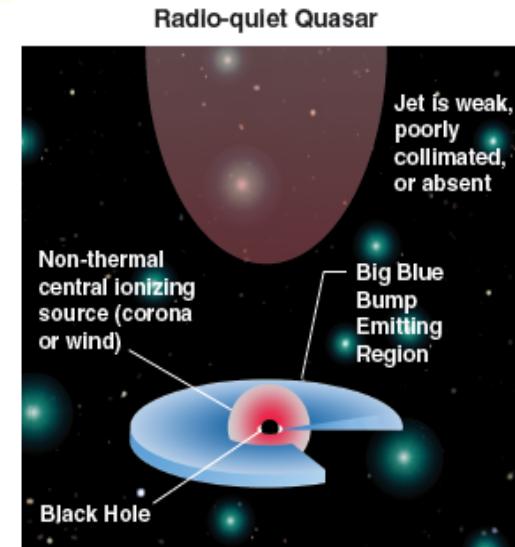

Credit: Wehrle et al, *μas Science*, Socorro, 2009  
<http://adsabs.harvard.edu/abs/2009astro2010S.310W>

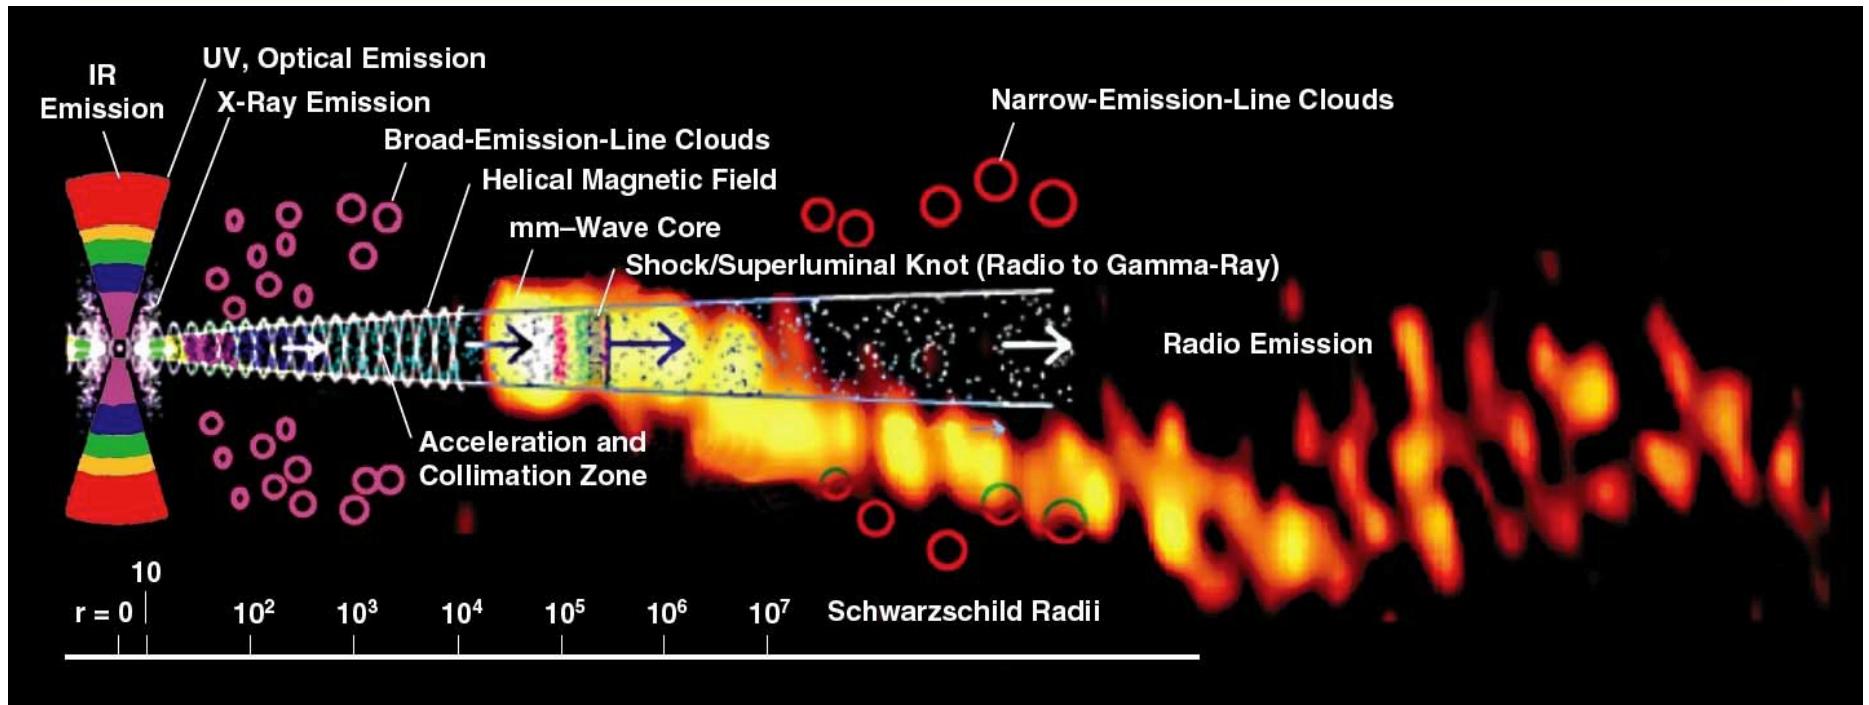

Credit: A. Marscher, Proc. Sci., Italy, 2006.  
 Overlay image: Krichbaum, et al, IRAM, 1999.  
 Montage: Wehrle et al, ASTRO-2010, no. 310.

Positions differences from ‘core shift’

- wavelength dependent shift in radio centroid.
- *3.6cm to 9mm core shift:*

*100  $\mu$ as in phase delay centroid?*





*<<100  $\mu$ as in group delay centroid? (Porcas, AA, 505, 1, 2009)*

- shorter wavelength closer to Black hole and Optical: 9mm X/Ka better



# Source Structure vs. Wavelength

JPL

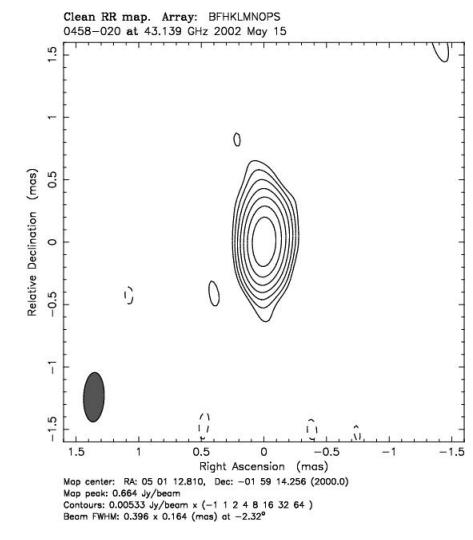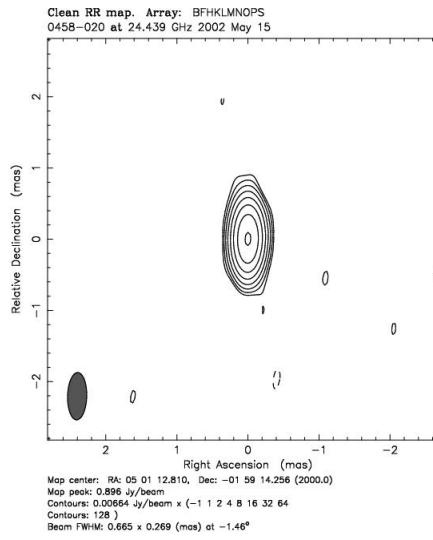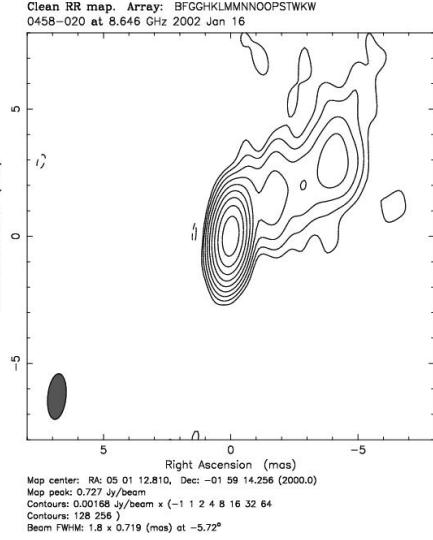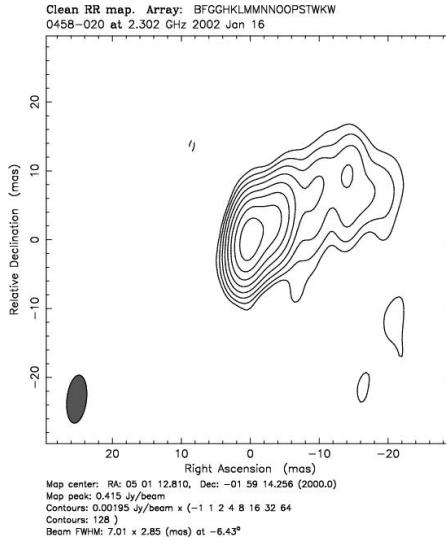

S-band  
2.3 GHz  
13.6cm

X-band  
8.6 GHz  
3.6cm

K-band  
24 GHz  
1.2cm

Q-band  
43 GHz  
0.7cm



Ka-band  
32 GHz  
0.9cm

The sources become better ----->

# Optical brightness of X/Ka sources

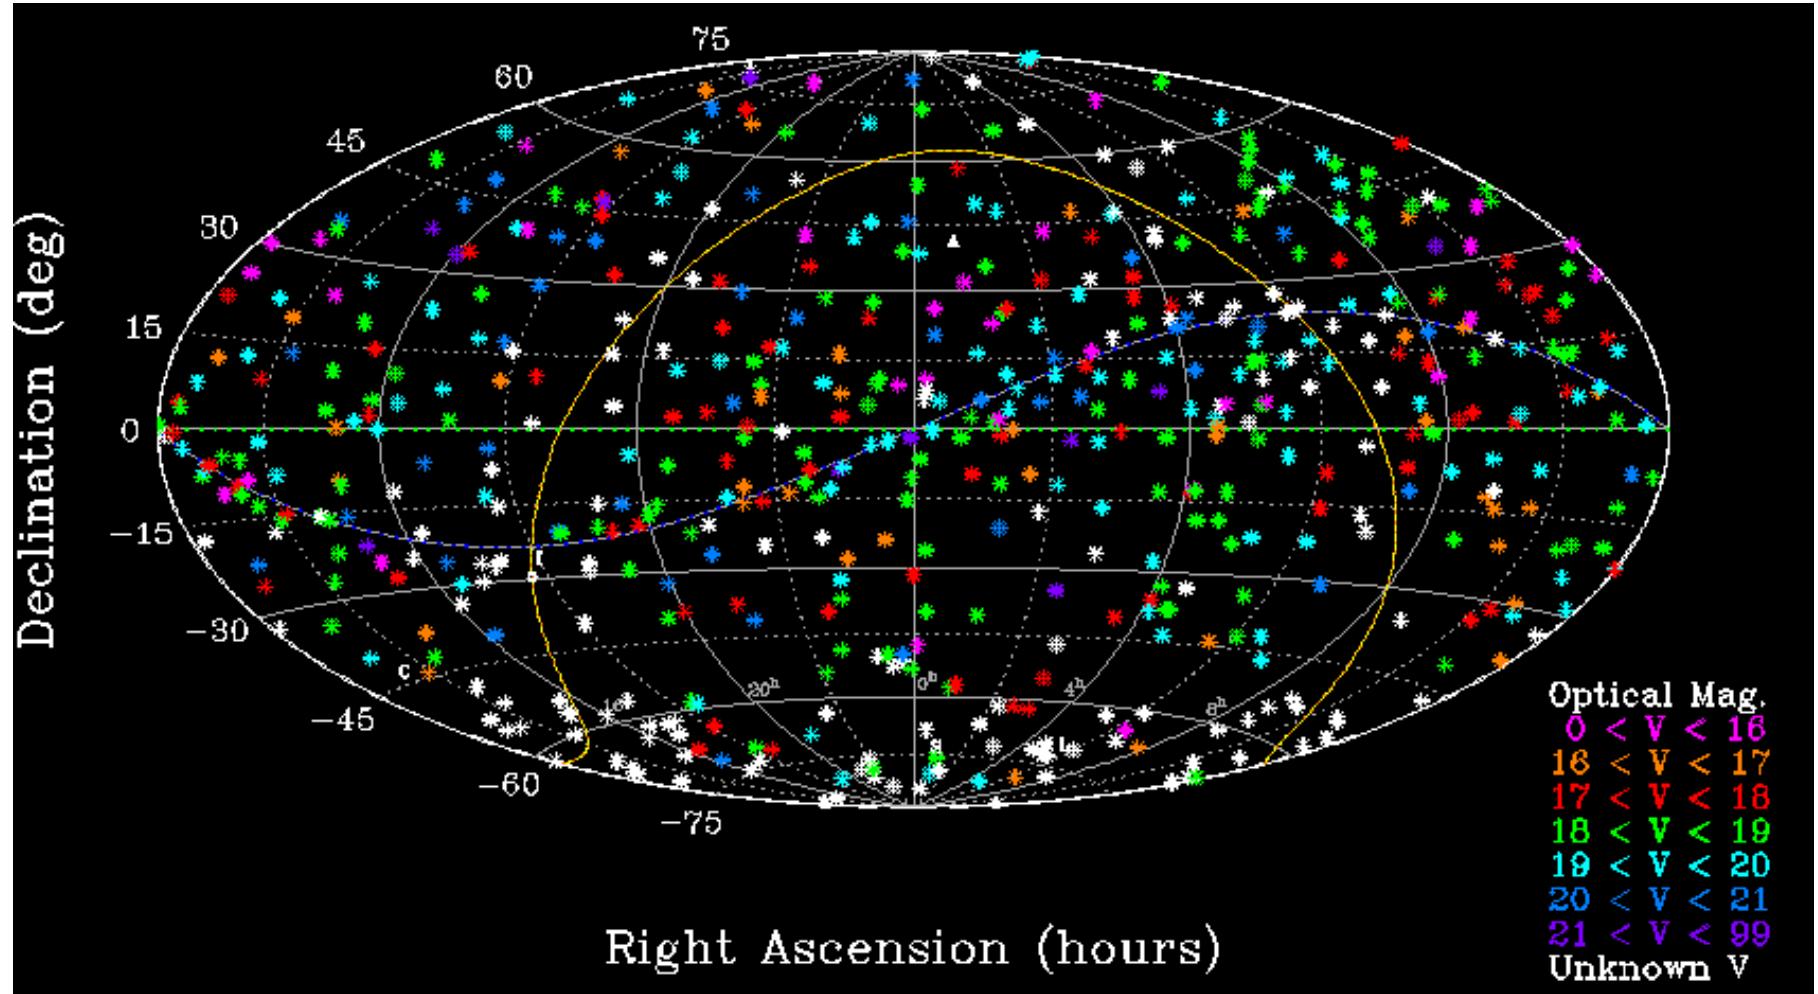


Figure credit: C.S. Jacobs et al, EVGA, 2013

Median optical magnitude  $V_{\text{med}} = 18.6$  magnitude ( $\sim 110$  obj. no data)  
 $> 146$  of 577 objects optically bright by Gaia standard ( $V < 18$ )



# Gaia Optical vs. X/Ka frame tie

JPL

- Simulated Gaia measurement errors (sigma RA, Dec)  
median sigmas  $\sim 100 \mu\text{as}$  per component
- VLBI XKa radio sigmas  $\sim 200 \mu\text{as}$  per component and improving
- Covariance calculation of 3-D rotational tie  
using current 9mm radio sigmas and simulated Gaia sigmas  
 $R_x \pm 14 \mu\text{as}$       <- Weak. Needs south polar VLBI (Dec  $< -45^\circ$ )  
 $R_y \pm 11 \mu\text{as}$   
 $R_z \pm 10 \mu\text{as}$
- Now limited by radio sigmas for which 2-3X improvement possible.  
Potential for rotation sigmas  $\sim 5 \mu\text{as}$  per frame tie component



# Conclusions



## I. Concepts and Background:

- A. Desire nonrotating, non-accelerating frame. Use a quasi-inertial with some accelerations
- B. Networks: The instruments used to build the frame
  - ad hoc, VLBA, EVN, Global, DSN, LBA, AuScope, etc.
- C. Brief history of Astrometry: The ‘fixed’ stars aren’t so fixed.
  - 1. Precession, proper motion, nutation, parallax
  - 2. Invention of radio astronomy. VLBI’s pursuit of sub-milli-arsecond accuracy.

## II. Celestial Frames built using VLBI

- A. Surveys: Single dish,  
connected arrays: Jodrell-VLA (JVAS, north), ATCA 20 GHz (AT20G, south),  
VLBI ~mas: VLBA Cal Survey (north), LBA Cal Survey (south)
- B. ICRF-1 (1998): The IAU moves to from optical (stars) to 212 Defining quasars.  
ICRF-2 (2009) : 295 defining sources, 3414 total,  $40 \mu\text{as}$  systematic floor
- C. Higher frequency radio frames: K&Q (24 & 43GHz), X/Ka (32 GHz)

## III. The Path to the Future:

- A. Error Budgets: a tool for allocating resources for improvement
- B. Case study: Improved X/Ka Frame: SNR, Instrumentation, Troposphere, *Geometry*
- C. ICRF-3 goals: 2018, improve south, improve VCS, improve K & X/Ka
- D. Gaia: 2021 the return of optical, 500,000 quasars, ~billion total sources




*Y yo, minimo ser,  
ebrio del gran vacío constelado,  
a semejanza, a imagen del misterio,  
me sentí parte pura del abismo,  
rodé con las estrellas,  
mi corazón se desató en el viento.*

- Pablo Neruda

*And I, infinitesimal being,  
inebriated on the great starry void,  
likeness, image of mystery,  
I felt myself a pure part of the abyss,  
I rode with the stars,  
my heart broke free onto the open sky.*

NGC 2207 & IC 2163; Credit: NASA and The Hubble Heritage Team (STScI/AURA)

Acknowledgment: D.M. Elmegreen (Vassar College) and B.G. Elmegreen (IBM Research Division)

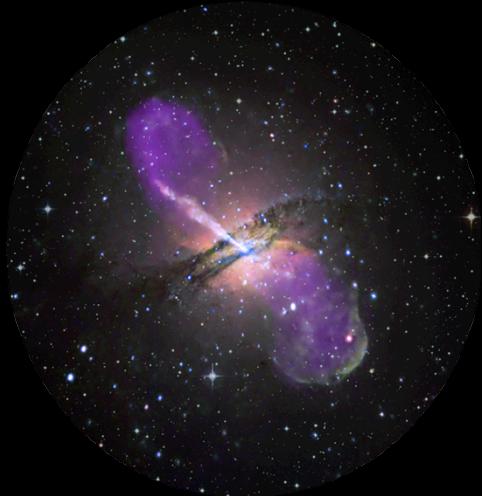

*Estrellas, que rodean, señas,  
Ojos, mis ojos captan la luz,  
suave palpitar de mi corazon,  
llevado en alto por la brisa  
vuelo de mi alma,  
libre, nacida de nuevo  
bajo un cielo maravilloso.*

-C.S. Jacobs : ©2013

(inspirado en un verso de Abraham Kron)

## Thank You for your Attention



Photo: ©1986 C.S. Jacobs, All rights reserved